



...keeps you moving

Why **VFLEX** ULTRA?

40%
More Load Capacity

**Enhanced
Traction**



30%
Less Pressure On Soil

**Fuel
Efficient**



Soil Friendly Tyre Technology For Smarter Farming

- ✓ Engineered for High-Performance Tractors.
- ✓ Perfect for Both Field Work and Transport.
- ✓ Designed to Perform Under Pressure.



TECHNOLOGIES



VF Tech



Reinforced Bead



High Speed Rated



Narrow Rim Compatible



Self-Cleaning Tread

PERFORMANCE



Less Compaction
Higher Productivity



Same Time,
More Yield



Lower Fuel,
Lower Cost

APPLICATIONS



Field Work



Row Crop



Transport



Harvesting



Spraying



Soil Tillage



LOAD RANGE

LOAD RANGE	PLY RATING
A	2
B	4
C	6
D	8
E	10
F	12

LOAD RANGE	PLY RATING
G	14
H	16
J	18
L	20
M	22
N	24

TIRE TYPE NOMENCLATURE	
F-1	Agricultural Single Rib Tread
F-2	Agricultural Multiple- Rib Tread
F-3	Industrial Multiple- Rib Tread
I-1	Rib Tread
I-2	Moderate Tread
I-3	Traction Tread
R-1	Drive Wheel, Regular tread
R-1W	Drive Wheel, Wet Traction Tread
R-2	Drive Wheel, Cane & Rice, Deep
R-3	Drive Wheel, Shallow Tread
R-4	Drive Wheel, Industrial Tractor tread
HF-1	Shallow Tread
HF-2	Regular Lug Tread
HF-3	Deep Lug Tread

TIRE TYPE NOMENCLATURE	
HF-4	Extra Deep Tread
E-2	Traction Regular Tread
E-3	Rock Regular Tread
E-4	Rock Deep Tread
E-7	Flotation Tread
L-2	Traction Regular Tread
L-3	Rock Regular Tread
L-4	Rock Deep Tread
L-5	Rock Extra Deep Tread
L-6	Rock Extra Deep Tread
L-4S	Smooth Deep Tread
L-5S	Smooth Extra Deep Tread
L-6S	Smooth Extra Deep Tread
G-2	Traction Regular Tread
G-3	Rock Regular Tread
C-1	Smooth Tread

OTHER DESIGNATIONS AND DEFINITIONS	
NHS	Not for highway service
SL	Service limited to Agricultural use
FI	Implement tire, towed highway service
ST	Special tires for trailer in highway service
ML	Mining and logging intermittent highway service
IF	20% higher load at the same inflation
VF	40% higher load at the same inflation

RCI	RC (inch)	REV/MILE
0	20	3219
1	21	3065
2	22	2900
3	23	2751
4	24	2617
5	26	2476
6	27	2349
7	28	2335
8	30	2118
9	31	2012
10	33	1905
11	35	1808
12	37	1721
13	39	1634
14	41	1547

RCI	RC (inch)	REV/MILE
15	43	1470
16	45	1393
17	48	1325
18	51	1252
19	53	1192
20	56	1129
21	59	1073
22	62	1019
23	66	967
24	69	917
25	73	870
26	77	825
27	81	783
28	85	743
29	90	706

RCI	RC (inch)	REV/MILE
30	95	669
31	100	636
32	105	603
33	111	573
34	117	543
35	123	516
36	130	489
37	136	464
38	144	440
39	152	418
40	160	397
41	168	376
42	177	357
43	187	339
44	197	322

RCI	RC (inch)	REV/MILE
45	207	305
46	219	290
47	230	275
48	243	261
49	256	248
50	269	235
51	284	223
52	299	212
53	315	201
54	332	191
55	350	181
56	369	172
57	389	163



Radial
Agriculture
Tyres





V-FLEX ULTRA

STEEL BELTED RADIAL TRACTOR TYRES (R-1W)

- Self cleaning tread design.
- Round shoulders minimize influence on the crop roots.
- Optimum lug shape and angle provide an excellent grip.
- Long service life thanks to the use of a wear resistant tread compound.
- Cut and puncture resistant.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
VF 750/65R26 CFO	DW 27B	DW 25B DW 28B	TL	750	29.5	1635	64.4	704	27.7	4915	193.5	177 A8	177 B	7300	16060	2.4	35	775
VF 750/65R26 CFO+	DW 27B	DW 25B DW 28B	TL	750	29.5	1635	64.4	704	27.7	4915	193.5	180 A8	177 B	8000	17600	2.8	41	775
VF 600/60R30	DW 20B	DW 21B	TL	598	23.5	1485	58.5	643	25.3	4400	173.2	147 A8	147 B	3075	6765	1.0	14	700
VF 600/60R30	DW 20B	DW 21B	TL	598	23.5	1485	58.5	643	25.3	4400	173.2	158 D	161 A8	4250	9350	1.6	23	700
VF 600/60R30	DW 20B	DW 21B	TL	598	23.5	1485	58.5	643	25.3	4400	173.2	162 D	159 E	4750	10450	2.0	29	700
VF 600/70R30	DW 21B	DW 20B	TL	605	23.8	1605	63.2	704	27.7	4715	185.6	165 D	161 E	5150	11330	1.6	23	750
VF 600/70R30	DW 21B	DW 20B	TL	605	23.8	1605	63.2	704	27.7	4715	185.6	168 D	165 E	5600	12320	2.0	29	750
VF 650/60R38	DW 21B	DW 20B	TL	650	25.6	1745	68.7	776	30.6	5235	206.1	166 D	169 A8	5300	11660	1.6	23	825
VF 800/70R38 CFO	DW 28B	25B 27B 30B	TL	805	31.7	2085	82.1	889	35.0	6153	242.2	193 A8	193 B	11500	25300	2.8	41	975
VF 800/70R38	DW 28B	25B 27B 30B	TL	805	31.7	2085	82.1	889	35.0	6153	242.2	184 D	187 A8	9750	21450	1.6	23	975
VF 800/70R38	DW 28B	25B 27B 30B	TL	805	31.7	2085	82.1	889	35.0	6153	242.2	187 D	184 E	9750	21450	2.0	29	975
VF 580/85R42 CFO	DW 18L	DW 20B DW 21B	TL	605	23.8	2055	80.9	922	36.3	6165	242.7	183 A8	183 B	8750	19250	2.8	41	975
VF 710/70R42	DW 25B	DW 23B DW 24B	TL	715	28.1	2060	81.1	920	36.2	6180	243.3	179 D	182 A8	7750	17050	1.6	23	975
VF 710/70R42	DW 25B	DW 23B DW 24B	TL	715	28.1	2060	81.1	920	36.2	6180	243.3	182 D	179 E	8500	18700	2.0	29	975
VF 710/70R42 CFO+	DW 25B	DW 23B DW 24B	TL	715	28.1	2060	81.1	920	36.2	6180	243.3	188 A8	188 B	10000	22000	2.8	41	975
VF 710/70R42 CFO	DW 25B	DW 23B DW 24B	TL	715	28.1	2060	81.1	920	36.2	6180	243.3	190 A8	190 B	10600	23320	3.2	46	975
VF 380/90R46	W 13	DW 12A W 13B DW 13	TL	400	15.4	1850	72.8	855	33.7	5665	223.0	173 D	170 E	6500	14300	4.4	64	900
VF 480/80R50	DW 16L	DW 15L	TL	479	18.9	2090	82.3	247	9.8	6220	245.0	179 D	182 A8	8500	18700	3.6	52	975



I-FLEX ULTRA

STEEL BELTED RADIAL TRACTOR TYRES (R-1W)

- Self cleaning tread design.
- Round shoulders minimize influence on the crop roots.
- Optimum lug shape and angle provide an excellent grip.
- Long service life thanks to the use of a wear resistant tread compound.
- Cut and puncture resistant.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
IF 480/70R34	W 16L	W 18L DW 18L	TL	490	19.3	1594	62.8	721	28.4	4767	187.7	143 D	146 A8	2725	5995	1.6	23	750
IF 800/70R38	DW 27B	DW 25B	TL	800	31.5	2090	82.3	925	36.4	6185	243.5	178 D	173 D	7500	16500	1.6	23	975
IF 800/70R38 CFO+	DW 27B	DW 25B	TL	800	31.5	2090	82.3	925	36.4	6185	243.5	187 B	187 A8	9750	21450	2.0	29	975
IF 800/70R38 CFO	DW 27B	DW 25B	TL	800	31.5	2090	82.3	925	36.4	6185	243.5	190 D	190 A8	10600	23320	3.2	46	975
IF 580/85R42	DW 18L	-	TL	590	23.2	2045	80.5	924	36.4	6047	238.1	178 D	178 A8	7500	16500	2.8	41	975



I-FLEX I-1

STEEL BELTED RADIAL TRACTOR TYRES (R-1W)

- Round shoulders minimize influence on the crop roots.
- Optimum lug shape and angle provide an excellent grip.
- Cut and puncture resistant.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
IF 210/75R15	6	-	TL	210	8.3	700	27.6	312	12.3	2180	85.8	115 D	118 A8	1215	2673	3.5		41
IF 280/70R15	8	-	TL	275	10.8	775	30.5	352	13.9	2350	92.5	128 D	131 A8	1800	3960	4.4		64
IF 320/70R15	10	-	TL	320	12.6	830	32.7	363	14.3	2590	102.0	144 D	147 A8	2800	6160	4.8		70



SR-666

RADIAL TRACTOR TYRES (R-1W) (65 SERIES)

- Radial tyre with balanced characteristics for wide range of applications both on the field and on the road.
- Larger ground contact patch makes the tyre well suited for handling grassland.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
320/65R16	W 10	W 9 W 10	TL	319	12.6	875	34.4	395	15.5	2590	102.0	117 D	120 A8	1285	2827	2.4	35	390
320/65R18	W 10	W 9 W 10	TL	319	12.6	875	34.4	395	15.5	2590	102.0	119 D	122 A8	1360	2992	2.4	35	425
440/65R24	W 14L	W 13 W 15L	TL	442	17.4	1181	46.5	538	21.2	3546	139.6	128 D	125 E	1800	3960	2.4	35	575
440/65R24	W 14L	W 13 W 15L	TL	442	17.4	1181	46.5	538	21.2	3546	139.6	128 D	131 A8	1800	3960	2.4	35	575
440/65R24	W 14L	W 13 W 15L	TL	442	17.4	1181	46.5	538	21.2	3546	139.6	135 D	138 A8	2180	4800	2.4	35	575
480/65R24	W 15L	W 14L	TL	480	18.9	1240	48.8	568	22.4	3810	150.0	133 D	136 A8	2060	4532	1.6	23	600
480/65R24	W 15L	W 14L	TL	480	18.9	1240	48.8	568	22.4	3810	150.0	140 D	143 A8	2500	5500	2.4	35	600
540/65R24	W 16L	W 18L	TL	531	20.9	1313	51.7	589	23.2	3929	154.7	146 D	149 A8	3000	6600	2.4	35	625
440/65R28	W 14L	W 13 W 15L	TL	442	17.4	1283	50.5	589	23.2	3879	152.7	131 D	134 A8	1950	4290	1.6	23	625
440/65R28	W 14L	W 13 W 15L	TL	442	17.4	1283	50.5	589	23.2	3879	152.7	138 D	141 A8	2360	5195	2.4	35	625
480/65R28	W 15L	W 14L	TL	480	18.9	1335	52.6	610	24.0	4059	159.8	136 D	133 E	2240	4928	1.6	23	650
480/65R28	W 15L	W 14L	TL	480	18.9	1335	52.6	610	24.0	4059	159.8	136 D	139 A8	2650	5830	1.6	23	650
480/65R28	W 15L	W 14L	TL	480	18.9	1335	52.6	610	24.0	4059	159.8	142 D	145 A8	2650	5830	2.4	35	650
540/65R28	W 16L	W 18L	TL	540	21.2	1413	55.6	643	25.3	4253	167.5	139 D	142 A8	2430	5346	1.6	23	675
540/65R28	W 16L	W 18L	TL	540	21.2	1413	55.6	643	25.3	4253	167.5	142 D	139 E	2650	5830	1.6	23	675
540/65R28	W 16L	W 18L	TL	540	21.2	1413	55.6	643	25.3	4253	167.5	142 D	145 A8	2650	5830	1.6	23	675
540/65R28	W 16L	W 18L	TL	540	21.2	1413	55.6	643	25.3	4253	167.5	149 D	152 A8	3250	7150	2.4	35	675
540/65R28	W 16L	W 18L	TL	540	21.2	1413	55.6	643	25.3	4253	167.5	149 D	146 E	3250	7150	2.4	35	675
540/65R28	W 16L	W 18L	TL	540	21.2	1413	55.6	643	25.3	4253	167.5	154 D	157 A8	3750	8250	3.2	46	675
600/65R28	DW20B	W 18L	TL	612	24.1	1492	58.7	670	26.4	4470	176.0	147 A8	144 B	3075	6765	1.6	23	700

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
600/65R28	DW20B	W 18L	TL	612	24.1	1492	58.7	670	26.4	4470	176.0	147 D	150 A8	3075	6765	1.6	23	700
600/65R28	DW20B	W 18L	TL	612	24.1	1492	58.7	670	26.4	4470	176.0	154 A8	154 B	3750	8250	2.4	35	700
600/65R28	DW20B	W 18L	TL	612	24.1	1492	58.7	670	26.4	4470	176.0	151 D	154 A8	3450	7590	2.4	35	700
600/65R28	DW20B	W 18L	TL	612	24.1	1492	58.7	670	26.4	4470	176.0	154 D	151 E	3750	8250	2.4	35	700
600/65R28	DW20B	W 18L	TL	612	24.1	1492	58.7	670	26.4	4470	176.0	165 D	168 A8	5150	11330	2.4	35	700
540/65R30	W 16L	W 18L	TL	530	20.9	1465	57.7	670	26.4	4403	173.3	143 D	146 A8	2725	5995	1.6	23	700
540/65R30	W 16L	W 18L	TL	530	20.9	1465	57.7	670	26.4	4403	173.3	143 D	140 E	2725	5995	1.6	23	700
540/65R30	W 16L	W 18L	TL	530	20.9	1465	57.7	670	26.4	4403	173.3	143 A8	140 B	2725	5995	1.6	23	700
540/65R30	W 16L	W 18L	TL	530	20.9	1465	57.7	670	26.4	4403	173.3	150 D	153 A8	3350	7370	2.4	35	700
540/65R34	W 16L	W 18L	TL	530	20.9	1570	61.8	712	28.0	4742	186.7	145 D	148 A8	2900	6380	1.6	23	750
540/65R34	W 16L	W 18L	TL	530	20.9	1570	61.8	712	28.0	4742	186.7	145 D	142 E	2900	6380	1.6	23	750
540/65R34	W 16L	W 18L	TL	530	20.9	1570	61.8	712	28.0	4742	186.7	152 D	155 A8	3550	7810	2.4	35	750
600/65R34	DW 20B	W 18L	TL	611	24.1	1644	64.7	742	29.2	4960	195.3	151 D	154 A8	3450	7590	1.6	23	775
600/65R34	DW 20B	W 18L	TL	611	24.1	1644	64.7	742	29.2	4960	195.3	157 D	160 A8	4125	9075	2.4	35	775
600/65R34	DW 20B	W 18L	TL	611	24.1	1644	64.7	742	29.2	4960	195.3	161 D	164 A8	4625	10175	3.2	46	775
540/65R38	W 16L	W 18L	TL	531	20.9	1667	65.6	760	29.9	5059	199.2	147 D	144 E	3075	6765	2.4	35	800
540/65R38	W 16L	W 18L	TL	531	20.9	1667	65.6	760	29.9	5059	199.2	147 D	150 A8	3075	6765	2.4	35	800
540/65R38	W 16L	W 18L	TL	531	20.9	1667	65.6	760	29.9	5059	199.2	153 D	156 A8	3660	8050	2.4	35	800
600/65R38	DW 20B	W 18L	TL	600	23.6	1745	68.7	790	31.1	5248	206.6	153 D	156 A8	3660	8050	1.6	23	825
600/65R38	DW 20B	W 18L	TL	600	23.6	1745	68.7	790	31.1	5248	206.6	153 D	150 E	3660	8050	1.6	23	825
600/65R38	DW 20B	W 18L	TL	600	23.6	1745	68.7	790	31.1	5248	206.6	159 D	162 A8	4375	9625	2.4	35	825
600/65R38	DW 20B	W 18L	TL	600	23.6	1745	68.7	790	31.1	5248	206.6	165 D	168 A8	5150	11330	3.2	46	825
650/65R38	DW 20B	W 9	TL	643	25.3	1808	71.2	830	32.7	5479	215.7	153 D	150 E	3660	8050	1.6	23	875
650/65R38	DW 20B	W 9	TL	643	25.3	1808	71.2	830	32.7	5479	215.7	157 D	154 E	4125	9075	1.6	23	875
650/65R38	DW 20B	W 9	TL	643	25.3	1808	71.2	830	32.7	5479	215.7	157 D	160 A8	4125	9075	1.6	23	875
650/65R38	DW 20B	W 9	TL	643	25.3	1808	71.2	830	32.7	5479	215.7	158 A8	154 B	4125	9075	1.6	23	875
650/65R38	DW 20B	W 9	TL	643	25.3	1808	71.2	830	32.7	5479	215.7	163 D	166 A8	4875	10725	2.4	35	875

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
650/65R38	DW 20B	W 9	TL	643	25.3	1808	71.2	830	32.7	5479	215.7	169 D	172 A8	5800	12760	3.2	46	875
650/65R42	DW 20B	DW 21B DW 23B	TL	645	25.7	1913	75.0	878	35.0	5810	229.0	158 A8	158 B	4250	9350	1.6	23	875
650/65R42	DW 20B	DW 21B DW 23B	TL	645	25.7	1913	75.0	878	35.0	5810	229.0	158 D	155 E	4250	9350	1.6	23	875
650/65R42	DW 20B	DW 21B DW 23B	TL	645	25.7	1913	75.0	878	35.0	5810	229.0	158 D	161 A8	4250	9350	1.6	23	875
650/65R42	DW 20B	DW 21B DW 23B	TL	645	25.7	1913	75.0	878	35.0	5810	229.0	165 D	168 A8	5150	11330	2.4	35	875
650/65R42	DW 20B	DW 21B DW 23B	TL	645	25.7	1913	75.0	878	35.0	5810	229.0	170 D	173 A8	6000	13200	3.2	46	875



SR-666

STEEL BELTED RADIAL TRACTOR TYRES (R-1W) (65 SERIES)

- Enhance strength and stability.
- Resistant to punctures and cuts.
- Distribute the load evenly across the tyres footprint.
- Self cleaning tread design.
- Combination of tread design and special compound, reduces fuel consumption and improves efficiency without scarifying traction or performance.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
320/65R16	W 10	W 9 W 10	TL	319	12.6	875	34.4	395	15.5	2590	102.0	117 D	120 A8	1285	2827	2.4	35	390
320/65R18	W 10	W 9 W 10	TL	319	12.6	875	34.4	395	15.5	2590	102.0	119 D	122 A8	1360	2992	2.4	35	425
440/65R24	W 14L	W 13 W 15L	TL	442	17.4	1181	46.5	538	21.2	3546	139.6	128 D	125 E	1800	3960	2.4	35	575
440/65R24	W 14L	W 13 W 15L	TL	442	17.4	1181	46.5	538	21.2	3546	139.6	128 D	131 A8	1800	3960	2.4	35	575
440/65R24	W 14L	W 13 W 15L	TL	442	17.4	1181	46.5	538	21.2	3546	139.6	135 D	138 A8	2180	4800	2.4	35	575
480/65R24	W 15L	W 14L	TL	480	18.9	1240	48.8	568	22.4	3810	150.0	133 D	136 A8	2060	4532	1.6	23	600
480/65R24	W 15L	W 14L	TL	480	18.9	1240	48.8	568	22.4	3810	150.0	140 D	143 A8	2500	5500	2.4	35	600
540/65R24	W 16L	W 18L	TL	531	20.9	1313	51.7	589	23.2	3929	154.7	146 D	149 A8	3000	6600	2.4	35	625
440/65R28	W 14L	W 13 W 15L	TL	442	17.4	1283	50.5	589	23.2	3879	152.7	131 D	134 A8	1950	4290	1.6	23	625
440/65R28	W 14L	W 13 W 15L	TL	442	17.4	1283	50.5	589	23.2	3879	152.7	138 D	141 A8	2360	5195	2.4	35	625
480/65R28	W 15L	W 14L	TL	480	18.9	1335	52.6	610	24.0	4059	159.8	136 D	133 E	2240	4928	1.6	23	650
480/65R28	W 15L	W 14L	TL	480	18.9	1335	52.6	610	24.0	4059	159.8	136 D	139 A8	2650	5830	1.6	23	650
480/65R28	W 15L	W 14L	TL	480	18.9	1335	52.6	610	24.0	4059	159.8	142 D	145 A8	2650	5830	2.4	35	650
540/65R28	W 16L	W 18L	TL	540	21.2	1413	55.6	643	25.3	4253	167.5	139 D	142 A8	2430	5346	1.6	23	675
540/65R28	W 16L	W 18L	TL	540	21.2	1413	55.6	643	25.3	4253	167.5	142 D	139 E	2650	5830	1.6	23	675
540/65R28	W 16L	W 18L	TL	540	21.2	1413	55.6	643	25.3	4253	167.5	142 D	145 A8	2650	5830	1.6	23	675
540/65R28	W 16L	W 18L	TL	540	21.2	1413	55.6	643	25.3	4253	167.5	149 D	152 A8	3250	7150	2.4	35	675
540/65R28	W 16L	W 18L	TL	540	21.2	1413	55.6	643	25.3	4253	167.5	149 D	146 E	3250	7150	2.4	35	675
540/65R28	W 16L	W 18L	TL	540	21.2	1413	55.6	643	25.3	4253	167.5	154 D	157 A8	3750	8250	3.2	46	675
600/65R28	DW20B	W 18L	TL	612	24.1	1492	58.7	670	26.4	4470	176.0	147 A8	144 B	3075	6765	1.6	23	700

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
600/65R28	DW20B	W 18L	TL	612	24.1	1492	58.7	670	26.4	4470	176.0	147 D	150 A8	3075	6765	1.6	23	700
600/65R28	DW20B	W 18L	TL	612	24.1	1492	58.7	670	26.4	4470	176.0	154 A8	154 B	3750	8250	2.4	35	700
600/65R28	DW20B	W 18L	TL	612	24.1	1492	58.7	670	26.4	4470	176.0	151 D	154 A8	3450	7590	2.4	35	700
600/65R28	DW20B	W 18L	TL	612	24.1	1492	58.7	670	26.4	4470	176.0	154 D	151 E	3750	8250	2.4	35	700
600/65R28	DW20B	W 18L	TL	612	24.1	1492	58.7	670	26.4	4470	176.0	165 D	168 A8	5150	11330	2.4	35	700
540/65R30	W 16L	W 18L	TL	530	20.9	1465	57.7	670	26.4	4403	173.3	143 D	146 A8	2725	5995	1.6	23	700
540/65R30	W 16L	W 18L	TL	530	20.9	1465	57.7	670	26.4	4403	173.3	143 D	140 E	2725	5995	1.6	23	700
540/65R30	W 16L	W 18L	TL	530	20.9	1465	57.7	670	26.4	4403	173.3	143 A8	140 B	2725	5995	1.6	23	700
540/65R30	W 16L	W 18L	TL	530	20.9	1465	57.7	670	26.4	4403	173.3	150 D	153 A8	3350	7370	2.4	35	700
540/65R34	W 16L	W 18L	TL	530	20.9	1570	61.8	712	28.0	4742	186.7	145 D	148 A8	2900	6380	1.6	23	750
540/65R34	W 16L	W 18L	TL	530	20.9	1570	61.8	712	28.0	4742	186.7	145 D	142 E	2900	6380	1.6	23	750
540/65R34	W 16L	W 18L	TL	530	20.9	1570	61.8	712	28.0	4742	186.7	152 D	155 A8	3550	7810	2.4	35	750
600/65R34	DW 20B	W 18L	TL	611	24.1	1644	64.7	742	29.2	4960	195.3	151 D	154 A8	3450	7590	1.6	23	775
600/65R34	DW 20B	W 18L	TL	611	24.1	1644	64.7	742	29.2	4960	195.3	157 D	160 A8	4125	9075	2.4	35	775
600/65R34	DW 20B	W 18L	TL	611	24.1	1644	64.7	742	29.2	4960	195.3	161 D	164 A8	4625	10175	3.2	46	775
540/65R38	W 16L	W 18L	TL	531	20.9	1667	65.6	760	29.9	5059	199.2	147 D	144 E	3075	6765	2.4	35	800
540/65R38	W 16L	W 18L	TL	531	20.9	1667	65.6	760	29.9	5059	199.2	147 D	150 A8	3075	6765	2.4	35	800
540/65R38	W 16L	W 18L	TL	531	20.9	1667	65.6	760	29.9	5059	199.2	153 D	156 A8	3660	8050	2.4	35	800
600/65R38	DW 20B	W 18L	TL	600	23.6	1745	68.7	790	31.1	5248	206.6	153 D	156 A8	3660	8050	1.6	23	825
600/65R38	DW 20B	W 18L	TL	600	23.6	1745	68.7	790	31.1	5248	206.6	153 D	150 E	3660	8050	1.6	23	825
600/65R38	DW 20B	W 18L	TL	600	23.6	1745	68.7	790	31.1	5248	206.6	159 D	162 A8	4375	9625	2.4	35	825
600/65R38	DW 20B	W 18L	TL	600	23.6	1745	68.7	790	31.1	5248	206.6	165 D	168 A8	5150	11330	3.2	46	825
650/65R38	DW 20B	W 9	TL	643	25.3	1808	71.2	830	32.7	5479	215.7	153 D	150 E	3660	8050	1.6	23	875
650/65R38	DW 20B	W 9	TL	643	25.3	1808	71.2	830	32.7	5479	215.7	157 D	154 E	4125	9075	1.6	23	875
650/65R38	DW 20B	W 9	TL	643	25.3	1808	71.2	830	32.7	5479	215.7	157 D	160 A8	4125	9075	1.6	23	875
650/65R38	DW 20B	W 9	TL	643	25.3	1808	71.2	830	32.7	5479	215.7	158 A8	154 B	4125	9075	1.6	23	875
650/65R38	DW 20B	W 9	TL	643	25.3	1808	71.2	830	32.7	5479	215.7	163 D	166 A8	4875	10725	2.4	35	875

Tolerances: O.D. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
650/65R38	DW 20B	W 9	TL	643	25.3	1808	71.2	830	32.7	5479	215.7	169 D	172 A8	5800	12760	3.2	46	875
650/65R42	DW 20B	DW 21B DW 23B	TL	645	25.7	1913	75.0	878	35.0	5810	229.0	158 A8	158 B	4250	9350	1.6	23	875
650/65R42	DW 20B	DW 21B DW 23B	TL	645	25.7	1913	75.0	878	35.0	5810	229.0	158 D	155 E	4250	9350	1.6	23	875
650/65R42	DW 20B	DW 21B DW 23B	TL	645	25.7	1913	75.0	878	35.0	5810	229.0	158 D	161 A8	4250	9350	1.6	23	875
650/65R42	DW 20B	DW 21B DW 23B	TL	645	25.7	1913	75.0	878	35.0	5810	229.0	165 D	168 A8	5150	11330	2.4	35	875
650/65R42	DW 20B	DW 21B DW 23B	TL	645	25.7	1913	75.0	878	35.0	5810	229.0	170 D	173 A8	6000	13200	3.2	46	875



SR-777

RADIAL TRACTOR TYRES (R-1W) (70/75 SERIES)

- Radial tyre with balanced characteristics for wide range of applications both on the field and on the road.
- Larger ground contact patch makes the tyre well suited for handling grassland.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
200/70R16	W 6	-	TL	198	7.8	686	27.0	312	12.3	2057	81.0	94 A8	94 B	670	1475	2.4	35	330
240/70R16	W 8	W 8L W 9L	TL	241	9.5	742	29.2	335	13.2	2225	87.6	104 A8	104 B	900	1980	2.4	35	350
260/70R16	W 8	W 8L W 9L	TL	258	10.2	770	30.3	345	13.6	2309	90.9	109 A8	109 B	1030	2265	2.4	35	370
280/70R16	W 9	W 8 W 8L W 10	TL	282	11.1	798	31.4	356	14.0	2370	93.3	112 A8	112 B	1120	2465	2.4	35	380
280/70R18	W 9	W 8 W 10	TL	282	11.1	849	33.4	381	15.0	2547	100.3	114 A8	114 B	1180	2595	2.4	35	400
280/70R20	W 9	W 8 W 10	TL	282	11.1	900	35.4	408	16.1	2705	106.5	116 A8	116 B	1250	2750	2.4	35	450
300/70R20	W 9	W 10	TL	295	11.6	952	37.5	428	16.8	2854	112.4	110 A8	107 B	1060	2332	1.6	23	450
300/70R20	W 9	W 10	TL	295	11.6	952	37.5	428	16.8	2854	112.4	120 A8	120 B	1400	3080	2.4	35	450
320/70R20	W 10	W 9 W 11	TL	320	12.6	983	38.7	444	17.5	2964	116.7	123 A8	123 B	1550	3410	2.4	35	475
320/70R20	W 10	W 9 W 11	TL	320	12.6	983	38.7	444	17.5	2964	116.7	130 D	130 A8	1900	4180	3.2	46	475
360/70R20	W 11	W 10 W 12	TL	358	14.1	1041	41.0	470	18.5	3122	122.9	129 A8	129 B	1850	4070	2.4	35	500
380/70R20	W 12	W 11 W 13	TL	380	15.0	1082	42.6	482	19.0	3215	126.6	132 A8	132 B	2000	4400	2.4	35	525
320/70R24	W 10	W 9 W 11	TL	320	12.6	1095	43.1	503	19.8	3240	127.8	116 A8	116 B	1250	2750	1.6	23	525
360/70R24	W 11	W 10 W 11	TL	358	14.1	1153	45.4	518	20.4	3454	136.0	122 A8	119 B	1500	3300	1.6	23	550
360/70R24	W 11	W 10 W 11	TL	358	14.1	1153	45.4	518	20.4	3454	136.0	122 A8	122 B	1500	3300	1.6	23	550
360/70R24	W 11	W 10 W 11	TL	358	14.1	1153	45.4	518	20.4	3454	136.0	133 D	136 A8	2060	4532	3.2	46	550
380/70R24	W 12	W 11 W 13	TL	381	15.0	1191	46.9	538	21.2	3561	140.2	125 A8	125 B	1650	3630	1.6	23	575
380/70R24	W 12	W 11 W 13	TL	381	15.0	1191	46.9	538	21.2	3561	140.2	125 D	128 A8	1650	3630	1.6	23	575
380/70R24	W 12	W 11 W 13	TL	381	15.0	1191	46.9	538	21.2	3561	140.2	125 D	122 E	1650	3630	1.6	23	575
380/70R24	W 12	W 11 W 13	TL	381	15.0	1191	46.9	538	21.2	3561	140.2	130 D	130 A8	1900	4180	2.4	35	575

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
420/70R24	W 13	W 12 W 14L	TL	419	16.5	1222	48.1	579	22.8	3561	144.9	130 A8	127 B	1900	4180	1.6	23	600
420/70R24	W 13	W 12 W 14L	TL	419	16.5	1222	48.1	579	22.8	3561	144.9	130 A8	130 B	1900	4180	1.6	23	600
420/70R24	W 13	W 12 W 14L	TL	419	16.5	1222	48.1	579	22.8	3561	144.9	136 A8	136 B	2240	4928	2.4	35	600
420/70R24	W 13	W 12 W 14L	TL	419	16.5	1222	48.1	579	22.8	3561	144.9	136 D	139 A8	2240	4928	2.4	35	600
750/65R26	DW25B	DW23B DW24B	TL	750	29.5	1636	64.4	737	29.0	4987	196.3	166 A8	166 B	5300	11660	2.4	35	775
750/65R26	DW25B	DW23B DW24B	TL	750	29.5	1636	64.4	737	29.0	4987	196.3	169 B	169 A8	5300	11660	2.8	41	775
750/65R26	DW25B	DW23B DW24B	TL	750	29.5	1636	64.4	737	29.0	4987	196.3	166 D	169 A8	5300	11660	1.6	23	775
750/65R26	DW25B	DW23B DW24B	TL	750	29.5	1636	64.4	737	29.0	4987	196.3	171 A8	171 B	6150	13530	3.2	46	775
360/70R28	W 11	W 10 W 12	TL	360	14.2	1250	49.2	578	22.8	3765	148.2	125 D	128 A8	1650	3630	1.6	23	600
380/70R28	W 12	W 11 W 13	TL	381	15.0	1293	50.9	587	23.1	3884	152.9	127 A8	127 B	1750	3850	1.6	23	625
380/70R28	W 12	W 11 W 13	TL	381	15.0	1293	50.9	587	23.1	3884	152.9	127 D	130 A8	1750	3850	1.6	23	625
380/70R28	W 12	W 11 W 13	TL	381	15.0	1293	50.9	587	23.1	3884	152.9	133 D	136 A8	2060	4532	2.4	35	625
420/70R28	W 13	W 12 W 14L	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	133 A8	133 B	2060	4535	1.6	23	650
420/70R28	W 13	W 12 W 14L	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	133 A8	130 B	2060	4664	1.6	23	650
420/70R28	W 13	W 12 W 14L	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	136 A8	133 B	2240	4928	1.6	23	650
420/70R28	W 13	W 12 W 14L	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	133 D	136 A8	2060	4664	1.6	23	650
420/70R28	W 13	W 12 W 14L	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	133 D	130 E	2060	4664	1.6	23	650
420/70R28	W 13	W 12 W 14L	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	139 D	142 A8	2430	5346	2.4	35	650
480/70R28	W 13	W 15L	TL	480	18.9	1420	55.9	634	25.0	4885	192.3	139 A8	139 B	2500	5500	1.6	23	675
480/70R28	W 15L	W 14L W 16L	TL	480	19.0	1420	55.9	635	25.0	4180	164.6	140 D	143 A8	2500	5500	1.6	23	675
480/70R28	W 15L	W 14L W 16L	TL	480	19.0	1420	55.9	635	25.0	4180	164.6	151 A8	151 B	3450	7590	3.2	46	675
480/70R28	W 13	W 15L	TL	480	18.9	1420	55.9	634	25.0	4885	192.3	151 D	154 A8	3450	7590	3.2	46	675
480/70R30	W 15L	W 14L W 16L	TL	479	19.0	1478	58.2	659	26.0	4372	172.0	141 D	138 E	2575	5665	1.6	23	700
480/70R30	W 15L	W 14L W 16L	TL	479	19.0	1478	58.2	659	26.0	4372	172.0	141 A8	141 B	2575	5665	1.6	23	700
480/70R30	W 15L	W 14L W 16L	TL	479	19.0	1478	58.2	659	26.0	4372	172.0	152 A8	152 B	2965	6523	1.6	23	700
620/75R30	DW 20B	-	TL	622	24.5	1695	66.7	780	30.7	5170	203.5	166 A8	166 B	5300	11660	3.2	46	800
620/75R30	DW 20B	-	TL	622	24.5	1695	66.7	780	30.7	5170	203.5	169 D	172 A8	3450	7590	3.2	46	800

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
400/75R38	W 14	W 14	TL	394	15.5	1570	62.0	730	29.0	4685	184.0	138 A8	138 B	2360	5192	1.6	23	750
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	166 D	169 A8	5300	11660	1.6	23	925
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	166 A8	163 B	5300	11660	1.6	23	925
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	171 D	174 A8	6150	13530	2.4	35	925
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	172 D	175 A8	6300	13860	2.8	41	925
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	172 D	168 E	6300	13860	2.8	41	925
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	175 D	178 A8	6900	15180	2.8	41	925
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	177 D	180 A8	7300	16060	3.2	46	925
710/70R42	DW 23B	DW 25B	TL	716	28.2	2060	81.1	922	36.3	6175	243.1	168 D	171 A8	5600	12320	1.6	23	975
710/70R42	DW 23B	DW 25B	TL	716	28.2	2060	81.1	922	36.3	6175	243.1	173 D	176 A8	6500	14300	2.4	35	975
710/70R42	DW 23B	DW 25B	TL	716	28.2	2060	81.1	922	36.3	6175	243.1	173 D	170 E	6500	14300	2.4	35	975
710/70R42	DW 23B	DW 25B	TL	716	28.2	2060	81.1	922	36.3	6175	243.1	176 D	179 A8	7100	15620	2.8	41	975
710/70R42	DW 23B	DW 25B	TL	716	28.2	2060	81.1	922	36.3	6175	243.1	179 D	182 A8	7750	17050	3.2	46	975



SR-777

STEEL BELTED RADIAL TRACTOR TYRES (R-1W) (70/75 SERIES)

- Enhance strength and stability.
- Resistant to punctures and cuts.
- Distribute the load evenly across the tyres footprint.
- Self cleaning tread design.
- Combination of tread design and special compound, reduces fuel consumption and improves efficiency without scarifying traction or performance.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
200/70R16	W 6	-	TL	198	7.8	686	27.0	312	12.3	2057	81.0	94 A8	94 B	670	1475	2.4	35	330
240/70R16	W 8	W 8L W 9L	TL	241	9.5	742	29.2	335	13.2	2225	87.6	104 A8	104 B	900	1980	2.4	35	350
260/70R16	W 8	W 8L W 9L	TL	258	10.2	770	30.3	345	13.6	2309	90.9	109 A8	109 B	1030	2265	2.4	35	370
280/70R16	W 9	W 8 W 8L W 10	TL	282	11.1	798	31.4	356	14.0	2370	93.3	112 A8	112 B	1120	2465	2.4	35	380
280/70R18	W 9	W 8 W 10	TL	282	11.1	849	33.4	381	15.0	2547	100.3	114 A8	114 B	1180	2595	2.4	35	400
280/70R20	W 9	W 8 W 10	TL	282	11.1	900	35.4	408	16.1	2705	106.5	116 A8	116 B	1250	2750	2.4	35	450
300/70R20	W 9	W 10	TL	295	11.6	952	37.5	428	16.8	2854	112.4	110 A8	107 B	1060	2332	1.6	23	450
300/70R20	W 9	W 10	TL	295	11.6	952	37.5	428	16.8	2854	112.4	120 A8	120 B	1400	3080	2.4	35	450
320/70R20	W 10	W 9 W 11	TL	320	12.6	983	38.7	444	17.5	2964	116.7	123 A8	123 B	1550	3410	2.4	35	475
320/70R20	W 10	W 9 W 11	TL	320	12.6	983	38.7	444	17.5	2964	116.7	130 D	130 A8	1900	4180	3.2	46	475
360/70R20	W 11	W 10 W 12	TL	358	14.1	1041	41.0	470	18.5	3122	122.9	129 A8	129 B	1850	4070	2.4	35	500
380/70R20	W 12	W 11 W 13	TL	380	15.0	1082	42.6	482	19.0	3215	126.6	132 A8	132 B	2000	4400	2.4	35	525
320/70R24	W 10	W 9 W 11	TL	320	12.6	1095	43.1	503	19.8	3240	127.8	116 A8	116 B	1250	2750	1.6	23	525
360/70R24	W 11	W 10 W 11	TL	358	14.1	1153	45.4	518	20.4	3454	136.0	122 A8	119 B	1500	3300	1.6	23	550
360/70R24	W 11	W 10 W 11	TL	358	14.1	1153	45.4	518	20.4	3454	136.0	122 A8	122 B	1500	3300	1.6	23	550
360/70R24	W 11	W 10 W 11	TL	358	14.1	1153	45.4	518	20.4	3454	136.0	133 D	136 A8	2060	4532	3.2	46	550
380/70R24	W 12	W 11 W 13	TL	381	15.0	1191	46.9	538	21.2	3561	140.2	125 A8	125 B	1650	3630	1.6	23	575
380/70R24	W 12	W 11 W 13	TL	381	15.0	1191	46.9	538	21.2	3561	140.2	125 D	128 A8	1650	3630	1.6	23	575
380/70R24	W 12	W 11 W 13	TL	381	15.0	1191	46.9	538	21.2	3561	140.2	125 D	122 E	1650	3630	1.6	23	575
380/70R24	W 12	W 11 W 13	TL	381	15.0	1191	46.9	538	21.2	3561	140.2	130 D	130 A8	1900	4180	2.4	35	575

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
420/70R24	W 13	W 12 W 14L	TL	419	16.5	1222	48.1	579	22.8	3561	144.9	130 A8	127 B	1900	4180	1.6	23	600
420/70R24	W 13	W 12 W 14L	TL	419	16.5	1222	48.1	579	22.8	3561	144.9	130 A8	130 B	1900	4180	1.6	23	600
420/70R24	W 13	W 12 W 14L	TL	419	16.5	1222	48.1	579	22.8	3561	144.9	136 A8	136 B	2240	4928	2.4	35	600
420/70R24	W 13	W 12 W 14L	TL	419	16.5	1222	48.1	579	22.8	3561	144.9	136 D	139 A8	2240	4928	2.4	35	600
750/65R26	DW25B	DW23B DW24B	TL	750	29.5	1636	64.4	737	29.0	4987	196.3	166 A8	166 B	5300	11660	2.4	35	775
750/65R26	DW25B	DW23B DW24B	TL	750	29.5	1636	64.4	737	29.0	4987	196.3	169 B	169 A8	5300	11660	2.8	41	775
750/65R26	DW25B	DW23B DW24B	TL	750	29.5	1636	64.4	737	29.0	4987	196.3	166 D	169 A8	5300	11660	1.6	23	775
750/65R26	DW25B	DW23B DW24B	TL	750	29.5	1636	64.4	737	29.0	4987	196.3	171 A8	171 B	6150	13530	3.2	46	775
360/70R28	W 11	W 10 W 12	TL	360	14.2	1250	49.2	578	22.8	3765	148.2	125 D	128 A8	1650	3630	1.6	23	600
380/70R28	W 12	W 11 W 13	TL	381	15.0	1293	50.9	587	23.1	3884	152.9	127 A8	127 B	1750	3850	1.6	23	625
380/70R28	W 12	W 11 W 13	TL	381	15.0	1293	50.9	587	23.1	3884	152.9	127 D	130 A8	1750	3850	1.6	23	625
380/70R28	W 12	W 11 W 13	TL	381	15.0	1293	50.9	587	23.1	3884	152.9	133 D	136 A8	2060	4532	2.4	35	625
420/70R28	W 13	W 12 W 14L	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	133 A8	133 B	2060	4535	1.6	23	650
420/70R28	W 13	W 12 W 14L	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	133 A8	130 B	2060	4664	1.6	23	650
420/70R28	W 13	W 12 W 14L	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	136 A8	133 B	2240	4928	1.6	23	650
420/70R28	W 13	W 12 W 14L	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	133 D	136 A8	2060	4664	1.6	23	650
420/70R28	W 13	W 12 W 14L	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	133 D	130 E	2060	4664	1.6	23	650
420/70R28	W 13	W 12 W 14L	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	139 D	142 A8	2430	5346	2.4	35	650
480/70R28	W 13	W 15L	TL	480	18.9	1420	55.9	634	25.0	4885	192.3	139 A8	139 B	2500	5500	1.6	23	675
480/70R28	W 15L	W 14L W 16L	TL	480	19.0	1420	55.9	635	25.0	4180	164.6	140 D	143 A8	2500	5500	1.6	23	675
480/70R28	W 15L	W 14L W 16L	TL	480	19.0	1420	55.9	635	25.0	4180	164.6	151 A8	151 B	3450	7590	3.2	46	675
480/70R28	W 13	W 15L	TL	480	18.9	1420	55.9	634	25.0	4885	192.3	151 D	154 A8	3450	7590	3.2	46	675
480/70R30	W 15L	W 14L W 16L	TL	479	19.0	1478	58.2	659	26.0	4372	172.0	141 D	138 E	2575	5665	1.6	23	700
480/70R30	W 15L	W 14L W 16L	TL	479	19.0	1478	58.2	659	26.0	4372	172.0	141 A8	141 B	2575	5665	1.6	23	700
480/70R30	W 15L	W 14L W 16L	TL	479	19.0	1478	58.2	659	26.0	4372	172.0	152 A8	152 B	2965	6523	1.6	23	700
620/75R30	DW 20B	-	TL	622	24.5	1695	66.7	780	30.7	5170	203.5	166 A8	166 B	5300	11660	3.2	46	800
620/75R30	DW 20B	-	TL	622	24.5	1695	66.7	780	30.7	5170	203.5	169 D	172 A8	3450	7590	3.2	46	800

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
400/75R38	W 14	W 14	TL	394	15.5	1570	62.0	730	29.0	4685	184.0	138 A8	138 B	2360	5192	1.6	23	750
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	166 D	169 A8	5300	11660	1.6	23	925
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	166 A8	163 B	5300	11660	1.6	23	925
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	171 D	174 A8	6150	13530	2.4	35	925
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	172 D	175 A8	6300	13860	2.8	41	925
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	172 D	168 E	6300	13860	2.8	41	925
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	175 D	178 A8	6900	15180	2.8	41	925
710/70R38	DW 23B	DW 25B	TL	716	28.2	1958	77.1	859	33.8	5751	226.4	177 D	180 A8	7300	16060	3.2	46	925
710/70R42	DW 23B	DW 25B	TL	716	28.2	2060	81.1	922	36.3	6175	243.1	168 D	171 A8	5600	12320	1.6	23	975
710/70R42	DW 23B	DW 25B	TL	716	28.2	2060	81.1	922	36.3	6175	243.1	173 D	176 A8	6500	14300	2.4	35	975
710/70R42	DW 23B	DW 25B	TL	716	28.2	2060	81.1	922	36.3	6175	243.1	173 D	170 E	6500	14300	2.4	35	975
710/70R42	DW 23B	DW 25B	TL	716	28.2	2060	81.1	922	36.3	6175	243.1	176 D	179 A8	7100	15620	2.8	41	975
710/70R42	DW 23B	DW 25B	TL	716	28.2	2060	81.1	922	36.3	6175	243.1	179 D	182 A8	7750	17050	3.2	46	975



SR-77

RADIAL TRACTOR TYRES (R-1W) (70/75 SERIES)

- Radial tyre with balanced characteristics for wide range of applications both on the field and on the road.
- Larger ground contact patch makes the tyre well suited for handling grassland.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
620/75R26	DW 20B	-	TL	625	24.6	1590	62.6	730	28.7	4852	191.0	166 A8	166 B	5600	12320	3.2	46	750
420/70R30	W 13	W 12 W 14L	TL	418	16.0	1398	55.0	631	25.0	4172	170.0	134 A8	131 B	2120	4664	1.6	23	675
420/70R30	W 13	W 12 W 14L	TL	418	16.0	1398	55.0	631	25.0	4172	170.0	134 D	137 A8	2120	4664	1.6	23	675
600/70R30	DW 20B	DW 18L W 18L	TL	592	23.3	1603	63.1	711	28.0	4775	188.0	152 A8	152 B	3550	7810	1.6	23	750
600/70R30	DW 20B	DW 18L W 18L	TL	592	23.3	1603	63.1	711	28.0	4775	188.0	152 D	155 A8	3550	7810	1.6	23	750
600/70R30	DW 20B	DW 18L W 18L	TL	592	23.3	1603	63.1	711	28.0	4775	188.0	158 D	155 E	4250	9350	2.4	35	750
600/70R30	DW 20B	DW 18L W 18L	TL	592	23.3	1603	63.1	711	28.0	4775	188.0	173 D	170 E	6500	14300	3.8	55	750
600/70R30	DW 20B	DW 18L W 18L	TL	592	23.3	1603	63.1	711	28.0	4775	188.0	168 A8	165 B	5150	11330	3.2	46	750
800/70R32	DW 27B	DW 25B DW 27B	TL	795	31.3	1935	76.2	871	34.3	5725	225.4	181 A8	181 B	8250	18150	3.2	46	900
900/60R32	DW 28B	DW 27B DW 30B	TL	896	35.3	1893	74.5	840	33.1	5695	224.2	176 A8	173 B	7100	15620	2.4	35	900
900/60R32	DW 28B	DW 27B DW 30B	TL	896	35.3	1893	74.5	840	33.1	5695	224.2	181 A8	181 B	8250	18150	3.2	46	900
900/60R32	DW 28B	DW 27B DW 30B	TL	896	35.3	1893	74.5	840	33.1	5695	224.2	185 D	188 A8	9250	20350	4.0	58	900
480/70R34	W 15L	W 13 W 15L	TL	479	19.0	1580	62.0	728	30.0	4788	195.0	143 A8	143 B	2725	5995	1.6	23	750
480/70R34	W 15L	W 13 W 15L	TL	479	19.0	1580	62.0	728	30.0	4788	195.0	143 D	146 A8	2725	5995	1.6	23	750
480/70R34	W 15L	W 13 W 15L	TL	479	19.0	1580	62.0	728	30.0	4788	195.0	143 D	140 E	2725	5995	1.6	23	750
480/70R34	W 15L	W 13 W 15L	TL	479	19.0	1580	62.0	728	30.0	4788	195.0	155 A8	155 B	3875	8525	3.2	46	750
480/70R34	W 15L	W 13 W 15L	TL	479	19.0	1580	62.0	728	30.0	4788	195.0	155 D	158 A8	3875	8525	3.2	46	750
480/70R38	W 15L	W 14L W 16L	TL	479	19.0	1681	66.0	764	31.0	5050	206.0	145 A8	145 B	2900	6380	1.6	23	800
480/70R38	W 15L	W 14L W 16L	TL	479	19.0	1681	66.0	764	31.0	5050	206.0	145 D	148 A8	2900	6380	1.6	23	800
480/70R38	W 15L	W 14L W 16L	TL	479	19.0	1681	66.0	764	31.0	5050	206.0	151 D	154 A8	3450	7590	2.4	35	800

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
520/70R38	W 16L	W 15L W 18L	TL	516	20.0	1749	69.0	793	32.0	5300	216.0	150 D	147 E	3350	7370	1.6	23	825
520/70R38	W 16L	W 15L W 18L	TL	516	20.0	1749	69.0	793	32.0	5300	216.0	150 D	153 A8	3350	7370	1.6	23	825
520/70R38	W 16L	W 15L W 18L	TL	516	20.0	1749	69.0	793	32.0	5300	216.0	155 D	158 A8	3875	8525	2.4	35	825
580/70R38	W 18L	DW 18L	TL	577	23.0	1827	72.0	821	34.0	5471	223.0	155 D	152 E	2135	4697	1.6	23	875
580/70R38	W 18L	DW 18L	TL	577	23.0	1827	72.0	821	34.0	5471	223.0	155 D	158 A8	2135	4697	1.6	23	875
580/70R38	W 18L	DW 18L	TL	577	23.0	1827	72.0	821	34.0	5471	223.0	179 D	182 A8	7750	17050	5.6	81	875
620/70R38	DW 20B	DW 18L W 18L	TL	625	24.6	1833	72.2	828	32.6	5591	220.1	170 D	173 A8	4320	9504	1.6	23	875
580/70R42	W 18L	DW 18L	TL	584	23.0	1908	75.0	864	34.0	5690	224.0	158 D	161 A8	4250	9350	1.6	23	900
620/70R42	DW 20B	DW 18L W 18L	TL	625	24.6	1935	76.2	876	34.5	5805	228.5	160 D	163 A8	4500	9900	1.6	23	925
620/70R42	DW 20B	DW 18L W 18L	TL	625	24.6	1935	76.2	876	34.5	5805	228.5	166 A8	166 B	5300	11660	2.4	35	925
620/70R42	DW 20B	DW 18L W 18L	TL	625	24.6	1935	76.2	876	34.5	5805	228.5	166 D	163 E	5300	11660	2.4	35	925
620/70R42	DW 20B	DW 18L W 18L	TL	625	24.6	1935	76.2	876	34.5	5805	228.5	169 A8	166 B	5800	12760	3.2	46	925
620/70R46	DW 20B	DW 18L W 18L	TL	625	24.6	2036	80.2	924	36.4	6105	240.4	162 D	165 A8	4750	10450	1.6	23	975



SR-77

STEEL BELTED RADIAL TRACTOR TYRES (R-1W) (70/75 SERIES)

- Enhance strength and stability.
- Resistant to punctures and cuts.
- Distribute the load evenly across the tyres footprint.
- Self cleaning tread design.
- Combination of tread design and special compound, reduces fuel consumption and improves efficiency without scarifying traction or performance.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
620/75R26	DW 20B	-	TL	625	24.6	1590	62.6	730	28.7	4852	191.0	166 A8	166 B	5600	12320	3.2	46	750
420/70R30	W 13	W 12 W 14L	TL	418	16.0	1398	55.0	631	25.0	4172	170.0	134 A8	131 B	2120	4664	1.6	23	675
420/70R30	W 13	W 12 W 14L	TL	418	16.0	1398	55.0	631	25.0	4172	170.0	134 D	137 A8	2120	4664	1.6	23	675
600/70R30	DW 20B	DW 18L W 18L	TL	592	23.3	1603	63.1	711	28.0	4775	188.0	152 A8	152 B	3550	7810	1.6	23	750
600/70R30	DW 20B	DW 18L W 18L	TL	592	23.3	1603	63.1	711	28.0	4775	188.0	152 D	155 A8	3550	7810	1.6	23	750
600/70R30	DW 20B	DW 18L W 18L	TL	592	23.3	1603	63.1	711	28.0	4775	188.0	158 D	155 E	4250	9350	2.4	35	750
600/70R30	DW 20B	DW 18L W 18L	TL	592	23.3	1603	63.1	711	28.0	4775	188.0	173 D	170 E	6500	14300	3.8	55	750
600/70R30	DW 20B	DW 18L W 18L	TL	592	23.3	1603	63.1	711	28.0	4775	188.0	168 A8	165 B	5150	11330	3.2	46	750
800/70R32	DW 27B	DW 25B DW 27B	TL	795	31.3	1935	76.2	871	34.3	5725	225.4	181 A8	181 B	8250	18150	3.2	46	900
900/60R32	DW 28B	DW 27B DW 30B	TL	896	35.3	1893	74.5	840	33.1	5695	224.2	176 A8	173 B	7100	15620	2.4	35	900
900/60R32	DW 28B	DW 27B DW 30B	TL	896	35.3	1893	74.5	840	33.1	5695	224.2	181 A8	181 B	8250	18150	3.2	46	900
900/60R32	DW 28B	DW 27B DW 30B	TL	896	35.3	1893	74.5	840	33.1	5695	224.2	185 D	188 A8	9250	20350	4.0	58	900
480/70R34	W 15L	W 13 W 15L	TL	479	19.0	1580	62.0	728	30.0	4788	195.0	143 A8	143 B	2725	5995	1.6	23	750
480/70R34	W 15L	W 13 W 15L	TL	479	19.0	1580	62.0	728	30.0	4788	195.0	143 D	146 A8	2725	5995	1.6	23	750
480/70R34	W 15L	W 13 W 15L	TL	479	19.0	1580	62.0	728	30.0	4788	195.0	143 D	140 E	2725	5995	1.6	23	750
480/70R34	W 15L	W 13 W 15L	TL	479	19.0	1580	62.0	728	30.0	4788	195.0	155 A8	155 B	3875	8525	3.2	46	750
480/70R34	W 15L	W 13 W 15L	TL	479	19.0	1580	62.0	728	30.0	4788	195.0	155 D	158 A8	3875	8525	3.2	46	750
480/70R38	W 15L	W 14L W 16L	TL	479	19.0	1681	66.0	764	31.0	5050	206.0	145 A8	145 B	2900	6380	1.6	23	800
480/70R38	W 15L	W 14L W 16L	TL	479	19.0	1681	66.0	764	31.0	5050	206.0	145 D	148 A8	2900	6380	1.6	23	800
480/70R38	W 15L	W 14L W 16L	TL	479	19.0	1681	66.0	764	31.0	5050	206.0	151 D	154 A8	3450	7590	2.4	35	800

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
520/70R38	W 16L	W 15L W 18L	TL	516	20.0	1749	69.0	793	32.0	5300	216.0	150 D	147 E	3350	7370	1.6	23	825
520/70R38	W 16L	W 15L W 18L	TL	516	20.0	1749	69.0	793	32.0	5300	216.0	150 D	153 A8	3350	7370	1.6	23	825
520/70R38	W 16L	W 15L W 18L	TL	516	20.0	1749	69.0	793	32.0	5300	216.0	155 D	158 A8	3875	8525	2.4	35	825
580/70R38	W 18L	DW 18L	TL	577	23.0	1827	72.0	821	34.0	5471	223.0	155 D	152 E	2135	4697	1.6	23	875
580/70R38	W 18L	DW 18L	TL	577	23.0	1827	72.0	821	34.0	5471	223.0	155 D	158 A8	2135	4697	1.6	23	875
580/70R38	W 18L	DW 18L	TL	577	23.0	1827	72.0	821	34.0	5471	223.0	179 D	182 A8	7750	17050	5.6	81	875
620/70R38	DW 20B	DW 18L W 18L	TL	625	24.6	1833	72.2	828	32.6	5591	220.1	170 D	173 A8	4320	9504	1.6	23	875
580/70R42	W 18L	DW 18L	TL	584	23.0	1908	75.0	864	34.0	5690	224.0	158 D	161 A8	4250	9350	1.6	23	900
620/70R42	DW 20B	DW 18L W 18L	TL	625	24.6	1935	76.2	876	34.5	5805	228.5	160 D	163 A8	4500	9900	1.6	23	925
620/70R42	DW 20B	DW 18L W 18L	TL	625	24.6	1935	76.2	876	34.5	5805	228.5	166 A8	166 B	5300	11660	2.4	35	925
620/70R42	DW 20B	DW 18L W 18L	TL	625	24.6	1935	76.2	876	34.5	5805	228.5	166 D	163 E	5300	11660	2.4	35	925
620/70R42	DW 20B	DW 18L W 18L	TL	625	24.6	1935	76.2	876	34.5	5805	228.5	169 A8	166 B	5800	12760	3.2	46	925
620/70R46	DW 20B	DW 18L W 18L	TL	625	24.6	2036	80.2	924	36.4	6105	240.4	162 D	165 A8	4750	10450	1.6	23	975



SR-888

RADIAL TRACTOR TYRES (R-1W) (80/85 SERIES)

- Radial tyre with balanced characteristics for wide range of applications both on the field and on the road.
- Larger ground contact patch makes the tyre well suited for handling grassland.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
250/85R20 (9.5R20)	W 8	W 7 W 9	TL	249	9.8	940	37.0	424	16.7	2812	110.7	116 A8	116 B	1250	2750	2.4	35	450
280/85R20 (11.2R20)	W 10	DW 10 W 9	TL	292	11.5	983	38.7	442	17.4	2951	116.2	112 A8	112 B	1120	2464	1.6	23	475
250/85R24 (9.5R24)	W 8	W 7 W 9	TL	251	9.9	1036	40.8	475	18.7	3104	122.2	109 A8	109 B	1030	2465	1.6	23	500
250/85R24 (9.5R24)	W 8	W 7 W 9	TL	251	9.9	1036	40.8	475	18.7	3104	122.2	115 D	118 A8	1215	2675	2.4	35	500
280/85R24 (11.2R24)	W 10	W 9	TL	292	11.5	1087	42.8	508	20.0	3226	127.0	115 A8	115 B	1215	2675	1.6	23	525
280/85R24 (11.2R24)	W 10	W 9	TL	292	11.5	1087	42.8	508	20.0	3226	127.0	130 D	133 A8	1900	4180	4.0	58	525
320/85R24 (12.4R24)	W 11	W 9 W 10	TL	330	13.0	1153	45.4	518	20.4	3424	134.8	122 A8	122 B	1500	3300	1.6	23	550
320/85R24 (12.4R24)	W 11	W 9 W 10	TL	330	13.0	1153	45.4	518	20.4	3424	134.8	127 D	130 A8	1750	3850	2.4	35	550
340/85R24 (13.6R24)	W 12	W 11	TL	343	13.5	1188	46.8	533	21.0	3531	139.0	125 A8	125 B	1650	3630	1.6	23	575
340/85R24 (13.6R24)	W 12	W 11	TL	343	13.5	1188	46.8	533	21.0	3531	139.0	130 A8	130 B	1900	4180	2.4	35	575
340/85R24 (13.6R24)	W 12	W 11	TL	343	13.5	1188	46.8	533	21.0	3531	139.0	136 D	136 A8	2240	4928	3.2	46	575
380/85R24 (14.9R24)	W 12	W 11 W 13	TL	381	15.0	1255	49.4	559	22.0	3706	145.9	131 A8	128 B	1950	4290	1.6	23	600
380/85R24 (14.9R24)	W 12	W 11 W 13	TL	381	15.0	1255	49.4	559	22.0	3706	145.9	131 A8	131 B	1950	4290	1.6	23	600
380/85R24 (14.9R24)	W 12	W 11 W 13	TL	381	15.0	1255	49.4	559	22.0	3706	145.9	137 D	140 A8	1950	4290	2.4	35	600
250/85R28 (9.5R28)	W 8	W 7 W 9	TL	251	9.9	1138	44.8	518	20.4	3321	134.7	112 A8	112 B	1120	2465	1.6	23	550
280/85R28 (11.2R28)	W 10	W 9	TL	292	11.5	1186	46.7	546	21.5	3559	140.1	118 A8	118 B	1320	2904	1.6	23	575
280/85R28 (11.2R28)	W 10	W 9	TL	292	11.5	1186	46.7	546	21.5	3559	140.1	123 D	126 A8	1550	3410	2.4	35	575
320/85R28 (12.4R28)	W 11	W 9 W 10	TL	320	12.6	1255	49.4	559	22.0	3734	147.0	124 A8	124 B	1600	3520	1.6	23	600
320/85R28 (12.4R28)	W 11	W 9 W 10	TL	320	12.6	1255	49.4	559	22.0	3734	147.0	129 D	132 A8	1850	4070	2.4	35	600
340/85R28 (13.6R28)	W 12	W 11	TL	353	13.9	1288	50.7	584	23.0	3835	151.0	127 A8	127 B	1750	3850	1.6	23	625

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
340/85R28 (13.6R28)	W 12	W 11	TL	353	13.9	1288	50.7	584	23.0	3835	151.0	133 D	136 A8	2060	4535	2.4	35	625
380/85R28 (14.9R28)	W 12	W 11 W 13	TL	381	15.0	1356	53.4	607	23.9	4016	158.1	133 A8	130 E	2060	4535	1.6	23	650
380/85R28 (14.9R28)	W 12	W 11 W 13	TL	381	15.0	1356	53.4	607	23.9	4016	158.1	133 A8	133 B	2060	4535	1.6	23	650
380/85R28 (14.9R28)	W 12	W 11 W 13	TL	381	15.0	1356	53.4	607	23.9	4016	158.1	139 A8	139 B	2430	5345	2.4	35	650
380/85R28 (14.9R28)	W 12	W 11 W 13	TL	381	15.0	1356	53.4	607	23.9	4016	158.1	139 D	142 A8	2430	5345	2.4	35	650
420/85R28 (16.9R28)	W 15	W 13 W 14L	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	139 A8	136 B	2430	5345	1.6	23	675
420/85R28 (16.9R28)	W 15	W 13 W 14L	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	139 A8	139 B	2430	5345	1.6	23	675
420/85R28 (16.9R28)	W 15	W 13 W 14L	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	139 D	136 E	2430	5345	1.6	23	675
420/85R28 (16.9R28)	W 15	W 13 W 14L	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	144 A8	144 B	2800	6160	2.4	35	675
420/85R28 (16.9R28)	W 15	W 13 W 14L DW 14L	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	144 D	147 A8	2800	6160	2.4	35	675
380/85R30 (14.9R30)	W 12	W 11 W 13	TL	381	15.0	1407	55.4	630	24.8	4153	163.5	135 A8	132 B	2180	4795	1.6	23	675
380/85R30 (14.9R30)	W 12	W 11 W 13	TL	381	15.0	1407	55.4	630	24.8	4153	163.5	135 A8	135 B	2180	4795	1.6	23	675
380/85R30 (14.9R30)	W 12	W 11 W 13	TL	381	15.0	1407	55.4	630	24.8	4153	163.5	135 D	132 E	2180	4795	1.6	23	675
380/85R30 (14.9R30)	W 12	W 11 W 13	TL	381	15.0	1407	55.4	630	24.8	4153	163.5	140 D	143 A8	2500	5500	2.4	35	675
420/85R30 (16.9R30)	W 15	W 13 W 14	TL	419	16.5	1476	58.1	660	26.0	4394	173.0	140 A8	137 B	2500	5500	1.6	23	700
420/85R30 (16.9R30)	W 15	W 13 W 14	TL	419	16.5	1476	58.1	660	26.0	4394	173.0	140 A8	140 B	2500	5500	1.6	23	700
420/85R30 (16.9R30)	W 15	W 13 W 14	TL	419	16.5	1476	58.1	660	26.0	4394	173.0	140 D	137 E	2500	5500	2.4	35	700
420/85R30 (16.9R30)	W 15	W 13 W 14	TL	419	16.5	1476	58.1	660	26.0	4394	173.0	145 D	148 A8	2900	6380	2.4	35	700
460/85R30 (18.4R30)	W 16 L	W 14L W 15L	TL	475	18.7	1544	60.8	683	26.9	4536	178.6	145 A8	145 B	2900	6380	1.6	23	725
460/85R30 (18.4R30)	W 16 L	W 14L W 15L	TL	475	18.7	1544	60.8	683	26.9	4536	178.6	150 D	153 A8	3350	7370	2.4	35	725
380/85R34 (14.9R34)	W 12	W 11 W 13	TL	381	15.0	1514	59.6	686	27.0	4470	176.0	137 A8	137 B	2300	5060	1.6	23	725
380/85R34 (14.9R34)	W 12	W 11 W 13	TL	381	15.0	1514	59.6	686	27.0	4470	176.0	142 A8	142 B	2650	5830	2.4	35	725
380/85R34 (14.9R34)	W 12	W 11 W 13	TL	381	15.0	1514	59.6	686	27.0	4470	176.0	142 D	145 A8	2650	5830	2.4	35	725
420/85R34 (16.9R34)	W 15L	W 13 W 14	TL	419	16.5	1577	62.1	711	28.0	4674	184.0	142 A8	139 B	2650	5830	1.6	23	750
420/85R34 (16.9R34)	W 15L	W 13 W 14	TL	419	16.5	1577	62.1	711	28.0	4674	184.0	142 A8	142 B	2650	5830	1.6	23	750
420/85R34 (16.9R34)	W 15L	W 13 W 14	TL	419	16.5	1577	62.1	711	28.0	4674	184.0	147 A8	147 B	3075	6765	2.4	35	750
420/85R34 (16.9R34)	W 15L	W 13 W 14	TL	419	16.5	1577	62.1	711	28.0	4674	184.0	147 D	150 A8	3075	6765	2.4	35	750

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
460/85R34 (18.4R34)	DW 15L	W 14L W 15L DW 16L	TL	475	18.7	1646	64.8	737	29.0	4851	191.0	147 A8	144 B	3075	6765	1.6	23	775
460/85R34 (18.4R34)	W 16	W 14 W 15	TL	475	18.7	1646	64.8	737	29.0	4851	191.0	152 A8	152 B	3550	7810	2.4	35	775
460/85R34 (18.4R34)	W 16	W 14 W 15	TL	475	18.7	1646	64.8	737	29.0	4851	191.0	158 D	161 A8	4250	9350	3.2	46	775
320/85R36 (12.4R36)	W 11	W 9 W 10	TL	329	13.0	1458	57.4	672	26.5	4404	173.4	147 D	150 A8	1810	3982	1.6	23	700
340/85R36 (13.6R36)	W 12	W 11	TL	353	13.9	1492	58.7	689	27.1	4507	177.4	132 A8	132 B	2000	4400	1.6	23	725
340/85R38 (13.6R38)	W 12	W 11	TL	353	13.9	1543	60.7	712	28.0	4668	183.8	133 A8	130 B	2060	4532	1.6	23	750
340/85R38 (13.6R38)	W 12	W 11	TL	353	13.9	1543	60.7	712	28.0	4668	183.8	133 A8	133 B	2060	4532	1.6	23	750
340/85R38 (13.6R38)	W 12	W 11	TL	353	13.9	1543	60.7	712	28.0	4668	183.8	133 D	130 E	2060	4532	1.6	23	750
340/85R38 (13.6R38)	W 12	W 11	TL	353	13.9	1543	60.7	712	28.0	4668	183.8	148 D	151 A8	3150	6930	4.0	58	750
420/85R38 (16.9R38)	W 15L	W 13 W 14L	TL	419	16.5	1680	66.1	762	30.0	5004	197.0	144 A8	141 B	2800	6160	1.6	23	800
420/85R38 (16.9R38)	W 15L	W 13 W 14L	TL	419	16.5	1680	66.1	762	30.0	5004	197.0	144 A8	144 B	2800	6160	1.6	23	800
420/85R38 (16.9R38)	W 15L	W 13 W 14L	TL	419	16.5	1680	66.1	762	30.0	5004	197.0	149 A8	149 B	3250	7150	2.4	35	800
420/85R38 (16.9R38)	W 15L	W 13 W 14L	TL	419	16.5	1680	66.1	762	30.0	5004	197.0	149 D	152 A8	3250	7150	2.4	35	800
460/85R38 (18.4R38)	DW 15L	W 14L DW 16L	TL	455	17.9	1748	68.8	787	31.0	5156	203.0	149 A8	146 B	3250	7150	1.6	23	825
460/85R38 (18.4R38)	DW 15L	W 14 W 15	TL	455	17.9	1748	68.8	787	31.0	5156	203.0	149 D	146 E	3250	7150	1.6	23	825
460/85R38 (18.4R38)	DW 15L	W 14 W 15	TL	455	17.9	1748	68.8	787	31.0	5156	203.0	154 A8	154 B	3750	8250	2.4	35	825
460/85R38 (18.4R38)	DW 15L	W 14 W 15	TL	455	17.9	1748	68.8	787	31.0	5156	203.0	154 D	157 A8	3750	8250	2.4	35	825
520/85R38 (20.8R38)	DW 16	DW 15L DW 18L	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	155 A8	152 B	3875	8525	1.6	23	875
520/85R38 (20.8R38)	DW 16	DW 15L DW 18L	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	155 A8	155 B	3875	8525	1.6	23	875
520/85R38 (20.8R38)	DW 16	DW 15L DW 18L	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	155 D	152 E	3875	8525	1.6	23	875
520/85R38 (20.8R38)	DW 16	DW 15L DW 18L	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	160 A8	160 B	4500	9900	2.4	35	875
520/85R38 (20.8R38)	DW 16	DW 15L DW 18L	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	169 D	172 A8	5800	12760	3.6	52	875
650/85R38	DW 23B	DW 20B DW 21B	TL	670	26.4	2070	81.5	935	36.8	6184	243.5	173 A8	173 B	6500	14300	2.4	35	975
650/85R38	DW 23B	DW 20B DW 21B	TL	670	26.4	2070	81.5	935	36.8	6184	243.5	173 D	170 E	6500	14300	2.4	35	975
650/85R38	DW 23B	DW 20B DW 21B	TL	670	26.4	2070	81.5	935	36.8	6184	243.5	173 D	176 A8	6500	14300	2.4	35	975
480/80R42 (18.4R42)	DW 16L	DW 14L DW 15L DW 16L	TL	480	18.9	1836	72.3	838	33.0	5461	215.0	151 A8	151 B	3450	7590	1.6	23	875
480/80R42 (18.4R42)	DW 16L	DW 14L DW 15L DW 16L	TL	480	18.9	1836	72.3	838	33.0	5461	215.0	156 A8	156 B	4000	8800	2.4	35	875

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
520/85R42 (20.8R42)	DW 16L	DW 15L DW 18L	TL	516	20.3	1951	76.8	859	33.8	5735	225.8	157 A8	157 B	4125	9075	1.6	23	925
520/85R42 (20.8R42)	DW 16L	DW 15L DW 18L	TL	516	20.3	1951	76.8	859	33.8	5735	225.8	157 D	154 E	4125	9075	1.6	23	925
520/85R42 (20.8R42)	DW 16L	DW 15L DW 18L	TL	516	20.3	1951	76.8	859	33.8	5735	225.8	162 A8	162 B	4750	10450	2.4	35	925
520/85R42 (20.8R42)	DW 16L	DW 15L DW 18L	TL	516	20.3	1951	76.8	859	33.8	5735	225.8	162 D	165 A8	4750	10450	2.4	35	925
520/85R42 (20.8R42)	DW 16L	DW 15L DW 18L	TL	516	20.3	1951	76.8	859	33.8	5735	225.8	165 A8	165 B	4750	10450	2.8	41	925
650/85R42	UNDER DEVELOPMENT																	
480/80R46 (18.4R46)	W 16	DW 16	TL	480	18.9	1935	76.2	889	35.0	5791	228.0	158A8	158 B	4250	9350	2.4	35	925
520/85R46	DW 16L	DW 15L DW 18L	TL	518	20.4	2055	80.9	948	37.3	6139	241.7	158 A8	158 B	4250	9350	1.6	23	975
520/85R46	DW 16L	DW 15L DW 18L	TL	518	20.4	2055	80.9	948	37.3	6139	241.7	158 D	161 A8	4250	9350	1.6	23	975
520/85R46	DW 16L	DW 15L DW 18L	TL	518	20.4	2055	80.9	948	37.3	6139	241.7	164 A8	164 B	5000	11000	2.4	35	975
520/85R46	DW 16L	DW 15L DW 18L	TL	518	20.4	2055	80.9	948	37.3	6139	241.7	169 A8	169 B	5800	12760	3.2	46	975
340/85R48 (13.6R48)	W 12	W 11 DW 12	TL	353	13.9	1798	70.8	838	33.0	5385	212.0	152 A8	152 B	3550	7810	4.0	58	875
480/80R50	DW 16L	DW 14L DW 15L	TL	489	19.3	2035	80.2	940	37.0	6180	243.3	159 A8	159 B	4375	9625	2.4	35	975
480/80R50	DW 16L	DW 14L DW 15L	TL	489	19.3	2035	80.2	940	37.0	6180	243.3	159 D	162 A8	4375	9625	2.4	35	975



SR-888

STEEL BELTED RADIAL TRACTOR TYRES (R-1W) (80/85 SERIES)

- Enhance strength and stability.
- Resistant to punctures and cuts.
- Distribute the load evenly across the tyres footprint.
- Self cleaning tread design.
- Combination of tread design and special compound, reduces fuel consumption and improves efficiency without scarifying traction or performance.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
250/85R20 (9.5R20)	W 8	W 7 W 9	TL	249	9.8	940	37.0	424	16.7	2812	110.7	116 A8	116 B	1250	2750	2.4	35	450
280/85R20 (11.2R20)	W 10	DW 10 W 9	TL	292	11.5	983	38.7	442	17.4	2951	116.2	112 A8	112 B	1120	2464	1.6	23	475
250/85R24 (9.5R24)	W 8	W 7 W 9	TL	251	9.9	1036	40.8	475	18.7	3104	122.2	109 A8	109 B	1030	2465	1.6	23	500
250/85R24 (9.5R24)	W 8	W 7 W 9	TL	251	9.9	1036	40.8	475	18.7	3104	122.2	115 D	118 A8	1215	2675	2.4	35	500
280/85R24 (11.2R24)	W 10	W 9	TL	292	11.5	1087	42.8	508	20.0	3226	127.0	115 A8	115 B	1215	2675	1.6	23	525
280/85R24 (11.2R24)	W 10	W 9	TL	292	11.5	1087	42.8	508	20.0	3226	127.0	130 D	133 A8	1900	4180	4.0	58	525
320/85R24 (12.4R24)	W 11	W 9 W 10	TL	330	13.0	1153	45.4	518	20.4	3424	134.8	122 A8	122 B	1500	3300	1.6	23	550
320/85R24 (12.4R24)	W 11	W 9 W 10	TL	330	13.0	1153	45.4	518	20.4	3424	134.8	127 D	130 A8	1750	3850	2.4	35	550
340/85R24 (13.6R24)	W 12	W 11	TL	343	13.5	1188	46.8	533	21.0	3531	139.0	125 A8	125 B	1650	3630	1.6	23	575
340/85R24 (13.6R24)	W 12	W 11	TL	343	13.5	1188	46.8	533	21.0	3531	139.0	130 A8	130 B	1900	4180	2.4	35	575
340/85R24 (13.6R24)	W 12	W 11	TL	343	13.5	1188	46.8	533	21.0	3531	139.0	136 D	136 A8	2240	4928	3.2	46	575
380/85R24 (14.9R24)	W 12	W 11 W 13	TL	381	15.0	1255	49.4	559	22.0	3706	145.9	131 A8	128 B	1950	4290	1.6	23	600
380/85R24 (14.9R24)	W 12	W 11 W 13	TL	381	15.0	1255	49.4	559	22.0	3706	145.9	131 A8	131 B	1950	4290	1.6	23	600
380/85R24 (14.9R24)	W 12	W 11 W 13	TL	381	15.0	1255	49.4	559	22.0	3706	145.9	137 D	140 A8	1950	4290	2.4	35	600
250/85R28 (9.5R28)	W 8	W 7 W 9	TL	251	9.9	1138	44.8	518	20.4	3321	134.7	112 A8	112 B	1120	2465	1.6	23	550
280/85R28 (11.2R28)	W 10	W 9	TL	292	11.5	1186	46.7	546	21.5	3559	140.1	118 A8	118 B	1320	2904	1.6	23	575
280/85R28 (11.2R28)	W 10	W 9	TL	292	11.5	1186	46.7	546	21.5	3559	140.1	123 D	126 A8	1550	3410	2.4	35	575
320/85R28 (12.4R28)	W 11	W 9 W 10	TL	320	12.6	1255	49.4	559	22.0	3734	147.0	124 A8	124 B	1600	3520	1.6	23	600
320/85R28 (12.4R28)	W 11	W 9 W 10	TL	320	12.6	1255	49.4	559	22.0	3734	147.0	129 D	132 A8	1850	4070	2.4	35	600
340/85R28 (13.6R28)	W 12	W 11	TL	353	13.9	1288	50.7	584	23.0	3835	151.0	127 A8	127 B	1750	3850	1.6	23	625

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
340/85R28 (13.6R28)	W 12	W 11	TL	353	13.9	1288	50.7	584	23.0	3835	151.0	133 D	136 A8	2060	4535	2.4	35	625
380/85R28 (14.9R28)	W 12	W 11 W 13	TL	381	15.0	1356	53.4	607	23.9	4016	158.1	133 A8	130 E	2060	4535	1.6	23	650
380/85R28 (14.9R28)	W 12	W 11 W 13	TL	381	15.0	1356	53.4	607	23.9	4016	158.1	133 A8	133 B	2060	4535	1.6	23	650
380/85R28 (14.9R28)	W 12	W 11 W 13	TL	381	15.0	1356	53.4	607	23.9	4016	158.1	139 A8	139 B	2430	5345	2.4	35	650
380/85R28 (14.9R28)	W 12	W 11 W 13	TL	381	15.0	1356	53.4	607	23.9	4016	158.1	139 D	142 A8	2430	5345	2.4	35	650
420/85R28 (16.9R28)	W 15	W 13 W 14L	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	139 A8	136 B	2430	5345	1.6	23	675
420/85R28 (16.9R28)	W 15	W 13 W 14L	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	139 A8	139 B	2430	5345	1.6	23	675
420/85R28 (16.9R28)	W 15	W 13 W 14L	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	139 D	136 E	2430	5345	1.6	23	675
420/85R28 (16.9R28)	W 15	W 13 W 14L	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	144 A8	144 B	2800	6160	2.4	35	675
420/85R28 (16.9R28)	W 15	W 13 W 14L DW 14L	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	144 D	147 A8	2800	6160	2.4	35	675
380/85R30 (14.9R30)	W 12	W 11 W 13	TL	381	15.0	1407	55.4	630	24.8	4153	163.5	135 A8	132 B	2180	4795	1.6	23	675
380/85R30 (14.9R30)	W 12	W 11 W 13	TL	381	15.0	1407	55.4	630	24.8	4153	163.5	135 A8	135 B	2180	4795	1.6	23	675
380/85R30 (14.9R30)	W 12	W 11 W 13	TL	381	15.0	1407	55.4	630	24.8	4153	163.5	135 D	132 E	2180	4795	1.6	23	675
380/85R30 (14.9R30)	W 12	W 11 W 13	TL	381	15.0	1407	55.4	630	24.8	4153	163.5	140 D	143 A8	2500	5500	2.4	35	675
420/85R30 (16.9R30)	W 15	W 13 W 14	TL	419	16.5	1476	58.1	660	26.0	4394	173.0	140 A8	137 B	2500	5500	1.6	23	700
420/85R30 (16.9R30)	W 15	W 13 W 14	TL	419	16.5	1476	58.1	660	26.0	4394	173.0	140 A8	140 B	2500	5500	1.6	23	700
420/85R30 (16.9R30)	W 15	W 13 W 14	TL	419	16.5	1476	58.1	660	26.0	4394	173.0	140 D	137 E	2500	5500	2.4	35	700
420/85R30 (16.9R30)	W 15	W 13 W 14	TL	419	16.5	1476	58.1	660	26.0	4394	173.0	145 D	148 A8	2900	6380	2.4	35	700
460/85R30 (18.4R30)	W 16 L	W 14L W 15L	TL	475	18.7	1544	60.8	683	26.9	4536	178.6	145 A8	145 B	2900	6380	1.6	23	725
460/85R30 (18.4R30)	W 16 L	W 14L W 15L	TL	475	18.7	1544	60.8	683	26.9	4536	178.6	150 D	153 A8	3350	7370	2.4	35	725
380/85R34 (14.9R34)	W 12	W 11 W 13	TL	381	15.0	1514	59.6	686	27.0	4470	176.0	137 A8	137 B	2300	5060	1.6	23	725
380/85R34 (14.9R34)	W 12	W 11 W 13	TL	381	15.0	1514	59.6	686	27.0	4470	176.0	142 A8	142 B	2650	5830	2.4	35	725
380/85R34 (14.9R34)	W 12	W 11 W 13	TL	381	15.0	1514	59.6	686	27.0	4470	176.0	142 D	145 A8	2650	5830	2.4	35	725
420/85R34 (16.9R34)	W 15L	W 13 W 14	TL	419	16.5	1577	62.1	711	28.0	4674	184.0	142 A8	139 B	2650	5830	1.6	23	750
420/85R34 (16.9R34)	W 15L	W 13 W 14	TL	419	16.5	1577	62.1	711	28.0	4674	184.0	142 A8	142 B	2650	5830	1.6	23	750
420/85R34 (16.9R34)	W 15L	W 13 W 14	TL	419	16.5	1577	62.1	711	28.0	4674	184.0	147 A8	147 B	3075	6765	2.4	35	750
420/85R34 (16.9R34)	W 15L	W 13 W 14	TL	419	16.5	1577	62.1	711	28.0	4674	184.0	147 D	150 A8	3075	6765	2.4	35	750

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
460/85R34 (18.4R34)	DW 15L	W 14L W 15L DW 16L	TL	475	18.7	1646	64.8	737	29.0	4851	191.0	147 A8	144 B	3075	6765	1.6	23	775
460/85R34 (18.4R34)	W 16	W 14 W 15	TL	475	18.7	1646	64.8	737	29.0	4851	191.0	152 A8	152 B	3550	7810	2.4	35	775
460/85R34 (18.4R34)	W 16	W 14 W 15	TL	475	18.7	1646	64.8	737	29.0	4851	191.0	158 D	161 A8	4250	9350	3.2	46	775
320/85R36 (12.4R36)	W 11	W 9 W 10	TL	329	13.0	1458	57.4	672	26.5	4404	173.4	147 D	150 A8	1810	3982	1.6	23	700
340/85R36 (13.6R36)	W 12	W 11	TL	353	13.9	1492	58.7	689	27.1	4507	177.4	132 A8	132 B	2000	4400	1.6	23	725
340/85R38 (13.6R38)	W 12	W 11	TL	353	13.9	1543	60.7	712	28.0	4668	183.8	133 A8	130 B	2060	4532	1.6	23	750
340/85R38 (13.6R38)	W 12	W 11	TL	353	13.9	1543	60.7	712	28.0	4668	183.8	133 A8	133 B	2060	4532	1.6	23	750
340/85R38 (13.6R38)	W 12	W 11	TL	353	13.9	1543	60.7	712	28.0	4668	183.8	133 D	130 E	2060	4532	1.6	23	750
340/85R38 (13.6R38)	W 12	W 11	TL	353	13.9	1543	60.7	712	28.0	4668	183.8	148 D	151 A8	3150	6930	4.0	58	750
420/85R38 (16.9R38)	W 15L	W 13 W 14L	TL	419	16.5	1680	66.1	762	30.0	5004	197.0	144 A8	141 B	2800	6160	1.6	23	800
420/85R38 (16.9R38)	W 15L	W 13 W 14L	TL	419	16.5	1680	66.1	762	30.0	5004	197.0	144 A8	144 B	2800	6160	1.6	23	800
420/85R38 (16.9R38)	W 15L	W 13 W 14L	TL	419	16.5	1680	66.1	762	30.0	5004	197.0	149 A8	149 B	3250	7150	2.4	35	800
420/85R38 (16.9R38)	W 15L	W 13 W 14L	TL	419	16.5	1680	66.1	762	30.0	5004	197.0	149 D	152 A8	3250	7150	2.4	35	800
460/85R38 (18.4R38)	DW 15L	W 14L DW 16L	TL	455	17.9	1748	68.8	787	31.0	5156	203.0	149 A8	146 B	3250	7150	1.6	23	825
460/85R38 (18.4R38)	DW 15L	W 14 W 15	TL	455	17.9	1748	68.8	787	31.0	5156	203.0	149 D	146 E	3250	7150	1.6	23	825
460/85R38 (18.4R38)	DW 15L	W 14 W 15	TL	455	17.9	1748	68.8	787	31.0	5156	203.0	154 A8	154 B	3750	8250	2.4	35	825
460/85R38 (18.4R38)	DW 15L	W 14 W 15	TL	455	17.9	1748	68.8	787	31.0	5156	203.0	154 D	157 A8	3750	8250	2.4	35	825
520/85R38 (20.8R38)	DW 16	DW 15L DW 18L	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	155 A8	152 B	3875	8525	1.6	23	875
520/85R38 (20.8R38)	DW 16	DW 15L DW 18L	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	155 A8	155 B	3875	8525	1.6	23	875
520/85R38 (20.8R38)	DW 16	DW 15L DW 18L	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	155 D	152 E	3875	8525	1.6	23	875
520/85R38 (20.8R38)	DW 16	DW 15L DW 18L	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	160 A8	160 B	4500	9900	2.4	35	875
520/85R38 (20.8R38)	DW 16	DW 15L DW 18L	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	169 D	172 A8	5800	12760	3.6	52	875
650/85R38	DW 23B	DW 20B DW 21B	TL	670	26.4	2070	81.5	935	36.8	6184	243.5	173 A8	173 B	6500	14300	2.4	35	975
650/85R38	DW 23B	DW 20B DW 21B	TL	670	26.4	2070	81.5	935	36.8	6184	243.5	173 D	170 E	6500	14300	2.4	35	975
650/85R38	DW 23B	DW 20B DW 21B	TL	670	26.4	2070	81.5	935	36.8	6184	243.5	173 D	176 A8	6500	14300	2.4	35	975
480/80R42 (18.4R42)	DW 16L	DW 14L DW 15L DW 16L	TL	480	18.9	1836	72.3	838	33.0	5461	215.0	151 A8	151 B	3450	7590	1.6	23	875
480/80R42 (18.4R42)	DW 16L	DW 14L DW 15L DW 16L	TL	480	18.9	1836	72.3	838	33.0	5461	215.0	156 A8	156 B	4000	8800	2.4	35	875

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
520/85R42 (20.8R42)	DW 16L	DW 15L DW 18L	TL	516	20.3	1951	76.8	859	33.8	5735	225.8	157 A8	157 B	4125	9075	1.6	23	925
520/85R42 (20.8R42)	DW 16L	DW 15L DW 18L	TL	516	20.3	1951	76.8	859	33.8	5735	225.8	157 D	154 E	4125	9075	1.6	23	925
520/85R42 (20.8R42)	DW 16L	DW 15L DW 18L	TL	516	20.3	1951	76.8	859	33.8	5735	225.8	162 A8	162 B	4750	10450	2.4	35	925
520/85R42 (20.8R42)	DW 16L	DW 15L DW 18L	TL	516	20.3	1951	76.8	859	33.8	5735	225.8	162 D	165 A8	4750	10450	2.4	35	925
520/85R42 (20.8R42)	DW 16L	DW 15L DW 18L	TL	516	20.3	1951	76.8	859	33.8	5735	225.8	165 A8	165 B	4750	10450	2.8	41	925
650/85R42	UNDER DEVELOPMENT																	
480/80R46 (18.4R46)	W 16	DW 16	TL	480	18.9	1935	76.2	889	35.0	5791	228.0	158A8	158 B	4250	9350	2.4	35	925
520/85R46	DW 16L	DW 15L DW 18L	TL	518	20.4	2055	80.9	948	37.3	6139	241.7	158 A8	158 B	4250	9350	1.6	23	975
520/85R46	DW 16L	DW 15L DW 18L	TL	518	20.4	2055	80.9	948	37.3	6139	241.7	158 D	161 A8	4250	9350	1.6	23	975
520/85R46	DW 16L	DW 15L DW 18L	TL	518	20.4	2055	80.9	948	37.3	6139	241.7	164 A8	164 B	5000	11000	2.4	35	975
520/85R46	DW 16L	DW 15L DW 18L	TL	518	20.4	2055	80.9	948	37.3	6139	241.7	169 A8	169 B	5800	12760	3.2	46	975
340/85R48 (13.6R48)	W 12	W 11 DW 12	TL	353	13.9	1798	70.8	838	33.0	5385	212.0	152 A8	152 B	3550	7810	4.0	58	875
480/80R50	DW 16L	DW 14L DW 15L	TL	489	19.3	2035	80.2	940	37.0	6180	243.3	159 A8	159 B	4375	9625	2.4	35	975
480/80R50	DW 16L	DW 14L DW 15L	TL	489	19.3	2035	80.2	940	37.0	6180	243.3	159 D	162 A8	4375	9625	2.4	35	975



RC-99

RADIAL TRACTOR TYRES (R-1W) (90/95 SERIES)

- Round shoulders minimize influence on the crop roots.
- Optimum lug shape and angle provide an excellent grip.
- Long service life thanks to the use of a wear resistant tread compound.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
270/95R36	W 9	W 8 W 10	TL	275	10.8	1428	56.2	665	26.2	4336	170.7	139 D	142 A8	2430	5346	4.0	58	700
270/95R54	W 9	W 8 W 10	TL	275	10.8	1885	74.2	894	35.2	5815	228.9	156 D	159 A8	4000	8800	5.6	81	925



RC-99

STEEL BELTED RADIAL TRACTOR TYRES (R-1W) (90/95 SERIES)

- Self cleaning tread design.
- Round shoulders minimize influence on the crop roots.
- Optimum lug shape and angle provide an excellent grip.
- Long service life thanks to the use of a wear resistant tread compound.
- Cut and puncture resistant.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
270/95R36	W 9	W 8 W 10	TL	275	10.8	1428	56.2	665	26.2	4336	170.7	139 D	142 A8	2430	5346	4.0	58	700
270/95R54	W 9	W 8 W 10	TL	275	10.8	1885	74.2	894	35.2	5815	228.9	156 D	159 A8	4000	8800	5.6	81	925



RC-999

RADIAL TRACTOR TYRES (R-1W) (90/95 SERIES)

- Round shoulders minimize influence on the crop roots.
- Optimum lug shape and angle provide an excellent grip.
- Long service life thanks to the use of a wear resistant tread compound.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
210/95R16 (7.50R16)	W 7	W 6	TL	208	8.2	805	31.7	361	14.2	2416	95.1	106 A8	106 B	950	2090	2.4	35	380
210/95R18 (7.50R18)	W 7	W 6	TL	214	8.4	856	33.7	386	15.2	2565	101.0	108 A8	108 B	1000	2200	2.4	35	410
210/90R20 (8.3R20)	W 7	W 6	TL	211	8.3	889	35.0	411	16.2	2682	105.6	110 A8	110 B	1060	2332	2.4	35	425
210/95R20 (7.5R20)	W 7	W 6	TL	214	8.4	907	35.7	419	16.5	2748	108.2	110 A8	110 B	1060	2332	2.4	35	450
210/95R32 (8.3R32)	W 7	W 6	TL	214	8.4	1213	47.8	559	22.0	3658	144.0	120 A8	120 B	1400	3080	3.2	46	600
230/95R32 (9.5R32)	W 7	W 6	TL	229	9.0	1251	49.3	584	23.0	3759	148.0	128 A8	128 B	1800	3960	4.0	58	600
270/95R32 (11.2R32)	W 9	W 8 W 10	TL	275	10.8	1327	52.2	609	24.0	4039	159.0	136 A8	136 B	2240	4928	4.0	58	650
230/95R36 (9.5R36)	W 7	W 8	TL	229	9.0	1352	53.2	609	24.0	4064	160.0	130 A8	130 B	1900	4180	4.0	58	650
270/95R36 (11.2R-36)	W 9	W 8 W 10	TL	229	9.0	1425	56.1	663	26.1	4359	171.6	139 A8	139 B	2430	5346	4.0	58	700
270/95R38 (11.2R38)	W 9	W 8 W 10	TL	275	10.8	1479	58.2	686	27.0	4445	175.0	140 A8	140 B	2500	5500	4.0	58	725
230/95R44 (9.5R44)	W 7	W 8	TL	228	9.0	1556	61.3	737	29.0	4699	185.0	134 A8	134 B	2120	4664	4.0	58	750
270/95R44 (11.2R44)	W 9	W 8 W 10	TL	275	10.8	1632	64.3	762	30.0	4902	193.0	142 A8	142 B	2650	5830	4.0	58	800
300/95R46 (12.4R46)	W 9	W 10 W 11	TL	300	11.8	1737	68.3	813	32.0	5207	205.0	148 A8	148 B	3150	6930	4.0	58	850
380/90R46 (14.9R46)	W 12	W 11 W 13	TL	380	15.0	1852	72.9	866	34.1	5648	222.4	155 A8	155 B	3295	7249	2.4	35	900
380/90R46 (14.9R46)	W 12	W 11 W 13	TL	380	15.0	1852	72.9	866	34.1	5648	222.4	159 D	162 A8	4375	9625	4.0	58	900
380/90R46 (14.9R46)	W 12	W 11 W 13	TL	380	15.0	1852	72.9	866	34.1	5648	222.4	172 D	175 A8	6300	13860	5.8	84	900
230/95R48 (9.5R48)	W 7	W 8	TL	228	9.0	1657	65.2	787	30.1	4978	196.0	136 A8	136 B	2240	4928	4.0	58	800
270/95R48 (11.2R48)	W 9	W 8 W 10	TL	275	10.8	1733	68.2	812	32.0	5257	207.0	144 A8	144 B	2800	6160	4.0	58	850
300/95R52 (12.4R52)	W 9	W 10 W 11	TL	305	12.1	1892	75.0	889	35.0	5664	223.0	151 A8	151 B	3450	7590	4.0	58	925
300/95R52 (12.4R52)	W 9	W 10 W 11	TL	300	11.8	1892	75.0	889	35.0	5664	223.0	156 D	159 A8	4000	8800	4.8	70	925



RC-999

STEEL BELTED RADIAL TRACTOR TYRES (R-1W) (90/95 SERIES)

- Self cleaning tread design.
- Round shoulders minimize influence on the crop roots.
- Optimum lug shape and angle provide an excellent grip.
- Long service life thanks to the use of a wear resistant tread compound.
- Cut and puncture resistant.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
210/95R16 (7.50R16)	W 7	W 6	TL	208	8.2	805	31.7	361	14.2	2416	95.1	106 A8	106 B	950	2090	2.4	35	380
210/95R18 (7.50R18)	W 7	W 6	TL	214	8.4	856	33.7	386	15.2	2565	101.0	108 A8	108 B	1000	2200	2.4	35	410
210/90R20 (8.3R20)	W 7	W 6	TL	211	8.3	889	35.0	411	16.2	2682	105.6	110 A8	110 B	1060	2332	2.4	35	425
210/95R20 (7.5R20)	W 7	W 6	TL	214	8.4	907	35.7	419	16.5	2748	108.2	110 A8	110 B	1060	2332	2.4	35	450
210/95R32 (8.3R32)	W 7	W 6	TL	214	8.4	1213	47.8	559	22.0	3658	144.0	120 A8	120 B	1400	3080	3.2	46	600
230/95R32 (9.5R32)	W 7	W 6	TL	229	9.0	1251	49.3	584	23.0	3759	148.0	128 A8	128 B	1800	3960	4.0	58	600
270/95R32 (11.2R32)	W 9	W 8 W 10	TL	275	10.8	1327	52.2	609	24.0	4039	159.0	136 A8	136 B	2240	4928	4.0	58	650
230/95R36 (9.5R36)	W 7	W 8	TL	229	9.0	1352	53.2	609	24.0	4064	160.0	130 A8	130 B	1900	4180	4.0	58	650
270/95R36 (11.2R36)	W 9	W 8 W 10	TL	229	9.0	1425	56.1	663	26.1	4359	171.6	139 A8	139 B	2430	5346	4.0	58	700
270/95R38 (11.2R38)	W 9	W 8 W 10	TL	275	10.8	1479	58.2	686	27.0	4445	175.0	140 A8	140 B	2500	5500	4.0	58	725
230/95R44 (9.5R44)	W 7	W 8	TL	228	9.0	1556	61.3	737	29.0	4699	185.0	134 A8	134 B	2120	4664	4.0	58	750
270/95R44 (11.2R44)	W 9	W 8 W 10	TL	275	10.8	1632	64.3	762	30.0	4902	193.0	142 A8	142 B	2650	5830	4.0	58	800
300/95R46 (12.4R46)	W 9	W 10 W 11	TL	300	11.8	1737	68.3	813	32.0	5207	205.0	148 A8	148 B	3150	6930	4.0	58	850
380/90R46 (14.9R46)	W 12	W 11 W 13	TL	380	15.0	1852	72.9	866	34.1	5648	222.4	155 A8	155 B	3295	7249	2.4	35	900
380/90R46 (14.9R46)	W 12	W 11 W 13	TL	380	15.0	1852	72.9	866	34.1	5648	222.4	159 D	162 A8	4375	9625	4.0	58	900
380/90R46 (14.9R46)	W 12	W 11 W 13	TL	380	15.0	1852	72.9	866	34.1	5648	222.4	172 D	175 A8	6300	13860	5.8	84	900
230/95R48 (9.5R48)	W 7	W 8	TL	228	9.0	1657	65.2	787	30.1	4978	196.0	136 A8	136 B	2240	4928	4.0	58	800
270/95R48 (11.2R48)	W 9	W 8 W 10	TL	275	10.8	1733	68.2	812	32.0	5257	207.0	144 A8	144 B	2800	6160	4.0	58	850
300/95R52 (12.4R52)	W 9	W 10 W 11	TL	305	12.1	1892	75.0	889	35.0	5664	223.0	151 A8	151 B	3450	7590	4.0	58	925
300/95R52 (12.4R52)	W 9	W 10 W 11	TL	300	11.8	1892	75.0	889	35.0	5664	223.0	156 D	159 A8	4000	8800	4.8	70	925



SR-65

RADIAL HARVESTER TYRES

- Suitable for all kinds of Harvesting Machines.
- Design to deliver power to the ground.
- Extra deep tread.
- Low soil compaction and excellent traction in the field.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
750/65R26 (28L R26)	DW 25B	DW 23B DW 24B	TL	765	30.1	1636	64.4	714	28.1	4907	193.2	166 A8	166 B	5300	11660	2.4	35	775
750/65R26 (28L R26)	DW 25B	DW 23B DW 24B	TL	765	30.1	1636	64.4	714	28.1	4907	193.2	169 A8	169 B	6150	13530	2.8	41	775
750/65R26 (28L R26)	DW 25B	DW 23B DW 24B	TL	765	30.1	1636	64.4	714	28.1	4907	193.2	166 D	169 A8	5300	11660	2.4	35	775
750/65R26 (28L R26)	DW 25B	DW 23B DW 24B	TL	765	30.1	1636	64.4	714	28.1	4907	193.2	171 A8	171 B	6150	13530	3.2	46	775
800/65R32 (30.5L R32)	DW 27B	DW 25B DH 27B	TL	818	32.2	1855	73.2	838	33.0	5588	220.0	167 A8	167 B	5450	11990	1.6	23	875
800/65R32 (30.5L R32)	DW 27B	DW 25B DH 27B	TL	818	32.2	1855	73.2	838	33.0	5588	220.0	172 A8	172 B	6300	13860	2.4	35	875
800/65R32 (30.5L R32)	DW 27B	DW 25B DH 27B	TL	818	32.2	1855	73.2	838	33.0	5588	220.0	178 A8	178 B	7500	16500	3.2	46	875
800/65R32 (30.5L R32)	DW 27B	DW 25B DH 27B	TL	818	32.2	1855	73.2	838	33.0	5588	220.0	181 A8	178 B	8250	18150	3.6	52	875



SR-777

RADIAL HARVESTER TYRES

- Suitable for all kinds of Harvesting Machines.
- Design to deliver power to the ground.
- Extra deep tread.
- Low soil compaction and excellent traction in the field.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
620/75R26 (23.1R26)	DW 20B	-	TL	625	24.6	1590	62.6	729	28.7	4851	191.0	166 A8	166 B	5300	11660	3.2	46	750
620/75R-30 (23.1R30)	DW 20B	-	TL	625	24.6	1710	65.3	780	30.7	5170	203.5	169 A8	169 B	5800	12760	3.2	46	800



SR-65

STEEL BELTED RADIAL HARVESTER TYRES

- Suitable for all kinds of Harvesting Machines.
- Design to deliver power to the ground.
- Extra deep tread.
- Low soil compaction and excellent traction in the field.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
750/65R26 (28L R26)	DW 25B	DW 23B DW 24B	TL	765	30.1	1636	64.4	714	28.1	4907	193.2	166 A8	166 B	5300	11660	2.4	35	775
750/65R26 (28L R26)	DW 25B	DW 23B DW 24B	TL	765	30.1	1636	64.4	714	28.1	4907	193.2	169 A8	169 B	6150	13530	2.8	41	775
750/65R26 (28L R26)	DW 25B	DW 23B DW 24B	TL	765	30.1	1636	64.4	714	28.1	4907	193.2	166 D	169 A8	5300	11660	2.4	35	775
750/65R26 (28L R26)	DW 25B	DW 23B DW 24B	TL	765	30.1	1636	64.4	714	28.1	4907	193.2	171 A8	171 B	6150	13530	3.2	46	775
800/65R32 (30.5L R32)	DW 27B	DW 25B DH 27B	TL	818	32.2	1855	73.2	838	33.0	5588	220.0	167 A8	167 B	5450	11990	1.6	23	875
800/65R32 (30.5L R32)	DW 27B	DW 25B DH 27B	TL	818	32.2	1855	73.2	838	33.0	5588	220.0	172 A8	172 B	6300	13860	2.4	35	875
800/65R32 (30.5L R32)	DW 27B	DW 25B DH 27B	TL	818	32.2	1855	73.2	838	33.0	5588	220.0	178 A8	178 B	7500	16500	3.2	46	875
800/65R32 (30.5L R32)	DW 27B	DW 25B DH 27B	TL	818	32.2	1855	73.2	838	33.0	5588	220.0	181 A8	178 B	8250	18150	3.6	52	875



SR-777

STEEL BELTED RADIAL HARVESTER TYRES

- Cut and puncture resistant.
- Suitable for all kinds of Harvesting Machines.
- Design to deliver power to the ground.
- Extra deep tread.
- Low soil compaction and excellent traction in the field.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
620/75R26 (23.1R26)	DW 20B	-	TL	625	24.6	1590	62.6	729	28.7	4851	191.0	166 A8	166 B	5300	11660	3.2	46	750
620/75R30 (23.1R30)	DW 20B	-	TL	625	24.6	1710	65.3	780	30.7	5170	203.5	169 A8	169 B	5800	12760	3.2	46	800



FR-60

RADIAL FLOTATION TYRES

- Flotation Radial Tyres provides soil protection.
- Non directional lugs pattern enables mobility in the field.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
560/60R22.5	AG 20	17 18	TL	560	22.0	1245	49.0	560	22.0	3700	145.7	161 D	172 A8	4625	10175	4.0	58	600
560/60R22.5	AG 20	17 18	TL	560	22.0	1245	49.0	560	22.0	3700	145.7	165 D	168 A8	5150	11330	5.0	72	600
600/50R22.5	AG 20	-	TL	600	23.6	1171	46.1	532	20.9	3592	141.4	159 D	170 A8	4375	9625	4.0	58	550
600/50R22.5	AG 20	-	TL	600	23.6	1171	46.1	532	20.9	3592	141.4	163 D	166 A8	4875	10725	5.0	72	550
600/55R26.5	AG 20	-	TL	612	24.1	1333	52.5	591	23.3	4092	161.1	165 D	176 A8	5150	11330	4.0	58	625
600/55R26.5	AG 20	-	TL	612	24.1	1333	52.5	591	23.3	4092	161.1	173 D	176 A8	6500	14300	6.0	87	625
710/50R26.5	AG 20	AG 24	TL	727	28.6	1385	54.5	599	23.6	4210	165.7	170 D	181 A8	6000	13200	4.0	58	650
710/50R26.5	AG 20	AG 24	TL	727	28.6	1385	54.5	599	23.6	4210	165.7	179 D	182 A8	7750	17050	6.0	87	650



SB-60

STEEL BELTED RADIAL FLOTATION TYRES*

- Enhance strength and stability.
- Flotation Radial Tyres provides soil protection.
- Non directional lugs pattern enables mobility in the field.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.
- Cut and puncture resistant.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
500/60R22.5	AG 15	16 17	TL	503	20.0	1171	46.0	531	21.0	3576	141.0	155 D	158 A8	3875	8525	4.0	58	550
600/55R22.5	AG 20	-	TL	595	23.0	1232	49.0	560	22.0	3758	148.0	162 D	165 A8	4326	9517	4.0	58	575
650/55R22.5	AG 20	-	TL	645	25.0	1287	51.0	568	22.0	3901	154.0	167 D	170 A8	5450	11990	4.0	58	600
620/50R22.5	AG 20	-	TL	600	24.0	1170	46.0	520	20.0	3601	142.0	161 D	164 A8	4625	10175	4.0	58	575
550/45R22.5	AG 16	15 16 17	TL	550	22.0	1070	52.0	489	19.0	3275	129.0	154 D	157 A8	3450	7590	4.0	58	525
560/45R22.5	AG 16	18	TL	543	21.0	1076	42.0	491	19.0	3306	130.0	160 D	163 A8	4500	9900	4.0	58	525
710/45R22.5	AG 24	AG 20	TL	706	28.0	1212	48.0	542	21.0	3658	144.0	165 D	168 A8	5150	11330	4.0	58	575
650/55R26.5	AG 20	-	TL	644	25.0	1389	55.0	619	24.0	4200	165.0	169 D	172 A8	5800	12760	4.0	58	650
710/50R26.5	AG 24	AG 20	TL	727	29.0	1383	54.0	624	25.0	4217	166.0	170 D	173 A8	6000	13200	4.0	58	650
750/45R26.5	AG 24	AG 20	TL	754	30.0	1349	53.0	606	24.0	4147	163.0	170 D	173 A8	6000	13200	4.0	58	650
800/45R26.5	AG 24	AG 28	TL	828	33.0	1392	55.0	618	24.0	4239	167.0	174D	177 A8	6700	14740	4.0	58	675
750/60R30.5	AG 24	-	TL	754	30.0	1675	66.0	747	29.0	5092	200.0	181 D	184 A8	8250	18150	4.0	58	800
710/50R30.5	AG 24	AG 20	TL	727	29.0	1485	58.0	676	27.0	4533	178.0	173 D	176 A8	6500	14300	4.0	58	700
800/45R30.5	AG 28	-	TL	790	31.0	1495	59.0	670	26.0	4594	181.0	176 D	179 A8	7165	15763	4.0	58	725

* Under Development



IMP-03

RADIAL IMPLEMENT TYRES

- Multipurpose use for on and off the road.
- Suitable to carry heavy load, thanks to its strong casing.
- Reduce soil compaction.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
		Inch		mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
260/70R15.3	9.0	-	TL	264	10.4	760	30.0	344	13.6	2304	90.7	2120	4664	6.0	87	134	A8/40	A8/25



IMP-03

STEEL BELTED RADIAL IMPLEMENT TYRES

- Multipurpose use for on and off the road.
- Suitable to carry heavy load, thanks to its strong casing.
- Cut and puncture resistant.
- Steel belt ensure enhanced durability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
		Inch		mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
260/70R15.3	9.0	-	TL	264	10.4	760	30.0	344	13.6	2304	90.7	2120	4664	6.0	87	134	A8/40	A8/25



FL-60

RADIAL IMPLEMENT TYRES

- Multipurpose use for on and off the road.
- Suitable to carry heavy load, thanks to its strong casing.
- Reduce soil compaction.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
425/55R17	13.0	-	TL	420	16.6	894	35.2	397	15.6	2704	106.5	1850	4070	4.0	58	140	D/65	D/40
500/50R17	16.0	-	TL	503	19.8	932	36.7	424	16.7	2913	114.7	3000	6600	5.0	73	149	D/65	D/40



FL-60

STEEL BELTED RADIAL IMPLEMENT TYRES

- Multipurpose use for on and off the road.
- Suitable to carry heavy load, thanks to its strong casing.
- Cut and puncture resistant.
- Steel belt ensure enhanced durability.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
425/55R17	13.0	-	TL	420	16.6	894	35.2	397	15.6	2704	106.5	1850	4070	4.0	58	140	D/65	D/40
500/50R17	16.0	-	TL	503	19.8	932	36.7	424	16.7	2913	114.7	3000	6600	5.0	73	149	D/65	D/40



RADIAL AGRI ND-5

RADIAL IRRIGATION TYRES

- Wider and stronger tread with durable sidewall.
- Low air pressure ensures less compaction.
- Wider profile for better flotation and foot.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
270/95R38	W 9	W 8 W 10	TL	275	10.8	1479	58.2	697	27.4	4510	177.6	140 A8	140 B	1550	3410	1.6	23	725



Agriculture ***Bias Tyres***





GRIPKING

BIAS TRACTOR REAR TYRES (R-1)

- Specially designed for better traction, self cleaning and stability.
- Ideally suitable in all operating conditions.
- Superior tread.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
8.00-20	8	7.0	TT	229	9.0	965	38.0	457	18.0	2845	112.0	920	2024	2.1	30	105	A6/30	A6/20
8.3-20	8	7.0	TT	211	8.3	900	35.4	406	16.0	2704	106.5	825	1808	2.5	35	101	A6/30	A6/20
9.5-20	8	7.0	TT	241	9.5	955	37.6	432	17.0	2942	115.8	975	2145	2.8	41	107	A6/30	A6/20
11.2-20	8	10.0	TT	284	11.2	998	39.7	483	19.0	2997	118.0	1090	2398	2.4	35	111	A6/30	A6/20
	12											1215	2675	2.8	40	115	A6/30	A6/20
8.3-22	6	7.0	TT	211	8.3	950	37.4	457	18.0	2972	117.0	800	1760	2.8	41	100	A6/30	A6/20
	8	7.0	TT	241	9.5	991	39.3	457	18.0	2972	117.0	900	1980	3.1	45	104	A6/30	A6/20
9.5-22	6	7.0	TT	241	9.5	991	39.3	457	18.0	2972	117.0	900	1980	2.2	32	104	A6/30	A6/20
	8											1060	2335	2.9	42	110	A6/30	A6/20
8.3-24	6	7.0	TT	211	8.3	993	39.1	457	18.0	2921	115.0	800	1760	2.4	35	100	A6/30	A6/20
	8											925	2035	3.1	45	105	A6/30	A6/20
9.5-24	8	7.0	TT	241	9.5	1050	41.3	483	19.0	3099	122.0	1120	2464	2.9	41	112	A6/30	A6/20
	12											1360	2990	3.8	55	119	A6/30	A6/20
11.2-24	8	10.0	TT	284	11.2	1105	43.5	508	20.0	3251	128.0	1250	2750	2.4	35	116	A6/30	A6/20
	12											1360	3000	2.8	41	119	A6/30	A6/20
	16											1650	3630	3.0	44	125	A2/10	A2/6
12.4-24	8	11.0	TT	315	12.4	1170	46.0	533	21.0	3404	134.0	1450	3190	2.3	33	121	A6/30	A6/20
	12											1800	3960	3.5	50	128	A6/30	A6/20
13.6-24	8	12.0	TT	345	13.5	1210	47.6	559	22.0	3556	140.0	1550	3410	1.9	28	123	A6/30	A6/20
	12											1900	4180	2.8	41	130	A6/30	A6/20
14.9-24	8	13.0	TT	378	14.9	1265	49.8	584	23.0	3708	146.0	1800	3960	1.8	26	128	A6/30	A6/20
	12											2180	4795	2.6	37	135	A6/30	A6/20
21.3-24	12	18.0	TT/TL	540	21.3	1400	55.1	644	25.3	4221	166.1	3860	8492	2.2	32	155	A8/40	A8/25
	16											4500	9900	2.8	40	160	A8/40	A8/25
13.6-26	8	12.0	TT	345	13.6	1260	49.6	584	23.0	3708	146.0	1700	3740	2.1	31	126	A6/30	A6/20
	12											2180	4796	3.4	50	135	A6/30	A6/20
14.9-26	8	13.0	TT	378	14.9	1315	51.7	610	24.0	3861	152.0	1850	4070	1.8	26	129	A6/30	A6/20
	12											2240	4928	2.6	38	136	A6/30	A6/20
23.1-26	12	20.0	TT/TL	587	23.1	1585	62.4	720	28.3	4806	189.2	3650	8030	1.7	25	153	A6/30	A6/20
	16											4375	9625	2.3	33	159	A6/30	A6/20
	18											4625	10175	2.6	38	161	A6/30	A6/20
11.2-28	8	10.0	TT	284	11.2	1205	47.4	559	22.0	3531	139.0	1320	2904	2.4	34	118	A6/30	A6/20
	12											1450	3190	2.5	36	121	A6/30	A6/20
12.4-28	8	11.0	TT	378	14.9	1265	49.8	584	23.0	3708	146.0	1550	3410	2.3	33	123	A6/30	A6/20
	12											1950	4290	3.4	50	131	A6/30	A6/20
13.6-28	8	12.0	TT	378	14.9	1320	52.0	584	23.0	3861	152.0	1650	3630	2.0	29	125	A6/30	A6/20
	12											2120	4664	2.9	41	134	A6/30	A6/20
14.9-28	8	13.0	TT	378	14.9	1365	53.7	635	25.0	4175	164.4	1900	4180	1.8	26	130	A6/30	A6/20
	12											2300	5070	2.6	38	137	A6/30	A6/20
16.9-28	8	15.0	TT	429	16.9	1435	56.5	660	26.0	4216	166.0	2180	4796	1.8	25	135	A6/30	A6/20
	12											2725	5995	2.4	35	143	A6/30	A6/20

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
16.9-30	8	15.0	TT	429	16.9	1486	58.5	680	26.8	4540	178.7	2300	5060	1.7	24	137	A6/30	A6/20
	14											3000	6600	2.8	41	143	A6/30	A6/20
18.4-30	8	16.0	TT	467	18.4	1550	61.0	700	28.0	4698	185.0	2430	5345	1.4	20	139	A6/30	A6/20
	12											3250	7150	2.3	33	149	A6/30	A6/20
	14											3450	7590	2.6	38	151	A6/30	A6/20
12.4-32	8	11.0	TT	325	12.8	1359	53.5	635	25.0	3988	157.0	1600	3520	2.3	33	124	A6/30	A6/20
16.9-34	8	15.0	TT	430	16.9	1590	62.6	728	28.7	4790	188.6	2430	5346	1.7	25	139	A6/30	A6/20
	14											3000	6600	2.8	41	146	A6/30	A6/20
18.4-34	8	16.0	TT	467	18.4	1655	65.2	755	29.7	5000	196.8	2650	5830	1.4	20	142	A6/30	A6/20
	12											3000	6600	2.2	32	146	A6/30	A6/20
	14											3750	8250	2.4	35	154	A6/30	A6/20
	16											4625	8250	2.5	36	161	A2/10	A2/6
20.8-34	14	18.0	TT	528	20.8	1760	69.2	790	31.1	5156	203.0	3250	7150	1.4	20	149	A6/30	A6/20
	18											3650	8030	1.8	26	153	A6/30	A6/20
12.4-36	8	11.0	TT	325	13.0	1465	58.0	696	28.0	4546	186.0	1700	3740	2.3	33	126	A6/30	A6/20
	12											2120	4664	2.8	41	134	A6/30	A6/20
13.6-36	8	12.0	TT	345	13.6	1515	59.6	717	28.2	4454	175.3	1850	4070	2.0	29	129	A6/30	A6/20
	12											2300	5060	2.5	36	137	A6/30	A6/20
12.4-38	8	11.0	TT	320	12.6	1520	59.8	716	28.2	4496	177.0	1750	3850	2.3	33	127	A6/30	A6/20
	12											2120	4664	2.8	40	134	A6/30	A6/20
13.6-38	8	12.0	TT	345	13.6	1565	61.6	737	29.0	4832	190.2	1950	4290	2.0	28	131	A6/30	A6/20
	12											2430	5360	3.0	44	139	A6/30	A6/20
	14											2650	5830	3.5	51	142	A6/30	A6/20
14.00-38	8	12.0	TT	355	14.0	1570	61.8	737	29.0	4832	190.2	1950	4290	2.0	28	131	A6/30	A6/20
	12											2430	5346	3.0	44	139	A6/30	A6/20
14.9-38	8	13.0	TT	378	15.0	1685	66.3	737	29.0	4597	181.0	2120	4664	2.4	35	134	A6/30	A6/20
	12											2575	5665	3.0	43	141	A6/30	A6/20
15.5-38	8	14.0	TT	395	15.5	1585	62.4	745	29.3	4648	183.0	2060	4532	1.8	26	133	A6/30	A6/20
	12											2575	5665	2.8	41	141	A6/30	A6/20
16.9-38	8	15.0	TT	429	16.9	1685	66.3	787	31.0	4953	195.0	2575	5665	1.8	26	141	A6/30	A6/20
	14											3450	7590	2.4	35	151	A6/30	A6/20
18.4-38	8	16.0	TT	467	18.4	1770	69.6	813	32.0	5156	203.0	2725	5995	1.4	20	143	A6/30	A6/20
	12											3450	7590	2.1	30	151	A6/30	A6/20
	14											3650	8030	2.3	33	153	A6/30	A6/20
20.8-38	12	18.0	TT	528	20.8	1840	72.4	845	33.3	5684	223.8	4000	8800	2.0	29	156	A6/30	A6/20
	14											4500	9900	2.4	35	160	A6/30	A6/20
	18											5300	11660	3.2	46	166	A6/30	A6/20
	28											5800	12760	4.3	62	169	A6/30	A6/20



PK-318 HD

BIAS TRACTOR REAR TYRES (R-1)

- Unique lug design ensures excellent traction in both dry and wet soil conditions.
- Specially designed profile for better stability.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
16.9-26	10	14.0	TT/TL	429	16.9	1385	54.5	635	25.0	4064	160.0	2300	5060	2.3	33	137	A8/40	A8/25
	12											2500	5500	2.3	33		140	A6/30



GRIPKING HD

BIAS TRACTOR REAR TYRES (R-1)

- Deep tread and excellent tread wear and durability.
- Designed to deliver power to the ground.
- Design offers maximum cleaning and sidewall slip resistance.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
12.4-24	8	11.0	TT	315	12.4	1170	46.0	533	21.0	3404	134.0	1450	3190	2.3	33	121	A6/30	A6/20
	12											1800	3960	3.5	50		128	A6/30
14.9-24	8	13.0	TT	378	14.9	1265	49.8	584	23.0	3708	146.0	1800	3960	1.8	26	128	A6/30	A6/20
	12											2180	4795	2.6	37		135	A6/30
15.5/80-24	12	13.0	TL	394	15.5	1260	49.6	584	23.0	3708	146.0	2900	6380	3.0	43	145	A6/30	A6/20
	16											3450	7590	4.0	58		151	A6/30



PK-319

BIAS TRACTOR REAR TYRES (R-1)

- Ensures improved traction in all working conditions.
- Cut and chip resistant tread compound.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
18.4-26	12	16.0	TT/TL	467	18.4	1465	57.6	635	25.0	4216	166.0	3000	6600	2.3	33	146	A6/30	A6/20
	16											3650	8030	3.0	44		153	A6/30



FIELDKING

BIAS TRACTOR REAR TYRES (R-1)

- Multi angled lugs for better traction and self cleaning.
- Cut resistant tread compound for longer type life.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
12.4-28	12	11.0	TT	315	12.4	1270	50.0	584	23.0	3708	146.0	1950	4290	3.1	44	131	A6/30	A6/20
13.6-28	12	12.0	TT	345	13.6	1330	52.4	584	23.0	3861	152.0	2060	4532	2.4	34	133	A6/30	A6/20
14.9-28	12	13.0	TT	378	14.9	1365	53.7	635	25.0	4013	158.0	2300	5060	2.6	37	137	A6/30	A6/20
16.9-28	12	15.0	TT	429	16.9	1435	56.5	660	26.0	4216	166.0	2725	5995	2.4	34	143	A6/30	A6/20
	14											3000	6600	2.6	38		146	A6/30
	16											3250	7150	3.0	44	146	A6/30	A6/20



TR-21

BIAS TRACTOR REAR TYRES (R-1)

- Deeper tread suitable for soil tillage operations.
- Excellent self cleaning properties.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
16.9-30	8	15.0	TT	429	16.9	1486	58.5	686	27.0	4369	172.0	2300	5070	2.1	30	137	A6/30	A6/20
	12											2725	5995	2.5	36	143	A6/30	A6/20
	14											3000	6600	2.8	40	146	A6/30	A6/20
18.4-30	8	16.0	TT	467	18.4	1544	60.8	711	28.0	4851	191.0	2436	5359	1.4	20	139	A6/30	A6/20
	14											3250	7150	2.3	33	149	A6/30	A6/20



KAPTAAN

BIAS TRACTOR REAR TYRES (R-1)

- Deeper tread suitable for soil tillage operations.
- Excellent self cleaning properties.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
13.6-28	8	12	TT	345	13.6	1310	51.6	584	23.0	3861	152.0	1650	5070	2.0	29	125	A6/30	A6/20
	10											1750	2300	2.2	32	127	A6/30	A6/20
	12											1800	2300	2.3	33	128	A6/30	A6/20
14.9-28	10	12	TT	378	14.8	1365	53.7	635	25.0	4013	158.0	2000	4400	2.1	30	128	A6/30	A6/20
	12											2120	4664	2.3	33	128	A6/30	A6/20
	14											2680	5896	3.0	44	142	A6/30	A6/20
16.9-28	10	W15L	TT	429	14.8	1435	53.7	660	26.0	4216	166.0	2430	5346	2.0	29	139	A6/30	A6/20
	12											2725	5995	2.4	35	143	A6/30	A6/20
	14											3000	6600	2.6	37	146	A6/30	A6/20



POWERLUG R-1

BIAS TRACTOR REAR TYRES (R-1)

- Deeper tread suitable for soil tillage operations.
- Excellent self cleaning properties.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
6.00-16	8 12	4.5	TT	155	6.1	745	29.3	356	14.0	2184	86.0	875	1929	4.0	58	103	A6/30	A6/20

UNDER DEVELOPMENT



POWERLUG

BIAS TRACTOR REAR TYRES (R-1)

- Broader lug design and strong casing.
- Better soil penetration and self cleaning.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
12.4-28	12	11.0	TT	315	12.4	1270	50.0	584	23.0	3708	146.0	1950	4290	3.1	44	131	A6/30	A6/20
13.6-28	12	12.0	TT	345	13.6	1330	52.4	584	23.0	3861	152.0	2120	4664	2.4	34	133	A6/30	A6/20
18.4-30	10	16.0	TT	467	18.4	1544	60.8	711	28.0	4851	191.0	2900	6380	1.8	26	145	A6/30	A6/20
	3450											7590	2.6	38	151	A6/30	A6/20	



GRIPKING

HARVESTER TYRES

- Specially designed for harvesting applications.
- Provides excellent traction and self cleaning properties.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
23.1-26	12	20.0	TT/TL	587	23.1	1585	62.4	720	28.3	4806	189.2	3650	8030	1.7	25	153	A6/30	A6/20
	16											4375	9625	2.3	33	159	A6/30	A6/20
	18											4625	10175	2.6	38	161	A6/30	A6/20
23.1-30	12	20.0	TT/TL	600	24.0	1700	67.0	773	32.0	5217	213.0	3875	8525	1.7	25	155	A6/30	A6/20
	16											4625	10175	2.6	38	161	A6/30	A6/20
	18											5000	11000	2.6	38	164	A6/30	A6/20



PK-319 HD

HARVESTER TYRES

- Suitable for all kinds of Harvesting Machines.
- Design to deliver power to the ground.
- Extra deep tread.
- Low soil compaction and excellent traction in the field.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
18.4-26	12	16.0	TT/TL	467	18.4	1465	57.6	635	25.0	4216	166.0	3000	6600	2.3	33	146	A6/30	A6/20
	16											3650	8030	3.0	44	153	A6/30	A6/20
24.5-32	12	21.0	TT/TL	622	24.5	1806	71.1	808	31.8	5340	210.4	4375	9625	1.7	25	159	A6/30	A6/20
	14											4875	10725	2.0	29	163	A6/30	A6/20
	16											5000	11000	2.4	34	164	A6/30	A6/20
30.5L-32	14	27.0	TT/TL	770	30.3	1864	73.4	831	32.7	5519	217.3	5000	11000	1.6	23	164	A6/30	A6/20
	16											5450	11990	1.8	26	167	A6/30	A6/20
	18											5800	12760	2.0	29	169	A6/30	A6/20



TR-2

DRIVE WHEEL TYRES (R-2)

- Extra deep tread specially designed to get excellent traction on wet and sticky soil with excellent self cleaning properties, preventing mud clogging between lugs.
- Tough tread compound to resist extreme conditions.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
12.4-24	8	11.0	TT	315	12.4	1195	47.0	550	21.7	3722	146.5	1450	3190	2.3	33	121	A6/30	A6/20
	12											1800	3960	2.8	40	128	A6/30	A6/20
14.9-24	8	13.0	TT	380	15.0	1310	51.6	595	23.4	4044	159.2	1800	3960	1.8	26	128	A6/30	A6/20
	12											2180	4795	2.3	33	135	A6/30	A6/20
23.1-26	UNDER DEVELOPMENT																	
12.4-28	12	W11	TT	325	12.8	1385	54.52	649	26.0	4067	160.1	1030	2266	3.5	51	109	A6/30	A6/20
13.6-28	8	12.0	TT	350	13.8	1325	52.2	615	24.2	4015	158.1	1650	3630	2.0	30	125	A6/30	A6/20
	12											2120	4664	3.0	44	134	A6/30	A6/20
14.9-28	8	13.0	TT	388	15.0	1380	54.0	642	25.0	4176	164.0	1900	4180	1.8	26	130	A6/30	A6/20
	12											2300	5060	2.6	38	137	A6/30	A6/20
16.9-30	12	W15L	TT	430	17.0	1530	60.2	706	28.0	4000	157.5	2725	5995	2.4	35	143	A6/30	A6/20
18.4-30	8	16.0	TT	465	18.3	1580	62.2	711	28.0	4724	186.0	2430	5345	1.4	20	139	A6/30	A6/20
	12											3250	7150	2.3	33	149	A6/30	A6/20
	14											3450	7590	2.6	38	151	A6/30	A6/20
23.1-30	UNDER DEVELOPMENT																	
18.4-34	8	16.0	TT	465	18.3	1682	66.2	762	30.0	5029	198.0	2650	5830	1.4	20	142	A6/30	A6/20
	12											3450	7590	2.2	32	151	A6/30	A6/20
	14											3550	7810	2.6	38	152	A6/30	A6/20



F-2

BIAS TRACTOR FRONT TYRES

- Penetrates deep into soil for maximum steering control and minimal lateral side-slip because of its high center rib.
- Best for handling heavy loads on hard-packed surfaces.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
3.50-6	4	2.5	TT	99	3.9	343	13.5	214	8.4	1341	52.8	165	363	2.7	38	45	A8/40	A8/25
3.50-8	4	2.5	TT	101	4.0	371	14.6	218	8.6	1390	54.7	185	407	2.7	38	49	A8/40	A8/25
4.00-8	4	3.0	TT	112	4.4	430	16.9	224	8.8	1430	56.3	224	493	2.8	40	56	A8/40	A8/25
4.00-12	4 6	3.0	TT	112	4.4	530	20.8	254	10.0	1626	64.0	300 345	660 759	2.8 3.1	40 45	66 71	A8/40 A6/30	A8/25 A6/20
4.00-15	4	3.0	TT	112	4.4	610	24.0	295	11.6	1854	73.0	307	675	2.8	40	67	A8/40	A8/25
5.00-15	6	4.0	TT	140	5.5	655	25.8	305	12.0	1956	77.0	475	1045	3.7	54	82	A8/40	A8/25
4.00-16	4	3.0	TT	112	4.4	640	25.2	305	12.0	1956	77.0	325	715	3.3	48	69	A6/30	A6/20
4.50-16	4 6	3.0	TT	122	4.8	665	26.2	305	12.0	1956	77.0	335 365	737 803	3.0 3.2	43 47	70 73	A6/30 A6/30	A6/20 A6/20
5.00-16	6	4.0	TT	140	5.5	680	26.8	330	13.0	2032	80.0	400	880	3.3	48	76	A8/40	A8/25
5.50-16	6	4.0	TT	150	5.9	710	27.9	330	13.0	2083	82.0	425	935	3.3	48	78	A8/40	A8/25
6.00-16	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	670	1474	4.4	64	94	A6/30	A6/20
6.50-16	8	4.5	TT	175	6.8	760	29.9	356	14.0	2286	90.0	750	1650	3.3	48	98	A6/30	A6/20
7.50-16	8 12	5.5 5.5	TT/TL TT	205	8.0	808	31.8	381	15.0	2413	95.0	875 1150	1925 2530	3.7 4.7	54 68	103 113	A6/30 A8/40	A6/20 A8/25
9.00-16	10	7.0	TT/TL	234	9.2	854	33.6	406	16.0	2540	100.0	1250	2750	3.8	55	116	A6/30	A6/20
10.00-16	10	7.0	TT/TL	275	10.8	900	35.4	406	16.0	2692	106.0	1360	2992	2.8	41	119	A8/40	A8/25
11.00-16	12	10	TT/TL	320	12.6	970	38.1	457	18.0	2896	114.0	1600	3520	2.5	36	124	A8/40	A8/25
7.50-18	8 12	5.5	TT	204	8.0	867	34.2	406	16.0	2565	101.0	950 1350	2090 2970	3.7 3.9	54 57	106 119	A8/40 A8/40	A8/25 A8/25
4.00-19	6	3.0	TT	112	4.4	712	28.0	330	13.0	2134	84.0	355	781	3.4	48	72	A6/30	A6/20
6.00-19	8	4.5	TT	165	6.5	814	32.0	381	15.0	2413	95.0	615	1353	3.3	48	91	A8/40	A8/25
6.50-20	8	4.5	TT	173	6.8	864	34.0	406	16.0	2565	101.0	850	1870	3.3	48	102	A6/30	A6/20
7.50-20	8 12	5.5	TT	203	8.0	920	36.2	432	17.0	2718	107.0	1030 1320	2266 2904	3.5 4.0	50 58	109 118	A6/30 A6/30	A6/20 A6/20



SW-99

BIAS TRACTOR FRONT TYRES

- Offers better durability and self cleaning.
- Sturdy and strong body plies for longer durability.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
5.00-12	6	3.0	TT	140	5.5	580	22.8	270	10.6	1736	68.3	265	583	3.2	45	62	A6/30	A6/20
5.00-15	6	4.0	TT	140	5.5	655	25.8	305	12.0	1956	77.0	475	1045	3.7	54	82	A8/40	A8/25
5.50-16	6	4.0	TT	150	5.9	710	27.9	330	13.0	2083	82.0	530	1166	3.6	52	86	A6/30	A6/20
6.00-16	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	670	1474	4.4	64	94	A6/30	A6/20
7.50-20	8	5.5	TT	203	8.0	920	36.2	432	17.0	2718	107.0	1030	2266	3.5	50	109	A8/40	A8/25
	1320											2900	4.0	58	118	A6/30	A6/20	



SW-55

BIAS TRACTOR FRONT TYRES

- On and off road type for 2WD tractor.
- Ensures better steering control on fields.
- Extra deep tread.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
6.00-16	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	670	1474	4.4	64	94	A6/30	A6/20
	10											775	1705	4.7	68	99	A6/30	A6/20
	12											800	1760	5.8	84	100	A6/30	A6/20
7.50-16	10	5.5	TT	205	8.0	808	31.8	381	15.0	2413	95.0	1030	2266	4.8	70	109	A6/30	A6/20
7.50-20	10	5.5	TT	203	8.0	920	36.2	432	17.0	2718	107.0	1150	2530	4.8	70	113	A6/30	A6/20



SW-66

BIAS TRACTOR FRONT TYRES

- On and off road type for 2WD tractor.
- Ensures better steering control on fields.
- Extra deep tread.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
6.00-16	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	670	1474	4.4	64	94	A6/30	A6/20
	12											800	1760	5.8	84		100	A6/30



TWIN RIB

BIAS TRACTOR FRONT TYRES

- On and off road type for 2WD tractor.
- Ensures better steering control on fields.
- Extra deep tread.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
9.00-16	10	7.0	TT/TL	234	9.2	854	33.6	406	16.0	2540	100.0	1250	2750	3.8	55	116	A6/30	A6/20
10.00-16	10	7.0	TT/TL	275	10.8	900	35.4	406	16.0	2692	106.0	1360	2992	2.8	41	119	A8/40	A8/25
11.00-16	12	10	TT/TL	320	12.6	970	38.1	457	18.0	2896	114.0	1600	3520	2.5	36	124	A8/40	A8/25



SW-44

BIAS TRACTOR FRONT TYRES

- On and off road type for 2WD tractor.
- Ensures better steering control on fields.
- Extra deep tread.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
6.00-16	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	670	1474	4.4	64	94	A6/30	A6/20
	10											775	1705	4.7	68		99	A6/30



SW-101

BIAS TRACTOR FRONT TYRES

- Specially designed lugs for comfortable drive and added traction.
- Ideal for heavy duty application.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
6.00-16	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	670	1474	4.4	64	94	A6/30	A6/20
6.50-16	8	4.5	TT	175	6.8	760	29.9	356	14.0	2286	90.0	750	1650	3.3	48	98	A6/30	A6/20
7.50-16	8	5.5	TT	205	8.0	808	31.8	381	15.0	2413	95.0	875	1925	3.7	54	103	A6/30	A6/20
	12											1300	2860	4.7	68		118	A6/30
7.50-18	8	5.5	TT	205	8.0	869	34.2	406	16.0	2565	101.0	950	2090	3.7	54	106	A8/40	A8/25
	12											1360	2990	4.3	62		119	A8/40



SW-201

BIAS TRACTOR FRONT TYRES

- On and off road type for 2WD tractor.
- Ensures better steering control on fields.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
4.00-15	4	3.0	TT	112	4.4	610	24.0	295	11.6	1854	73.0	307	675	3.1	45	67	A6/30	A6/20
	6											355	780	3.5	50	72	A6/30	A6/20
4.00-16	4	3.0	TT	112	4.4	640	25.2	305	12.0	1956	77.0	325	715	3.3	48	69	A6/30	A6/20
4.50-16	4	3.0	TT	122	4.8	665	26.2	305	12.0	1956	77.0	290	640	3.1	44	65	A6/30	A6/20
	6											365	803	3.3	48	73	A6/30	A6/20
5.00-16	6	4.0	TT	140	5.5	680	26.8	330	13.0	2032	80.0	400	880	4.1	60	76	A8/40	A8/25
	8											500	1100	4.4	64	84	A8/40	A8/25
5.50-16	6	4.0	TT	150	5.9	710	27.9	330	13.0	2083	82.0	530	1166	3.6	52	86	A8/40	A8/25
6.00-16	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	670	1474	4.4	64	94	A6/30	A6/20
6.50-16	8	4.5	TT	175	6.8	760	29.9	356	14.0	2286	90.0	750	1650	3.3	48	98	A6/30	A6/20
7.50-16	8	5.5	TT	205	8.0	808	31.8	381	15.0	2413	95.0	875	1925	3.7	54	103	A6/30	A6/20
	12											1360	2990	4.1	60	119	A6/30	A6/20
6.00-18	8	4.5	TT	165	6.5	795	31.3	457	18.0	2340	92.1	710	1562	3.2	47	96	A8/40	A8/25
7.50-18	8	5.5	TT	203	8.0	869	34.2	406	16.0	2565	101.0	950	2090	3.7	54	106	A8/40	A8/25
6.00-19	8	4.5	TT	165	6.5	814	32.0	381	15.0	2413	95.0	925	2035	4.2	60	105	A8/40	A8/25
6.50-20	8	4.5	TT	173	6.8	864	34.0	406	16.0	2565	101.0	850	1870	3.3	48	102	A6/30	A6/20
	8											1030	2266	3.3	48	109	A8/40	A8/25
7.50-20	8	5.5	TT	203	8.0	920	36.2	432	17.0	2718	107.0	1320	2900	4.0	58	118	A6/30	A6/20
	12																	



4 RIB

BIAS TRACTOR FRONT TYRES

- Specially designed to firm the soil around the seed.
- Extra deep ribs help to keep planter in line on hills.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
10.00-16	10	7.0	TT/TL	275	10.8	900	35.4	406	16.0	2692	106.0	1360	2992	2.8	41	119	A8/40	A8/25
11.00-16	12	10	TT/TL	320	12.6	970	38.1	457	18.0	2896	114.0	1600	3520	2.5	36	124	A8/40	A8/25



SW-200

BIAS TRACTOR FRONT TYRES

- Field and road type for 2WD tractor.
- Cut and clip resistant and heavy duty service.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
6.50-20	10	4.5	TT	173	6.8	864	34.0	406	16.0	2565	101.0	850	1870	3.3	48	102	A8/40	A8/25
														1120	2465	3.8	55	112



DUAL RIB

BIAS TRACTOR FRONT TYRES

- Specially designed to firm the soil around the seed.
- Extra deep ribs help to keep planter in line on hills.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
7.50-20	8	5.5	TT	203	8.0	942	37.1	442	17.4	2718	107.0	1030	2266	3.5	50	109	A6/30	A6/20



TF-2000

BIAS TRACTOR FRONT TYRES

- Provides excellent load distribution.
- Special version ensures extra puncture resistance.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
6.00-16	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	670	1474	4.4	64	94	A6/30	A6/20



FLOTATION KING

FLOTATION IMPLEMENT TYRES

- Suitably designed for on and off-the-road use, in all weather conditions.
- Patterns are engineered to provide excellent to drive wheels and are suited for both implement & industrial/ construction applications.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
400/60-15.5	14	13.0	TL	400	15.7	875	34.4	381	15.0	2565	101.0	2731	6010	3.6	51	136	A8/40	A8/25
	18											3256	7165	4.5	65	144	A8/40	A8/25
14.0/65-16	UNDER DEVELOPMENT																	
19.0/45-17	14	16.0	TL	470	19.0	866	34.0	380	16.0	2536	104.0	1950	4290	2.8	41	131	A8/40	A8/25
	18											4410	9702	3.3	48	148	A8/40	A8/25
520/50-17	16	20.0	TL	516	20.3	953	37.5	406	16.0	2820	111.0	4375	9625	3.6	51	147	A8/40	A8/25
400/55-22.5	16	11.75	TL	403	15.9	1020	40.1	432	17.0	3073	121.0	2574	5510	4.1	58	136	B/50	B/30
400/60-22.5	16	11.75	TL	400	15.7	1070	42.1	483	19.0	3226	127.0	2806	6175	1.5	22	136	B/50	B/30
	18											3156	6945	3.8	55	140	B/50	B/30
385/65-22.5	16	11.75	TL	385	15.2	1070	42.1	483	19.0	3226	127.0	2800	6175	3.6	22	136	B/50	B/30
	18											3150	6945	4.4	55	141	B/50	B/30
500/45-22.5	12	16.0	TL	500	19.7	1050	42.1	457	18.0	3099	122.0	2000	4400	2.7	39	132	B/50	B/30
	16											3080	6780	3.7	52	138	B/50	B/30
500/60-22.5	16	16.0	TL	500	19.7	1170	46.1	508	20.0	3480	137.0	3456	7605	2.8	41	148	B/50	B/30
550/60-22.5	16	16.0	TL	550	21.7	1240	48.8	533	21.0	3738	147.2	3760	8270	3.1	45	150	B/50	B/30
	18											4250	9350	3.2	46	155	B/50	B/30
600/50-22.5	16	20.0	TL	600	23.6	1170	46.1	508	20.0	3505	138.0	3600	8050	2.2	32	149	B/50	B/30
600/55-22.5	16	20.0	TL	600	23.6	1230	48.4	533	21.0	3708	146.0	4010	8820	2.2	32	153	B/50	B/30
700/40-22.5	18	24.0	TL	701	27.6	1170	46.1	511	20.1	3774	148.6	4250	9350	2.5	36	155	B/50	B/30
700/50-26.5	UNDER DEVELOPMENT																	
800/45-26.5	UNDER DEVELOPMENT																	



GRIPKING HD

ALL TERRAIN TRACTION TYRES

- Broad lugs and deep tread suitable for better soil tillage.
- Excellent self cleaning properties.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
6.5/80-12	6	5.0	TT	165	6.5	590	23.2	279	11.0	1753	69.0	710	1562	3.6	52	96	A8/40	A8/25
6.5/80-13	6	5.0	TT	170	6.7	640	25.1	279	11.0	1753	69.0	750	1650	3.4	50	98	A6/30	A6/20
10.0/75-15.3	10 14	9.0	TL	267	10.5	780	30.7	356	14.0	2286	90.0	1550 1900	3410 4180	3.9 5.4	57 78	123 130	A8/40 A8/40	A8/25 A8/25
11.5/80-15.3	10 14	9.0	TL	290	11.4	867	34.1	381	15.0	2540	100.0	1950 2430	4290 5346	4.4 6.5	64 69	131 139	A8/40 A8/40	A8/25 A8/25
9.0/70-16	10	8.0	TL	226	8.8	745	29.3	354	13.9	2540	100.0	1350	2970	4.3	62	119	A8/40	A8/25
9.0/75-16	10	8.0	TL	229	9.0	774	30.4	355	14.0	2545	100.2	1390	3058	4.4	64	120	A8/40	A8/25
250/80-16	10 14	8.0	TL	240	9.4	816	32.1	369	14.5	2412	95.0	1460 1600	3212 3520	3.0 3.3	44 48	121 124	A8/40 A8/40	A8/25 A8/25
260/70-16	10 14	8.0	TL	257	10.1	775	30.5	356	14.0	2550	100.4	1030 1215	2266 2675	2.3 2.8	34 40	109 115	A8/40 A8/40	A8/25 A8/25
280/70-16	10 14	9.0	TL	280	11.0	807	31.7	357	14.1	2560	100.8	1120 1360	2464 2990	2.4 2.9	34 42	112 119	A8/40 A8/40	A8/25 A8/25
9.5-16	8	7.0	TT	241	9.4	840	33.3	358	14.1	2565	101.0	1100	2420	2.1	30	112	A8/40	A8/25
15.0/55-17	10 14	13.0	TL	380	14.9	872	34.3	377	14.8	2490	98.0	2120 2575	4664 5665	3.5 4.9	51 71	134 141	A8/40 A8/40	A8/25 A8/25
19.0/45-17	14 18	16.0	TL	491	19.3	875	34.4	381	15.0	2565	101.0	3000 3550	6600 7810	3.8 4.1	55 60	146 152	A8/40 A8/40	A8/25 A8/25
400/55-17.5	14	13.0	TT/TL	400	15.7	800	31.5	390	15.3	2585	101.8	2900	6380	3.6	52	144	A8/40	A8/25
8-18	6	6.0	TT	203	8.0	840	33.0	381	15.0	2515	99.0	615	1353	1.9	27	91	A8/40	A8/25
10.5/80-18	10	9.0	TL	274	10.7	907	35.7	406	16.0	2667	105.0	1950	4290	3.6	52	131	A8/40	A8/25
11.5/80-18	UNDER DEVELOPMENT																	
12.5/80-18	12	9.0	TL	308	12.1	987	38.8	432	17.0	2896	114.0	2650	5830	3.6	52	142	A8/40	A8/25
250/80-18	10 14	8.0	TL	251	9.9	857	33.7	406	16.0	2667	105.0	1600 1900	3520 4180	3.7 4.0	54 58	124 130	A8/40 A8/40	A8/25 A8/25
275/80-18	10 14	8.0	TL	275	10.8	906	35.6	406	16.0	2667	105.0	1650 1900	3630 4180	3.7 3.8	54 55	125 130	A8/40 A8/40	A8/25 A8/25
280/70-18	10 14	9.0	TL	280	11.0	849	33.4	406	16.0	2667	105.0	1180 1950	2595 4290	2.3 3.8	34 55	114 131	A8/40 A8/40	A8/25 A8/25
6.50-20	8	4.5	TT	175	6.8	865	34.0	409	16.1	2578	101.5	825	1815	2.8	41	101	A6/30	A6/20
7.50-20	8	6.0	TT	214	8.4	904	35.5	432	17.0	2692	106.0	1360	2992	3.2	46	119	A6/30	A6/20
9.5-20	8	7.0	TT	241	9.5	955	37.6	449	17.7	2942	115.8	975	2145	2.8	41	107	A6/30	A6/20
16.0/70-20	10 14	14.0	TL	418	16.4	1097	43.1	483	19.0	3226	127.0	3075 3750	6765 8250	3.4 4.8	50 70	147 154	A8/40 A8/40	A8/25 A8/25



GRIPKING R-1

ALL TERRAIN TRACTION / BIAS ROW CROP TYRES

- Traction patterns, designed for on and off- the-road use, in all weather conditions.
- Patterns are engineered to provide excellent traction to drive wheels and are suited for both implement and agriculture applications.
- Specially designed bias tyre for row crop.
- Excellent self cleaning properties and ensures no damage to the crops.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
3.50-6	4	2.5	TT	101	4.0	345	13.5	214	8.4	1340	52.8	165	363	2.6	38	45	A8/40	A8/25
3.50-8	4	2.5	TT	101	4.0	372	14.6	218	8.6	1390	54.7	185	407	2.6	38	49	A8/40	A8/25
4.80/4.00-8	4	3.0	TT	114	4.4	425	16.7	195	7.7	1251	49.3	170	374	1.6	23	46	A8/40	A8/25
3.50-10	4	2.5	TT	101	4.0	440	17.3	205	8.1	1286	50.6	250	550	3.2	46	60	A8/40	A8/25
4.00-10	4	3.0	TT	110	4.3	466	18.3	217	8.5	1364	53.7	300	660	3.5	50	66	A8/40	A8/25
4.50-10	4	3.5	TT	130	5.1	483	19.0	227	8.9	1430	56.2	355	781	3.5	50	72	A8/40	A8/25
5.00-10	4	4.0	TT	140	5.5	512	20.1	235	9.3	1508	59.4	400	880	3.7	53	76	A6/30	A6/20
5.00-12	6	4.0	TT	145	5.7	580	22.8	271	10.7	1731	68.1	265	583	3.2	54	62	A6/30	A6/20
7.00-12	8	6.0	TT	187	7.4	683	26.8	305	12.0	2007	79.0	560	1232	3.2	54	88	A6/30	A6/20
6-14	6	5.0	TT	157	6.1	655	26.0	305	12.0	1956	77.0	355	780	2.2	32	72	A6/30	A6/20
	8											400	880	2.4	35	76	A6/30	A6/20
7-14	6	6.0	TT	180	7.0	691	27.2	330	13.0	2057	81.0	412	906	1.8	25	77	A6/30	A6/20
	8											475	1045	2.1	30	82	A6/30	A6/20
4.00-15	4	3.0	TT	115	4.5	615	24.2	284	11.2	1819	71.6	265	583	3.1	45	62	A6/30	A6/20
5.00-15	6	4.0	TT	145	5.7	657	25.8	305	12.0	1956	77.0	475	1045	3.6	52	82	A6/30	A6/20
6.5/80-15	8	5.0	TT	163	6.4	663	26.1	310	12.2	1976	77.8	630	1386	4.8	72	92	A6/30	A6/20
690x180-15	6	5.0	TT	176	6.9	690	27.1	322	12.7	2055	80.9	925	2035	2.8	41	105	A6/30	A6/20
7.5L-15	8	6.0	TT	210	8.2	795	31.2	356	14.0	2286	90.0	800	1760	3.6	51	100	A8/40	A8/25
7.00-15	8	5.5	TT	183	7.2	715	28.0	331	13.0	2126	83.7	1060	2332	3.6	51	110	A8/40	A8/25
7.50-15	8	6.0	TT	208	8.1	770	30.3	359	14.1	2308	90.9	1320	2904	3.1	45	118	A8/40	A8/25
8.0/75-15	6	6.5	TT	199	7.8	708	27.8	326	12.8	2093	82.4	1100	2420	3.5	49	112	A8/40	A8/25
4.00-16	6	4.0	TT	115	4.5	640	25.2	308	12.1	1932	76.1	290	638	3.0	44	73	A8/40	A8/25
4.50-16	6	4.0	TT	122	4.8	655	25.8	311	12.2	1952	76.9	365	803	3.2	47	69	A8/40	A8/25
5.00-16	6	4.0	TT	150	5.9	710	27.9	330	13.0	2083	82.0	400	880	3.7	54	76	A8/40	A8/25
6.00-16	8	4.5	TT	170	6.6	745	29.3	330	13.0	2184	86.0	670	1474	4.1	60	94	A8/40	A8/25
6.50-16	8	4.5	TT	180	7.0	765	30.1	330	13.0	2184	86.0	750	2035	4.1	60	94	A8/40	A8/25
7-16	6	5.5	TT	183	7.2	740	29.1	333	13.1	2205	86.8	500	1100	2.5	36	84	A8/40	A8/25
7.50-16	8	5.5	TT	190	7.5	810	31.9	381	15.0	2388	94.0	1120	2464	3.1	45	112	A8/40	A8/25
	12											1360	2992	4.3	62	119	A8/40	A8/25
8-16	8	7.0	TT	203	8.0	813	32.0	381	15.0	2362	93.0	1300	2860	1.9	27	118	A8/40	A8/25
8.25-16	8	7.0	TT	229	9.0	848	33.3	354	13.9	2540	100.0	1060	2332	2.1	30	110	A8/40	A8/25

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
3.00-17	6	1.85	TL	80	3.2	602	23.7	285	11.2	1800	70.9	190	418	2.8	41	50	A8/40	A8/25
100/90-17	6	2.50	TL	101	4.0	612	26.6	288	11.3	1830	72.1	218	480	2.3	34	55	A8/40	A8/25
3.00-18	6	1.85	TL	80	3.2	627	24.7	297	11.7	1875	73.9	200	440	2.8	41	52	A8/40	A8/25
100/90-18	6	2.50	TL	101	4.0	637	25.1	301	11.9	1905	75.0	224	493	2.3	34	56	A8/40	A8/25
7.50-18	8	6.0	TT	214	8.4	854	33.6	406	16.0	2540	100.0	1180	2596	3.0	44	114	A8/40	A8/25
3.25-19	6	2.15	TL	89	3.5	665	26.2	314	12.4	1988	78.3	250	550	2.8	41	60	A8/40	A8/25
3.50-19	6	2.15	TL	93	3.7	675	26.2	318	12.5	2018	79.5	272	598	2.8	41	63	A8/40	A8/25
4.50-19	6	3.0	TL	122	4.8	736	29.0	343	13.5	2146	84.5	487	1071	4.4	64	83	A8/40	A8/25
4.00-21	6	3.0	TL	115	4.5	762	30.0	350	13.8	2247	88.5	180	396	1.8	25	48	A8/40	A8/25
5.00-21	6	4.0	TL	140	5.5	823	32.4	360	14.2	2310	91.0	435	957	2.7	38	79	A8/40	A8/25
8.3-28	8	7.0	TT	211	8.3	1095	43.1	533	21.0	3251	128.0	1000	2200	2.4	34	108	A6/30	A6/20
9.5-28	8	8.0	TT	241	9.5	1156	45.5	543	21.4	3350	132.0	1180	2596	2.8	40	114	A6/30	A6/20
4.00-30	4	3.0	TT	116	4.5	995	39.1	457	18.0	2938	115.7	355	781	1.3	19	72	A6/30	A6/20
7.2-30	6	6.0	TT	183	7.2	1095	43.1	533	21.0	3225	126.9	690	1518	2.1	30	95	A6/30	A6/20
	8	6.0										775	1705	2.4	35	99	A6/30	A6/20
9.5-30	8	8.0	TT	241	9.5	1200	47.2	559	22.0	3531	139.0	1215	2673	2.8	40	115	A6/30	A6/20
8.3-32	8	7.0	TT	211	8.3	1193	47.0	584	23.0	3581	141.0	1090	2398	3.2	45	111	A6/30	A6/20
9.5-32	8	8.0	TT	241	9.5	1255	49.4	584	23.0	3683	145.0	1285	2827	2.4	35	117	A6/30	A6/20
4.00-36	6	3.0	TT	120	4.7	1140	44.9	524	20.6	3364	132.5	412	906	2.8	41	77	A6/30	A6/20
4.50-36	6	3.0	TT	135	5.3	1150	45.2	530	20.9	3402	134.0	450	990	2.4	35	80	A6/30	A6/20
5.00-36	6	3.0	TT	145	5.7	1175	46.2	540	21.3	3456	136.0	462	1016	2.4	35	81	A6/30	A6/20
7.2-36	8	6.0	TT	183	7.2	1255	49.4	610	24.0	3810	150.0	1000	2200	3.3	48	108	A6/30	A6/20
8.3-36	8	7.0	TT	211	8.3	1293	50.9	610	24.0	3810	150.0	1150	2530	3.2	46	113	A6/30	A6/20
9.5-36	8	8.0	TT	241	9.5	1359	53.5	623	24.5	4000	157.5	1320	2904	2.4	35	118	A6/30	A6/20
12.4-36	8	11.0	TT	315	12.4	1465	57.7	686	27.0	4318	170.0	1700	3740	2.3	33	126	A6/30	A6/20
8.3-38	8	7.0	TT	211	8.3	1350	53.1	621	24.5	3986	157.0	1250	2750	3.5	50	116	A6/30	A6/20
9.5-38	8	8.0	TT	241	9.5	1405	55.3	646	25.5	4147	163.3	1800	3960	2.4	35	128	A6/30	A6/20
11.2-38	6	10.0	TT	284	11.2	1465	57.7	693	27.2	4343	171.0	1320	2900	2.4	35	117	A6/30	A6/20
	12											1550	3410	2.9	42	123	A6/30	A6/20
12.4-38	8	11.0	TT	315	12.4	1511	59.4	716	28.2	4496	177.0	1750	3850	2.3	33	127	A6/30	A6/20
	12											2120	4664	2.8	41	134	A6/30	A6/20



GRIPKING R-1 HD

ALL TERRAIN TRACTION TYRES

- Ideal for soil tillage on muddy ground.
- Deeper lugs provide excellent traction and self cleaning properties.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
5-12 (5.00-12)	6	4.0	TT	145	5.7	580	22.8	271	10.7	1731	68.1	265	583	3.3	48	62	A6/30	A6/20
6-12 (6.00-12)	6	4.0	TT	165	6.5	635	25.0	299	11.8	1735	68.3	345	759	2.5	36	71	A6/30	A6/20
	8											475	1045	3.4	49	82	A6/30	A6/20



GRIP QUEEN

BIAS ROW CROP TYRES

- Excellent traction and directional stability.
- Deep lugs, low slip and optimized rubber compounds help reduce wear to give exceptionally long tire life.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
4.00-21	6	3.0	TT	115	4.5	762	30.0	350	13.8	2247	88.5	180	396	1.8	25	48	A8/40	A8/25
4.00-36	4	3.0	TT	120	4.7	1140	44.9	524	20.6	3364	132.5	355	780	2.2	32	72	A6/30	A6/20
	6											412	906	2.8	41	77	A6/30	A6/20
	8											475	1045	3.1	45	82	A6/30	A6/20



PK-307

AGRICULTURAL IMPLEMENT TYRES

- Specially developed for soil tillage and transport applications .
- Provides maximum handling comfort.
- Minimum soil compaction.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
19.0/45-17	14	16.0	TL	491	19.3	870	34.3	381	15.0	2540	100.0	2800	6160	2.8	51	144	A8/40	A8/25
	18											6930	4.3	62	148	A8/40	A8/25	
	22											7810	3.9	56	152	A8/40	A8/25	
500/50-17	14	16.0	TL	503	19.8	945	37.2	381	15.0	2490	98.0	3550	7810	3.8	55	152	A8/40	A8/25
	18											9075	4.7	68	157	A8/40	A8/25	



PK-305

AGRICULTURAL IMPLEMENT TYRES

- Specially developed for soil tillage and transport applications .
- Provides maximum handling comfort.
- Minimum soil compaction.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
400/60-15.5	10	13.0	TL	404	15.9	874	34.4	381	15.0	2565	101.0	2240	4928	3.5	51	136	A8/40	A8/25
	14											6380	3.4	50	145	A8/40	A8/25	
	18											7150	4.4	64	149	A8/40	A8/25	
15.0/55-17	10	13.0	TL	391	15.4	850	33.5	381	15.0	2489	98.0	2120	4664	3.5	51	134	A8/40	A8/25
	14											5675	4.9	71	141	A8/40	A8/25	
	18											7165	6.5	94	149	A8/40	A8/25	



PK-303

AGRICULTURAL IMPLEMENT TYRES

- Ideally designed for implement and trailers.
- Special tread compound ensures extended product life.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
7.00-12	8	4.25	TL	185	7.3	665	26.2	305	12.0	1956	77.0	825	1815	3.7	53	101	A8/40	A8/25
	10											925	2035	4.0	58	105	A8/40	A8/25
10.0/80-12	10	9.0	TL	264	10.4	710	28.0	305	12.0	2083	82.0	1450	3200	5.4	78	121	A8/40	A8/25
23x10.50-12	6	8.50	TL	260	10.0	585	23.0	262	11.0	1697	69.0	800	1760	2.2	32	100	A4/20	A4/12
	10											975	2145	2.6	38	107	A8/40	A8/25
	14											1120	2464	3.0	44	112	A4/20	A4/12
10.0/75-15.3	10	9.0	TL	264	10.4	760	29.9	356	14.0	2235	88.0	1550	3410	5.2	75	123	A8/40	A8/25
	12											1700	3750	6.4	93	126	A8/40	A8/25
	14											1900	4180	6.9	101	130	A8/40	A8/25
	18											2360	5200	7.1	103	138	A8/40	A8/25
	22											2750	6050	7.5	108	144	A8/40	A8/25
11.5/80-15.3	12	9.0	TL	290	11.4	845	33.2	381	15.0	2464	97.0	2180	4800	4.6	66	135	A8/40	A8/25
	14											2430	5346	6.5	94	139	A8/40	A8/25
	16											2575	5675	7.1	103	141	A8/40	A8/25
	18											2725	5995	7.2	105	143	A8/40	A8/25
	22											2900	6380	7.6	110	145	A8/40	A8/25
12.5/80-15.3	14	9.0	TL	315	12.4	890	35.0	381	15.0	2591	102.0	2650	5825	4.3	62	142	A8/40	A8/25
	16											2800	6160	5.4	78	144	A8/40	A8/25
	18											3450	7590	6.3	89	151	A8/40	A8/25
	22											3650	8030	5.5	80	153	A8/40	A8/25
	280/60-15.5											14	9.0	TL	280	11.0	730	28.7
7.50-16	12	4.25	TL	362	14.0	905	36.0	380	16.0	2697	110.0	1320	2904	4.5	65	118	A8/40	A8/25
	16											1500	3300	5.7	82	122	A8/40	A8/25
	18											1800	7590	4.0	57	128	A8/40	A8/25
340/55-16	14	11.0	TL	336	13.2	770	30.3	345	13.6	2255	88.8	2240	4928	5.8	84	136	A8/40	A8/25
	18											2500	5500	6.2	90	140	A8/40	A8/25
10.5/65-16	10	9.0	TL	274	10.8	755	29.7	356	14.0	2210	87.0	1550	3410	5.3	75	123	A8/40	A8/25
	14											1900	4180	7.1	104	130	A8/40	A8/25
280/70-16	10	9.0	TL	280	11.0	780	30.7	363	14.3	2250	88.6	1250	2750	2.4	34	116	A8/40	A8/25
13.0/55-16	10	11.0	TL	336	13.2	770	30.3	356	14.0	2261	89.0	1850	4070	4.1	60	129	A8/40	A8/25
	14											2240	4928	5.8	84	136	A8/40	A8/25
13.0/70-16	10	11.0	TL	336	13.2	770	30.3	356	14.0	2261	89.0	2060	4540	4.8	69	133	A8/40	A8/25
	14											2240	4928	5.7	82	136	A8/40	A8/25
13.0/75-16	10	11.0	TL	340	13.4	900	35.4	406	16.0	2718	107.0	2360	5200	4.1	59	138	A8/40	A8/25
	14											2841	6263	5.7	82	144	A8/40	A8/25
14.0/65-16	14	11.0	TL	353	13.9	871	34.3	381	15.0	2540	100.0	2900	6380	5.5	80	145	A8/40	A8/25
360/70-16	12	11.0	TL	362	14.0	905	36.0	380	16.0	2697	110.0	2300	5060	2.4	35	137	A8/40	A8/25
	10											1950	4290	3.8	55	131	A8/40	A8/25
10.5/80-18	10	9.0	TL	275	10.8	885	35.0	406	16.0	2591	102.0	2180	4796	4.1	59	135	A8/40	A8/25
	12																	

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
12.5/80-18	12	9.0	TL	308	12.1	965	38.0	432	17.0	2819	111.0	2650	5830	4.8	70	142	A8/40	A8/25
	16											3350	7370	5.5	80	150	A8/40	A8/25
13.0/65-18	16	11.0	TL	336	13.2	890	35.0	406	16.0	2616	103.0	2800	6160	6.7	97	144	A8/40	A8/25
	18											3650	8030	7.4	107	153	A8/40	A8/25
340/70-18 (12.0-18)	16	11.0	TL	342	13.5	902	35.5	410	16.1	2642	104.0	3650	8050	7.2	103	153	A8/40	A8/25



TRENCHER

AGRICULTURAL IMPLEMENT TYRES

- Ideal for trenchers and implement machinery.
- Large contact area provides high traction.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
23x10.50-12	6	8.5	TL	264	10.4	574	22.6	262	10.3	1697	66.8	775	1705	2.2	32	99	A3/15	A3/9
	14											1000	2200	3.5	50	108	A3/15	A3/9
26x12.00-12	8	10.5	TL	305	12.0	660	26.0	283	11.1	1856	73.0	1285	2827	3.0	43	117	A4/20	A4/12
	12											1600	3520	4.4	64	124	A4/20	A4/12
29x12.50-15	8	10.0	TL	310	12.2	745	29.3	320	12.6	1950	76.8	850	1870	2.3	34	102	A4/20	A4/12
	10											975	2145	2.8	40	107	A4/20	A4/12
31x15.50-15	10	13.0	TL	394	15.5	795	31.3	358	14.0	2362	93.0	1450	3190	3.5	50	121	A4/20	A4/12



I-1

AGRICULTURAL IMPLEMENT TYRES

- Low section implement tyres offering high load capacity with minimum soil compaction.
- Ideal tyres for modern farming, suitable for both on and off-the road applications.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
9.5L-14	8	7.0	TL	240	9.4	735	28.9	330	13.0	2159	85.0	1090	2400	3.0	43	111	D/65	D/40
	12											1360	2990	3.6	52	119	D/65	D/40
11L-14	8	8.0	TL	274	10.8	746	29.4	333	13.1	2209	87.0	1120	2464	2.4	35	112	D/65	D/40
	12											1250	2750	3.3	48	116	D/65	D/40
5.90-15	4	4.5	TL	152	6.0	657	25.9	295	11.6	1955	77.0	530	1166	2.5	36	86	D/65	D/40
6.70-15	6	4.5	TL	167	6.6	703	27.7	330	13.0	2082	82.0	730	1605	3.0	44	97	D/65	D/40
7.60-15	6	5.5	TL	190	7.5	718	28.3	325	12.8	2184	86.0	800	1760	2.8	41	100	D/65	D/40
	8											950	2090	3.5	51	106	D/65	D/40
	12											1100	2420	3.6	52	111	D/65	D/40
9.5L-15	8	7.0	TL	241	9.5	765	30.1	330	13.0	2235	88.0	1090	2400	3.0	44	111	D/65	D/40
	12											1320	2904	3.6	52	118	D/65	D/40
11L-15	8	8.0	TL	270	10.6	770	30.3	330	13.0	2261	89.0	1150	2530	2.5	36	113	D/65	D/40
	12											1360	2992	3.0	44	119	D/65	D/40
	20											1964	4320	5.2	75	131	D/65	D/40
12.5L-15	8	10.0	TL	310	12.2	818	32.2	356	14.0	2413	95.0	1360	2990	2.5	36	119	D/65	D/40
	12											1750	3850	3.5	51	127	D/65	D/40
	16											2240	4928	4.5	65	136	D/65	D/40
	24											2725	5995	5.2	75	143	D/65	D/40
31x13.50-15	8	10.0	TL	347	13.7	779	30.7	351	13.8	2134	84.0	1180	2600	3.1	45	114	D/65	D/40
	12											1600	3520	4.5	65	124	D/65	D/40
6.00-16	8	4.5	TL	165	6.5	720	28.3	335	13.2	2134	84.0	690	1518	3.0	43	95	D/65	D/40
6.50-16	8	4.5	TL	175	6.9	750	29.5	335	13.2	2134	84.0	710	1562	2.8	41	96	D/65	D/40
	10											800	1760	3.0	43	100	D/65	D/40
7.00-16	12	5.0	TL	180	7.1	715	28.1	348	13.7	2210	87.0	900	1980	3.0	43	104	D/65	D/40
7.50-16	12	5.5	TL	190	7.5	745	29.3	360	14.2	2311	91.0	1215	2675	4.2	60	115	D/65	D/40
9.00-16	10	6.0	TL	234	9.2	845	33.3	374	26.4	2475	97.5	1500	3300	3.6	52	122	D/65	D/40
	12											1700	3740	4.0	57	126	D/65	D/40
11L-16	8	8.0	TL	270	10.6	795	31.3	356	14.0	2337	92.0	1215	2675	2.5	36	115	D/65	D/40
	12											1490	3275	3.5	51	122	D/65	D/40
12.5L-16	8	10.0	TL	310	12.2	845	33.2	381	15.0	2464	97.0	1450	3190	2.7	40	121	D/65	D/40
	12											1800	3960	3.5	51	128	D/65	D/40
	14											2000	4400	3.8	55	132	D/65	D/40
14L-16.1	8	11.0	TL	355	14.0	927	36.5	419	16.5	2565	101.0	1750	3850	2.1	31	127	D/65	D/40
	12											2120	4665	3.0	44	134	D/65	D/40
	10											2360	5192	2.5	36	138	D/65	D/40
16.5L-16.1	14	14.0	TL	434	17.1	1023	40.3	455	17.9	2794	110.0	2725	5995	3.0	44	143	D/65	D/40
	16											2900	6380	3.3	48	145	D/65	D/40
	12											2725	5995	2.2	31	143	D/65	D/40
19.5L-16.1	14	16.0	TL	490	19.3	1023	40.3	470	18.5	2921	115.0	2900	6380	2.5	36	145	D/65	D/40
	10											3000	6600	1.9	27	146	D/65	D/40
21.5L-16.1	14	18.0	TL	533	21.0	1102	43.4	490	19.3	3048	120.0	3450	7790	2.2	32	151	D/65	D/40
	10											3450	7790	2.2	32	151	D/65	D/40



FHS

FARM & HIGHWAY SERVICE (DOT) IMPLEMENT TYRES

- Offers D.O.T. compliance for approved operation at highway speeds.
- Noted for its great handling and towing characteristics.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
9.5L-15FI	FPLY	7.0	TL	249	9.8	767	30.2	343	13.5	2260	89	1580	3476	6.2	90	124	J/100	J/60
11-15LT	FPLY	8.0	TL	266	10.5	790	31.1	353	13.9	2336	92	1800	3960	6.2	90	128	J/100	J/60
12.5-15LT	FPLY	10.0	TL	325	12.8	838	33.0	368	14.5	2464	97	2120	4664	6.2	90	134	J/100	J/60



RIB-777

AGRICULTURAL IMPLEMENT TYRES

- Ideal for modern and suitable for on and off the road application.
- Low section implement tyre.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
300/65-12	8	9.0	TL	305	12.0	685	27.0	305	12.0	2007	79.0	1500	3300	3.6	51	122	A8/40	A8/25
200/60-14.5	10	6.8	TL	210	8.3	610	24.0	279	11.0	1778	70.0	1030	2270	6.9	100	109	A8/40	A8/25
	1150											2530	7.1	103	113	A8/40	A8/25	
250/65-14.5	12	8.0	TL	260	10.2	694	27.3	303	12.0	1978	77.9	1550	3410	6.5	92	123	A8/40	A8/25



GRIPKING HD

FORESTRY TYRES

- Excellent for both Heavy Duty Agricultural and Forestry applications which ensures good all-round performance in Forestry usage as well as good traction Load Capability and Durability in Agricultural / Forestry operations.
- Developed for use on powerful forestry Tractors / Machinery.
- Deep Tread lugs mean high traction at the work area.
- Long service life thanks to the use of a wear resistant tread compound.

SIZE	Rim Width (inch)	TYPE	UNLOADED DIMENSION		Static Loaded Radius (mm) (inch)	Rolling Circumference ± 2.5 % (mm) (inch)	Ply Rating	Inflation Pressure (bar) (psi)	CONSTANT LOAD APPLICATION								
			Section Width (mm) (inch)	Overall Diameter (mm) (inch)					SPEED KMPH / MPH						RECOMMENDED LOAD KD / LBS		
									DRIVE WHEEL						FORESTRY USE		
			10 6	20 12					30 19	40 25	50 31	10*HT 6*HT	10*LT 6*LT				
24"	11.2-24	DW10 W10 W10H	TUBETYPE	284 11.2	1112.0 43.8	518 20.4	3346 131.7	14PR	2.0	2460	1610	1190	1140	1070	970	1070	1320
									29.0	5420	3550	2620	2510	2360	240	2360	2900
									2.2	2600	1700	1250	1210	1130	1030	1130	1390
									32.0	5730	3740	2750	2670	2490	2270	2490	3060
									32.0	5730	3740	2750	2670	2490	2270	2490	3060
									2.4	2740	1790	1320	1270	1190	1080	1190	1460
									35.0	6040	3940	2910	2800	2620	2380	2620	3220
									2.6	2880	1880	1390	1340	1250	1140	1250	1540
									38.0	6340	4140	3060	2950	2750	2510	2750	3380
									2.8	3010	1970	1450	1400	1310	1190	1310	1610
									41.0	6630	4340	3190	3080	2890	2620	2890	3550
									3.0	3130	2040	1510	1460	1360	1240	1360	1670
44.0	6890	4490	3330	3220	3000	2730	3000	3690									
	12.4-24	DW11 W11 DW10 W10	TUBETYPE	315 12.4	1175.0 46.3	524 20.6	3407 134.1	16PR	2.5	3400	2220	1640	1580	1480	1350	1480	1820
									36.0	7490	4890	3610	3480	3260	2970	3260	4010
									2.7	3570	2330	1720	1660	1550	1410	1550	1910
									39.0	7860	5130	3790	3660	3410	3110	3410	4190
									2.9	3700	2420	1790	1720	1610	1470	1610	1980
									42.0	8150	5330	3940	3790	3550	3240	3550	4370
									3.1	3860	2520	1860	1800	1680	1530	1680	2070
									45.0	8500	5550	4100	3960	3700	3370	3700	4550
									3.3	4000	2610	1930	1860	1740	1580	1740	2140
									48.0	8810	5750	4250	4100	3830	3480	3830	4710
									3.5	4140	2700	2000	1930	1800	1640	1800	2210
									51.0	9120	5950	4410	4250	3960	3610	3960	4870
	13.6-24	DW12 W12 W11	TUBETYPE	345 13.6	1210 47.6	542 21.3	3531 139.0	16PR	1.5	3080	2010	1490	1430	1340	1220	1340	1650
									22.0	6780	4430	3280	3150	2950	2690	2950	3630
									1.7	3310	2160	1600	1540	1440	1310	1440	1770
									25.0	7290	4760	3520	3390	3170	2890	3170	3900
									1.9	3520	2300	1700	1640	1530	1390	1530	1880
									28.0	7750	5070	3740	3610	3370	3060	3370	4150
									2.1	3750	2450	1810	1740	1630	1480	1630	2000
									30.0	8260	5400	3990	3830	3590	3260	3590	4420
									2.3	3930	2570	1900	1830	1710	1560	1710	2100
									33.0	8660	5660	4190	4030	3770	3440	3770	4640
									2.5	4140	2700	2000	1930	1800	1640	1800	2240
									42.0	9120	5950	4410	4250	3960	3610	3960	4930
	14.9-24	DW13 W13	TUBETYPE	378 14.9	1245 49.0	562 22.1	3673 144.6	16PR	1.5	3610	2360	1740	1680	1570	1430	1570	1930
									22.0	7950	5200	3830	3700	3460	3150	3460	4260
									1.7	3890	2540	1880	1810	1960	1540	1690	2080
									25.0	8570	5990	4140	3990	3720	3390	3720	4580
									1.9	4160	2720	2010	1940	1810	1650	1810	2230
									28.0	9160	5990	4430	4270	3990	3630	3990	4910
									2.1	4420	2880	2130	2050	1920	1750	1920	2360
									30.0	9740	6340	4690	4520	4230	3850	4230	5200
									2.5	4880	3180	2350	2270	2120	1930	2120	2610
									36.0	10750	7000	5180	5000	4670	4250	4670	5740
									3.0	5430	3540	2620	2530	2360	2150	2360	2900
									44.0	11960	7800	5770	5570	5200	4740	5200	6400

	SIZE	Rim Width (inch)	TYPE	UNLOADED DIMENSION		Static Loaded Radius (mm) (inch)	Rolling Circumference ± 2.5 % (mm) (inch)	Ply Rating	Inflation Pressure (bar) (psi)	CONSTANT LOAD APPLICATION							
				Section Width (mm) (inch)	Overall Diameter (mm) (inch)					SPEED KMPH / MPH							
										RECOMMENDED LOAD KD / LBS							
				DRIVE WHEEL								FORESTRY USE					
				STATIC	10 6					20 12	30 19	40 25	50 31	10*HT 6*HT	10*LT 6*LT		
26"	18.4-26	W16L W15L	TUBETYPE	467	1440	656	4273	16PR	1.1	4050	2640	1950	1880	1760	1600	1760	2160
				18.4	56.7	25.8	168.2		16.0	8920	5810	4300	4140	3880	2520	3880	4770
									1.3	4490	2930	2160	2090	1950	1770	1950	2400
									19.0	9890	6450	4760	4600	4300	3900	4300	5290
									1.5	4850	3170	2340	2260	2110	1920	2110	2600
									22.0	10680	6980	5150	4980	4650	4230	4650	5720
									1.7	5254	3420	2530	2440	2280	2070	2280	2800
									25.0	1150	7530	5570	5370	5020	4560	5020	6170
									1.9	5590	3650	2700	2600	2430	2210	2430	2990
									28.0	12310	8040	5950	5730	5350	4870	5350	6580
				3.0	5920	3860	2860	3650	2575	2340	2575	3170					
				44.0	13040	8500	6300	8030	5670	5150	5670	6970					
28"	13.6-28	DW12 W12 W12D	TUBETYPE	345	1320	596	3863	16PR	1.5	3240	2120	1570	1510	1410	1280	1410	1730
				13.6	51.9	23.4	152.1		22.0	7140	4670	3460	3330	3110	2820	3110	3830
									1.7	3500	2280	1690	1630	1520	1380	1512	1870
									25.0	7710	5020	3720	3590	3350	3040	3350	4120
									1.9	3730	2430	1800	1730	1620	1470	1620	1990
									28.0	8220	5350	3960	3810	3570	3240	3570	4390
									2.1	3960	2580	1910	1840	1720	1570	1720	2120
									30.0	8720	5680	4210	4050	3790	3460	3790	4660
									2.3	4160	2720	2010	1940	1810	1650	1810	2230
									33.0	9160	5990	4430	4270	3990	3630	3990	4910
				2.5	4370	2850	2110	2030	1900	1730	1900	2340					
				36.0	9630	6280	4650	4470	4190	3810	4190	5150					
	14.9-28	DW13 W13 W12D W12	TUBETYPE	378	1365	618	4019	16PR	1.5	3840	2510	1850	1790	1670	1520	1670	2050
				14.9	53.7	24.3	158.2		22.0	8460	5530	4070	3940	3680	3350	3680	4530
									1.7	4120	2690	1990	1920	1790	1630	1790	2200
									25.0	9070	5930	4380	4230	3940	3590	3940	4850
									1.9	4390	2870	2120	2040	1910	1740	1910	2350
									28.0	9670	6320	4670	4490	4210	3830	4210	5180
									2.1	4670	3050	2250	2170	2030	1850	2030	2500
									30.0	10290	6720	4960	4780	4470	4070	4470	5500
									2.5	5180	3380	2500	2410	2250	2050	2250	2770
									36.0	11410	7440	5510	5310	4960	4520	4960	6100
				3.0	5750	3750	2780	2680	2500	2280	2500	3080					
				44.0	12670	8260	6120	5900	5510	5020	5510	6775					
	16.9-28	DW15L W15 W14L DW14	TUBETYPE	429	1440	645	4207	16PR	1.5	4740	3090	2290	2200	2060	1870	2060	2530
				16.9	56.7	25.4	165.6		22.0	10440	6810	5040	4850	4540	4120	4540	5580
									1.7	5080	3320	2450	2360	2210	2010	2210	2720
									25.0	11190	7310	5400	5200	4870	4430	4870	5990
									1.9	5430	3540	2620	2530	2360	2150	2360	2900
									28.0	11960	7800	5770	5570	5200	4740	5200	6400
									2.1	5750	3750	2780	2680	2500	2280	2500	3080
									30.0	12670	8260	6120	5900	5510	5020	5510	6780
									2.5	6370	4160	3070	2960	2770	2520	2770	3410
									36.0	14030	9160	6760	6520	6100	5550	6100	7500
				2.7	6670	4350	3220	3100	2900	2640	2900	3570					
				39.0	14690	9580	7090	6830	6390	5810	6390	7860					
30"	16.9-30	DW15L W15 W14L DW14	TUBETYPE	429	1485	684	4426	16PR	2.0	5800	3780	2800	2700	2520	2990	2520	3100
				16.9	58.5	26.9	174.3		29.0	12780	8330	6170	5950	5550	5040	5550	6830
									2.2	6120	3990	2950	2850	2660	2420	2660	3270
									32.0	13480	8790	6500	6280	5860	5330	5860	7210
									2.4	6440	4200	3110	3000	2800	2550	2800	3440
									35.0	14190	9250	6850	6610	6170	5620	6170	7590
									2.7	6900	4500	3330	3210	3000	2730	3000	3690
									39.0	15200	9910	7330	7070	6610	6010	6610	8130
38"	15.5-38	14	TUBETYPE	395	1585	737	4648	16PR	2.0	1884	3698	2739	2609	2504	2279	2507	3083
				15.5	62.4	29.0	183.0		29.0	10745	8135	6026	5739	5510	5014	5515	6783
									2.4	5140	3892	2883	2746	2636	2399	2639	3246
									35.0	11309	8563	6343	6041	5799	5278	5805	7141
									2.8	5649	4141	3067	2921	2804	2552	2807	3453
									41.0	12428	9110	6748	6427	6170	5614	6176	7596
									3.2	5884	4359	3229	3075	2952	2686	2955	3635
									47	12946	9589	7103	6765	6494	5910	6501	7996

	SIZE	Rim Width (inch)	TYPE	UNLOADED DIMENSION		Static Loaded Radius (mm) (inch)	Rolling Circumference ± 2.5 % (mm) (inch)	Ply Rating	Inflation Pressure (bar) (psi)	CONSTANT LOAD APPLICATION							
				Section Width (mm) (inch)	Overall Diameter (mm) (inch)					SPEED KMPH / MPH							
										RECOMMENDED LOAD KD / LBS							
				DRIVE WHEEL								FORESTRY USE					
				STATIC	10 6					20 12	30 19	40 25	50 31	10*HT 6*HT	10*LT 6*LT		
30"	18.4-30	W16L DW16L W15L DW15L	TUBETYPE	467 18.4	1560 61.4	712 28.0	4618 181.8	16PR	1.6	5980	3900	2890	2780	2600	2370	2600	3200
									23.0	13170	8590	6370	6120	5730	5220	5730	7050
									1.8	6390	4170	3090	2970	2780	2530	2780	3420
									26.0	14070	9190	6810	6540	6120	5570	6120	7530
									2.0	6810	4440	3290	3170	2960	2690	2960	3640
									29.0	15000	9780	7250	6980	6520	5930	6520	8020
									2.2	7200	4700	3470	3550	3130	2850	3130	3850
									32.0	15860	10350	7640	7380	6890	6280	6890	8470
									2.4	7570	4940	3650	3520	3290	2990	3290	4050
									35.0	16670	10880	8040	7750	7250	6590	7250	8920
									2.6	7940	5180	3830	3690	3450	3140	3450	4240
									38.0	17490	11410	8440	8130	7600	6290	7600	9350
34"	16.9-34	DW15 W15L W14L	TUBETYPE	429 16.9	1590 62.6	722 28.4	4693 184.8	16PR	1.5	5130	3350	2480	2390	2230	2030	2230	2740
									22.0	11300	7380	5460	5260	4910	4470	4910	6040
									1.7	5500	3590	2650	2560	2390	2170	2390	2940
									25.0	12110	7910	5840	5640	5260	4780	5260	6470
									1.9	5890	3840	2840	2740	2560	2330	2560	3150
									28.0	12970	8460	6260	6040	5640	5130	5640	6940
									2.1	6230	4070	3010	2900	2710	2470	2710	3330
									30.0	13720	8960	6630	6390	5970	5440	5970	7340
									2.3	6580	4290	3170	3060	2860	2600	2860	3520
									33.0	14490	9450	6980	6740	6300	5730	6300	7750
									2.5	6900	4500	3330	3210	3000	2730	3000	3690
									36.0	15200	9910	7330	7070	6610	6010	6610	8130
	18.4-34	W16L DW16L W15L DW15L	TUBETYPE	467 18.4	1671 65.8	750 29.5	4914 193.5	16PR	1.5	6390	4170	3090	2970	2780	2530	2780	3420
									22.0	14070	9190	6810	6540	6120	5570	6120	7530
									1.7	6880	4490	3320	3200	2990	2720	2990	3680
									25.0	15150	9890	7310	7050	6590	5990	6590	8110
									1.9	7340	4790	3540	3410	3190	2900	3190	3920
									28.0	16170	10550	7800	7510	7030	6390	7030	8650
									2.1	7800	5090	3760	3630	3390	3080	3390	4170
									30.0	17180	11210	8280	8000	7470	6780	7470	9190
									2.3	8210	5360	3960	3820	3570	3250	3570	4390
									33.0	18080	11810	8270	8410	7860	7160	7860	9670
									2.5	8630	5630	4160	4010	3750	3410	3750	4610
									36.0	19010	12400	9160	8830	8260	7510	8260	10160
38"	16.9-38	W15L DW15L W14L	TUBETYPE	429 16.9	1675 65.9	772 30.4	5007 197.1	16PR	1.6	5640	3680	2720	2620	2420	2230	2450	3010
									23.0	12420	8110	5990	5770	5400	4910	5400	6640
									1.8	6030	3930	2910	2800	2620	2380	2620	3220
									26.0	13280	8660	6410	6170	5770	5240	5770	7100
									2.0	6420	4190	3100	2990	2790	2540	2790	3430
									29.0	14140	9230	6830	6590	6150	5590	6150	7560
									2.2	6790	4430	3270	3160	2950	2680	2950	3630
									32.0	14960	9760	7200	6960	6500	5900	6500	8000
									2.4	7130	4650	3440	3320	3100	2820	3100	3810
									35.0	15700	10240	7580	7310	6830	6210	6830	8400
									2.6	7480	4880	3610	3480	3250	2960	3250	4000
									38.0	16480	10750	7950	7670	7160	6520	7160	8810
	18.4-38	W16L 16DD W16A DW15L	TUBETYPE	467 18.4	1768 69.6	813 31.6	5217 205.4	16PR	1.5	6600	4310	3190	3070	2870	2610	2870	3530
									22.0	14540	9490	7030	6760	6320	5750	6320	7770
									1.7	7110	4640	3430	3310	3090	2810	3090	3800
									25.0	15660	10220	7560	7290	6810	6190	6810	8380
									1.9	7590	4950	3660	3530	3300	3000	3300	4060
									28.0	16720	10900	8060	7780	7270	6610	7270	8940
									2.1	8050	5250	3890	3750	3500	3191	3500	4310
									30.0	17730	11560	8570	8260	7710	7030	7710	9480
									2.3	8490	5540	4100	3950	3690	3360	3690	4540
									33.0	18700	12200	9030	8700	8130	7400	8130	10000
									2.5	8910	5810	4300	4150	3875	3530	3875	4770
									36.0	19630	12800	9470	9140	8540	7780	8540	10500



IR-005

IRRIGATION TYRES

- Ideal for pivot irrigation.
- Specially designed lugs for crop protection and minimizing soil damage.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
12.4-24	6	11.0	TT/TL	315	12.4	1170	46.1	508	20.0	3200	126.0	1215	2673	1.6	23	115	A6/30	A6/20
	8											1320	2900	1.8	26		118	A6/30
14.9-24	6	13.0	TT/TL	378	14.9	1265	49.8	584	23.0	3658	144.0	1550	3410	1.4	20	123	A6/30	A6/20
	8											1800	3960	1.8	26		128	A6/30



IR-007

IRRIGATION TYRES

- Designed for irrigation service with minimal soil compaction and excellent wear.
- Long service life thanks to the use of a wear resistant tread compound.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
11.2-24	6	10.0	TT/TL	284	11.2	1105	43.5	508	20.0	3200	126.0	1060	2330	1.8	26	110	A6/30	A6/20
	8											1120	2465	2.1	30		112	A6/30
14.9-24	6	13.0	TT/TL	378	14.9	1265	49.8	584	23.0	3658	144.0	1550	3410	1.4	20	123	A6/30	A6/20
	8											1800	3960	1.8	26		128	A6/30
11.2-38	6	10.0	TT/TL	284	11.2	1463	57.6	693	27.3	4343	171.0	1285	2827	1.8	26	117	A6/30	A6/20
	8											1550	3410	2.1	30		123	A6/30



IR-009

IRRIGATION TYRES

- Specially designed lug design is ideal for irrigation application.
- Minimize soil damage and excellent wear.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
11.2-24	6	10.0	TT/TL	284	11.2	1105	43.5	508	20.0	3200	126.0	1060	2330	1.8	26	110	A6/30	A6/20
	8											1120	2465	2.1	30	112	A6/30	A6/20
14.9-24	6	13.0	TT/TL	378	14.9	1265	49.8	584	23.0	3658	144.0	1550	3410	1.4	20	123	A6/30	A6/20
	8											1800	3960	1.8	26	128	A6/30	A6/20
11.2-38	6	10.0	TT/TL	284	11.2	1463	57.6	693	27.3	4343	171.0	1285	2827	1.8	26	117	A6/30	A6/20
	8											1550	3410	2.1	30	123	A6/30	A6/20



AGRI ND-5

IRRIGATION TYRES

- Specially designed lug design is ideal for irrigation application.
- Minimize soil damage and excellent wear.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
11.2-24	6	10.0	TT/TL	284	11.2	1105	43.5	508	20.0	3200	126.0	1060	2330	1.8	26	110	A6/30	A6/20
	8											1120	2465	2.1	30	112	A6/30	A6/20
14.9-24	6	13.0	TT/TL	378	14.9	1265	49.8	584	23.0	3658	144.0	1550	3410	1.4	20	123	A6/30	A6/20
	8											1800	3960	1.8	26	128	A6/30	A6/20
11.2-38	6	10.0	TT/TL	284	11.2	1463	57.6	693	27.3	4343	171.0	1285	2827	1.8	26	117	A6/30	A6/20
	8											1550	3410	2.1	30	123	A6/30	A6/20



Y-LUG

IRRIGATION TYRES

- Wider and stronger tread with durable sidewall.
- Low air pressure ensures less compaction.
- Wider profile for better flotation and foot.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
11.2-24	6	10.0	TT/TL	284	11.2	1105	43.5	508	20.0	3200	126.0	1060	2330	1.8	26	110	A6/30	A6/20
	8											1120	2465	2.1	30	112	A6/30	A6/20
14.9-24	6	13.0	TT/TL	378	14.9	1265	49.8	584	23.0	3658	144.0	1550	3410	1.4	20	123	A6/30	A6/20
	8											1800	3960	1.8	26	128	A6/30	A6/20
11.2-38	6	10.0	TT/TL	284	11.2	1463	57.6	693	27.3	4343	171.0	1285	2827	1.8	26	117	A6/30	A6/20
	8											1550	3410	2.1	30	123	A6/30	A6/20

GOLF CART ***Tyres***





POWER PLUS

GOLF CART TYRES

- Specially designed for golf cart.
- Ensures best comfort and ground protection.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
205/60-8 (18x8.50-8)	6	5.5	TL	216	8.5	460	18.1	202	8.0	1334	52.5	475	1045	2.2	32	82	A4/20	A4/12
	10											568	1250	3.9	56		88	A4/20



BME-01

GOLF CART TYRES

- Specially designed for golf cart.
- Specific tread pattern helps to prevent turf damages.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
205/60-8 (18x8.50-8)	4	6.5 J	TL	205	8.1	453	17.8	191	7.5	1343	52.9	325	715	2.2	32	69	J/100	J/62



GC-007

GOLF CART / LAWN MOWER TYRES

- Specially designed for golf cart.
- Ensures best comfort and ground protection.
- Extra deep tread.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED		
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph	
205/60-8 (18x8.50-8)	4	6.5 J	TL	205	8.1	453	17.8	191	7.5	1343	52.9	325	715	2.2	32	69	J/100	J/62	
	6											475	1045	2.2	32		82	J/100	J/62
	10											568	1250	3.9	56		88	J/100	J/62
205/50-10	6	7.0	TL	216	8.5	460	18.1	202	8.0	1360	53.5	460	1012	3.2	32	63	A6/30	A6/20	



POWER PLUS HD

GOLF CART TYRES

- Suitable for golf cart applications.
- Specially Tread design makes a tyre gentle on the ground and ensures easy handling.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
20.5x8.00-10	6	6.0	TL	203	8.0	528	20.8	223	8.8	1450	57.1	500	1100	4.2	60	84	A4/20	A4/12
	10											705	1550	5.9	85	96	A4/20	A4/12
	12											800	1760	6.2	90	100	A4/20	A4/12
22.5x8.00-12	10	6.5	TL	221	8.7	546	21.5	254	10.0	1560	61.4	1150	2530	6.2	90	113	A4/20	A4/12
	12											1215	2673	6.9	100	115	A4/20	A4/12



T-01

LAWN MOWER TYRES

- Suitable for mowers.
- Special tread compound ensures better performance.
- Extra deep tread.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
23x10.50-12	6	8.5	TL	254	10.0	589	23.2	262	10.3	1697	66.8	690	1518	1.8	26	95	A4/20	A4/12
	8											875	1925	2.8	41	103	A4/20	A4/12
	14											1120	2464	3.0	44	112	A4/20	A4/12
26x12.00-12	8	10.5	TL	310	12.2	640	25.2	283	11.1	1856	73.1	1250	2790	3.0	44	116	A4/20	A4/12



AVANTI

LAWN & GARDEN TYRES

- Suitable for lawn and garden applications.
- High NSD & special compound.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
2.80/2.50-4	4	2.0	TT	69	2.7	218	8.6	103	4.1	661	26.0	95	209	1.4	20	26	A3/15	A3/9



SUPERGRIP

LAWN & GARDEN TYRES

- Gentle on the ground and protects the field from damages.
- Specially designed tread pattern ensure easy handling.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
3.00-4	4	2.0	TT	85	3.3	259	10.2	122	4.8	783	30.8	110	242	1.6	23	32	A3/15	A3/9



VENUS

LAWN & GARDEN TYRES

- Suitable for lawn and garden applications..
- Ensures long product life.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
4.10/3.50-4	4	3.0	TT	105	4.1	279	11.0	132	5.2	847	33.3	160	352	1.6	23	44	A3/15	A3/9



TRACKING

LAWN & GARDEN TYRES

- Unmatched stability, durability and puncture resistance.
- Strong sidewall and enhance service life.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
13x5.00-6	4	3.5	TL	130	5.1	317	12.5	145	5.7	943	37.1	200	440	2.8	40	52	A4/20	A4/12
	6											215	474	4.2	61	57	A4/20	A4/12
15x6.00-6	6	4.5	TL	155	6.1	366	14.4	160	6.3	1059	41.7	335	737	3.1	45	70	A4/20	A4/12
	10											400	880	3.5	50	76	A4/20	A4/12
16x6.50-8	6	5.3	TL	170	6.7	406	16.0	182	7.2	1183	47.0	355	780	2.8	41	72	A4/20	A4/12
	10											430	950	3.9	56	78	A4/20	A4/12



FIELD STAR

SPORTS GROUND TYRES

- Unique tyres specifically designed for sports ground.
- Suitable for soccer, cricket, baseball and hockey grounds.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
4.00-8	4	3.75	TL	122	4.8	420	16.6	305	670	2.8	40	56	A8/40	A8/25



MICO



***RADIAL
INDUSTRIAL
TYRES***



MP-70

RADIAL INDUSTRIAL TYRES

- Made for Agro / Industrial applications.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper tread providing longer tire life.
- Extra strength and stability.
- Special wear resistant tread compound durability and long service life

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
340/80R18 12.5/80R18	W 11	W 10	TL	345	13.8	1005	39.6	460	18.1	3025	119.1	143 A8	143 B	2725	5995	4.0	58	475
340/80R20 12.5/80R20	11	W 10 W 11	TL	345	13.8	1050	41.3	480	18.9	3215	126.6	144 A8	144 B	2800	6160	4.0	58	500
380/75R20 14.5L R20	W 12	W 11	TL	384	15.1	1074	42.3	485	19.1	3250	128.0	148 A8	148 B	3150	6930	4.0	58	525
460/70R24 17.5L R24	DW 15L	DW 14L DW 16L	TL	465	18.3	1229	48.4	556	21.9	3840	151.2	159 A8	159 B	4375	9625	4.0	58	600
500/70R24 19.5L R24	DW 16L	DW 15L DW 18L	TL	485	19.1	1321	52.0	584	23.0	3950	155.5	164 A8	164 B	5000	11000	4.0	58	625
480/80R26 18.4R26	DW 15L	DW 16L DW 18L	TL	479	19.0	1428	56.2	638	25.1	4287	155.5	167 A8	167 B	5450	11990	4.0	58	675
440/80R28 16.9R28	DW 14L	DW 13L DW 15L	TL	441	17.3	1415	55.7	643	25.3	4278	168.4	152 A8	152 B	3550	7810	3.2	46	675



IND-70

RADIAL INDUSTRIAL TYRES

- Special tread compound for cut & heat resistant.
- Suitable for backhoe loader.
- Provide great traction in drive wheels.
- Extra wide lugs to provide stability during service.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
460/70R-24 17.5L R-24	DW 15L	DW 14L DW 16L	TL	465	18.3	1229	48.4	556	21.9	3840	151.2	159 A8	159 B	4375	9625	4.0	58	600
500/70R-24 19.5L R-24	DW 16L	DW 15L DW 18L	TL	485	19.1	1321	52.0	584	23.0	3950	155.5	164 A8	164 B	5000	11000	4.0	58	625



MP-70

STEEL BELTED RADIAL INDUSTRIAL TYRES

- Made for Agro / Industrial applications.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper tread providing longer tire life.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
340/80R18 12.5R18	W 11	W 10	TL	345	13.8	1005	39.6	460	18.1	3025	119.1	143 A8	143 B	2725	5995	4.0	58	475
340/80R20 12.5R20	11	W 10 W 11	TL	345	13.8	1050	41.3	480	18.9	3215	126.6	144 A8	144 B	2800	6160	4.0	58	500
380/75R20 14.5L R20	W 12	W 11	TL	384	15.1	1074	42.3	485	19.1	3250	128.0	148 A8	148 B	3150	6930	4.0	58	525
460/70R24 17.5L R24	DW 15L	DW 14L DW 16L	TL	465	18.3	1229	48.4	556	21.9	3840	151.2	159 A8	159 B	4375	9625	4.0	58	600
500/70R24 19.5L R24	DW 16L	DW 15L DW 18L	TL	485	19.1	1321	52.0	584	23.0	3950	155.5	164 A8	164 B	5000	11000	4.0	58	625
480/80R26 18.4R-26	DW 15L	DW 16L DW 18L	TL	479	19.0	1428	56.2	638	25.1	4287	155.5	167 A8	167 B	5450	11990	4.0	58	675
440/80R28 16.9R-28	DW 14L	DW 13L DW 15L	TL	441	17.3	1415	55.7	643	25.3	4278	168.4	152 A8	152 B	3550	7810	3.2	46	675



IND-70

STEEL BELTED RADIAL INDUSTRIAL TYRES

- Suitable for backhoe loader.
- Provide great traction in drive wheels.
- Extra strength and stability.
- Special tread compound for cut and heat resistance.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
460/70R-24 17.5L R-24	DW 15L	DW 14L DW 16L	TL	465	18.3	1229	48.4	556	21.9	3840	151.2	159 A8	159 B	4375	9625	4.0	58	600
500/70R-24 19.5L R-24	DW 16L	DW 15L DW 18L	TL	485	19.1	1321	52.0	584	23.0	3950	155.5	164 A8	164 B	5000	11000	4.0	58	625



MP-60

RADIAL INDUSTRIAL TYRES

- Provide best performance on and off-the-road.
- Ideal for heavy duty service.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
400/70R20 16.0/70R20	DW 13	12 SDC; 13 SDC; 14	TL	404	15.9	1067	42.0	475	18.7	3198	125.9	149 A8	149 B	3250	7150	4.0	58	500
405/70R20	DW 13	DW 12 DW 13 DW 14	TL	405	15.9	1060	42.0	475	18.7	3198	125.9	149 A8	149 B	3250	7150	4.0	58	500
400/70R24 16.0/70 R24	DW 13	DW 12 DW 13 DW 14	TL	404	15.9	1170	46.1	532	20.1	3526	138.9	152 A8	152 B	3550	7810	4.0	58	550
405/70R24	DW 13	DW 12 DW 13 DW 14	TL	405	15.9	1172	46.0	532	20.1	3526	138.9	152 A8	152 B	3550	7810	4.0	58	550



MP-60

STEEL BELTED RADIAL INDUSTRIAL TYRES

- Provide best performance on and off-the-road.
- Ideal for heavy duty service.
- Extra strength and stability.
- Special tread compound for cut and heat resistance.

SIZE	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	rec	alt		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
400/70R-20 16.0/70 R-20	DW 13	12 SDC; 13 SDC; 14	TL	404	15.9	1067	42.0	475	18.7	3198	125.9	149 A8	149 B	3250	7150	4.0	58	500
405/70R-20	DW 13	DW 12 DW 13 DW 14	TL	405	15.9	1060	42.0	475	18.7	3198	125.9	149 A8	149 B	3250	7150	4.0	58	500
400/70R-24 16.0/70 R-24	DW 13	DW 12 DW 13 DW 14	TL	404	15.9	1170	46.1	532	20.1	3526	138.9	152 A8	152 B	3550	7810	4.0	58	550
405/70R-24	DW 13	DW 12 DW 13 DW 14	TL	405	15.9	1172	46.0	532	20.1	3526	138.9	152 A8	152 B	3550	7810	4.0	58	550



SSR-77

RADIAL SKID STEER TYRES

- Deeper depth tyre tread for longer life. Bigger and sturdier blocks.
- Excellent chip and tear resistance compound. Extra thick side wall with rim guard gives protection against damages.

SIZE	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	inch		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
260/70R-16.5 10R-16.5	8.25	TL	260	10.2	772	30.4	348	13.7	2345	92.3	129 A8	137 A2	1850	4070	4.0	58	370
300/70R16.5 12R-16.5	9.75	TL	300	11.8	833	32.8	374	14.7	2479	97.2	137 A8	145 A2	2300	5060	4.0	58	400



SSR-77

STEEL BELTED RADIAL SKID STEER TYRES

- Deeper depth tyre tread for longer life. Bigger and sturdier blocks.
- Excellent chip and tear resistance compound. Extra thick side wall with rim guard gives protection against damages.
- Special compound to carry heavy loads.

SIZE	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Index / Speed Symbol		Max Load Capacity		Inflation Pressure		Speed Radius Index
	inch		mm	inch	mm	inch	mm	inch	mm	inch			kg	lbs	bar	psi	
260/70R-16.5 10R-16.5	8.25	TL	260	10.2	772	30.4	348	13.7	2345	92.3	129 A8	137 A2	1850	4070	4.0	58	370
300/70R16.5 12R-16.5	9.75	TL	300	11.8	833	32.8	374	14.7	2479	97.2	137 A8	145 A2	2300	5060	4.0	58	400

INDUSTRIAL TYRES



 **HEAVY DUTY** 
PERFORMANCE



PORT-GRIP-X

EARTHMOVER & PORT TYRES

- Specially designed for port application.
- Heavy duty tyre with high load capacity.
- Excellent traction on both wet & dry surfaces

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
18.00-25	40	13.0	TL	528	20.8	1675	66.0	765	30.1	4955	195.8	22950	50490	10.0	145	217	A2/10	A2/6
18.00-33	UNDER DEVELOPMENT																	



EM-999

EARTHMOVER & PORT TYRES

- Special tread compound enables less heat generation.
- Specially designed for heavy duty port applications.
- Cut & chip resistant compound.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
10.00-20	20	8.0	TT	274	10.8	1075	42.3	494	19.4	3171	124.8	2725	5995	7.5	109	143	B/50	B/30
11.00-20	18	8.0	TT	297	12.0	1115	44.0	529	22.0	3368	137.0	3000	6600	7.6	110	146	B/50	B/30
14.00-24	24	10.0	TL	373	14.7	1368	53.8	635	25.0	4039	159.0	9500	20900	8.3	120	186	A2/10	A2/6
	10300											22660	9.1	132	189	A2/10	A2/6	
14.00-25	24	10.0	TL	375	14.8	1368	53.8	635	25.0	4039	159.0	9500	20900	8.5	123	186	A2/10	A2/6
	10000											22000	9.2	133	188	A2/10	A2/6	
	10600											23320	10.0	145	190	A2/10	A2/6	
18.00-25	32	13.0	TL	510	20.1	1615	63.6	739	29.1	4780	188.2	20950	46090	10.3	150	214	A2/10	A2/6
	40											22950	50490	9.0	131	217	A2/10	A2/6
26.5-25	28	22.0	TL	690	27.2	1740	68.5	830	32.7	5195	204.6	9000	19800	3.0	40	181	B/50	B/30
												15500	34100	4.8	70	203	A2/10	A2/6



ROCK LUG E-3

EARTHMOVER & PORT TYRES

- The special non-directional tread design formulated with silica based tread compound, together with a heavy duty nylon carcass makes it capable of withstanding cuts, snags and bruises under all service conditions.
- Extra thick side wall with rim guard gives protection against damage.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
9.00-20	18	7.5	TT	259	10.2	1035	42.7	476	18.7	3056	120.3	2650	5830	6.8	99	136	B/50	B/30
10.00-20	20	8.0	TT	274	10.8	1075	42.3	494	19.4	3171	124.8	2725	5995	7.5	109	143	B/50	B/30
11.00-20	18	8.0	TT	297	12.0	1115	44.0	529	22.0	3368	137.0	3000	6600	7.6	110	146	B/50	B/30
17.5/65-20	14	14.0	TL	450	17.7	1090	42.9	483	19.0	3302	130.0	3250	7150	2.4	35	149	A8/40	A8/25
	16											3450	7590	2.8	40	151	A8/40	A8/25
14.00-24	24	10.0	TL	373	14.7	1368	53.8	635	25.0	4039	159.0	9500	20900	8.3	120	186	A2/10	A2/6
	28											10300	22660	9.1	132	189	A2/10	A2/6
16.9-24	12	15.0	TL	460	18.1	1310	52.5	584	23.0	3785	149.0	3150	6930	2.8	40	148	A2/10	A2/6
	16											3875	8525	3.3	48	155	A2/10	A2/6
17.5L-24	16	15.0	TL	462	18.2	1280	50.0	559	22.0	3683	145.0	3908	8598	3.3	47	155	A2/10	A2/6
	20											4750	10450	3.6	52	162	A2/10	A2/6
14.00-25	24	10.0	TL	375	14.8	1374	54.1	635	25.0	4039	159.0	9500	20900	8.3	120	186	A2/10	A2/6
	28											10600	23320	8.4	122	190	A2/10	A2/6
15.5-25	12	12.0	TL	394	15.5	1278	50.3	569	22.4	3658	144.0	5600	12320	4.0	57	168	A2/10	A2/6
	16											6300	13860	4.3	62	172	A2/10	A2/6
	18											6900	15180	4.5	65	175	A2/10	A2/6
	20											7300	16060	4.8	70	177	A2/10	A2/6
17.5-25	16	14.0	TL	432	17.0	1344	52.9	635	25.0	3955	156.0	7300	16060	4.6	67	177	A2/10	A2/6
	20											8250	18150	5.5	80	181	A2/10	A2/6
	24											8500	18700	5.9	85	182	A2/10	A2/6
	28											9750	21450	6.2	90	187	A2/10	A2/6
20.5-25	20	17.0	TL	531	20.9	1486	58.5	686	27.0	4394	173.0	9500	20900	4.4	64	186	A2/10	A2/6
	24											10300	22660	5.3	76	189	A2/10	A2/6
	28											11800	25960	5.4	78	194	A2/10	A2/6
23.5-25	20	19.5	TL	599	23.6	1610	63.4	749	29.5	4854	191.1	9500	20900	4.0	58	174	A2/10	A2/6
	24											12500	27500				A2/10	A2/6
	28											13200	29040				A2/10	A2/6
26.5-25	28	22.0	TL	690	27.2	1740	68.5	830	32.7	5195	204.6	15500	34100	4.8	70	203	A2/10	A2/6
29.5-25	UNDER DEVELOPMENT																	



POWERGRIP G-2

GRADER TYRES

- Rugged sturdy tyres for drive wheels of off-the-road equipment.
- Tough carcass and special trade compound with weather and ozone resistant properties to withstand cuts, snags and bruises in the most severe operating conditions.
- An open spaced traction pattern with self cleaning property provides traction capability, ideally suited for graders.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
13.00-24	12	8.0	TL	340	13.4	1280	50.4	584	23.0	3785	149.0	2725	5995	3.0	44	143	A8/40	A8/25
	16											3250	7150	3.9	57	149	A8/40	A8/25
14.00-24	12	10.0	TL	375	14.7	1350	53.1	610	24.0	4013	158.0	3075	6750	2.4	35	147	A8/40	A8/25
	16											3650	8030	3.4	50	153	A8/40	A8/25
15.5/80-24	16	12.0	TL	384	15.0	1262	50.0	570	23.0	3875	153.0	6825	15015	4.0	58	151	A8/40	A8/25
440/80-24	16	14.0	TL	440	17.3	1320	52.0	597	23.5	3950	155.5	5600	12320	5.0	73	168	A8/40	A8/25
15.5-25	12	12.0	TL	386	15.2	1270	50.0	571	22.5	3772	148.5	2650	5830	2.5	36	142	A8/40	A8/25
	16											3250	7150	3.1	45	149	A8/40	A8/25
17.5-25	12	14.0	TL	444	17.5	1331	52.4	597	23.5	3950	155.5	2900	6380	3.5	50	145	A8/40	A8/25
	16											3350	7370	3.9	56	150	A8/40	A8/25



MONSTER G-5

GRADER TYRES

- Extra deep tread with sturdy lug design. Strong casing with heat and cut resistant tread compound provide longer life.
- Extra thick side wall with rim guard gives protection against damage.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
13.00-24	16	8.0	TL	340	13.4	1280	50.4	584	23.0	3785	149.0	3250	7150	4.0	58	149	A8/40	A8/25
14.00-24	16	10.0	TL	375	14.7	1350	53.1	610	24.0	4013	158.0	3650	8030	3.7	54	153	A8/40	A8/25



MONSTER L-5

SKID STEER TYRES

- Extra deep tread with sturdy lug design. Strong casing with heat and cut resistant tread compound provide longer life.
- Extra thick side wall with rim guard gives protection against damage.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
10.0/75-15.3	14	9.0	TL	259	10.2	775	30.5	356	14.0	2311	91.0	2120	4664	4.7	68	134	A6/30	A6/18
10-16.5	12	8.25	TL	268	10.6	795	31.3	366	14.4	2337	92.0	2180	4796	4.4	64	135	A8/40	A8/20
12-16.5	14	9.75	TL	315	12.4	838	33.0	384	15.1	2515	99.0	2360	5192	4.7	68	147	A2/10	A2/6
14-17.5	14	10.5	TL	355	14.0	925	36.4	427	16.8	2743	108.0	2650	5830	5.5	80	142	A6/30	A6/18



IND-165

SKID STEER TYRES

- Deep tread, extra thick sidewall and tough casing ensure longer life.
- Silica & natural rubber base compound provides greater chip & tear resistance.
- Extra thick side wall with rim guard gives protection against damage.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
10-16.5	10	8.25	TL	264	10.4	773	30.4	356	14.0	2286	90.0	2120	4664	5.2	75	134	A2/10	A2/6
	12											2360	5192	6.2	90	138	A2/10	A2/6
12-16.5	12	9.75	TL	307	12.1	831	30.4	381	15.0	2438	96.0	2900	6380	5.5	90	145	A2/10	A2/6
	14											3075	6765	6.2	90	147	A2/10	A2/6



STEERKING HD+

SKID STEER TYRES

- Premium conventional skid steer tyre with deeper tread depth, premium compound, large tread lugs heavier sidewall.
- Extra thick side wall with rim guard gives protection against damage.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
10-16.5	10	8.25	TL	268	10.6	780	30.7	360	14.2	2290	90.2	1550	3410	5.1	74	123	A8/40	A8/25
	12											1700	3740	5.2	75	126	A8/40	A8/25
12-16.5	12	9.75	TL	315	12.4	825	32.5	375	14.8	2435	95.9	2060	4532	5.4	78	133	A8/40	A8/25
	14											3075	6765	6.2	90	147	A2/10	A2/6



STEERKING +

SKID STEER TYRES

- Wide wall tyres with side wall and rim guard protectors, meant for the value conscious performance oriented applications.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
10-16.5	10	8.25	TL	268	10.6	780	30.7	360	14.2	2300	90.6	1560	3432	5.1	74	123	A8/40	A8/25
	12											1650	3630	5.2	75	125	A8/40	A8/25
12-16.5	12	9.75	TL	315	12.4	830	32.7	370	14.6	2435	95.9	1850	4070	4.4	64	129	A8/40	A8/25
	14											3075	6765	6.2	90	147	A2/10	A2/6



STEER PLUS HD

SKID STEER TYRES

- Premium tyre with extra deep tread and thick sidewalls providing better traction, puncture resistance and longer life.
- Specially designed rim guard ensures greater protection against flats and wheel damage in the rim flange area.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
23x8.50-12	6	7.0	TL	216	8.5	584	23.0	254	10.0	1727	68.0	600	1320	3.3	48	90	A8/40	A8/25
27x8.50-15	8	7.0	TL	218	8.6	676	26.6	305	12.0	2006	79.0	950	2090	4.1	60	106	A8/40	A8/25
31.5x13-16.5	14	9.75	TL	328	12.9	803	31.6	356	14.0	2337	92.0	2430	5346	4.7	68	139	A8/40	A8/25
33x15.5-16.5	14	13.0	TL	394	15.5	838	33.0	381	15.0	2464	97.0	3150	6930	5.1	74	148	A8/40	A8/25
14-17.5	14	10.5	TL	348	13.7	940	37.0	406	16.0	2743	108.0	2650	5830	5.5	80	155	A2/10	A2/6
15-19.5	14	11.75	TL	401	15.8	1036	40.8	457	18.0	3048	120.0	3350	7370	4.8	70	150	A8/40	A8/25



ROCKMASTER

SKID STEER TYRES

- Premium conventional skid steer tyre with deeper tread depth, premium compound, large tread lugs heavier sidewall.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
10-16.5	10	8.25	TL	268	10.5	795	31.3	360	14.2	2345	92.3	1950	4290	4.1	60	131	A8/40	A8/25
	12											2180	4796	5.2	75	135	A8/40	A8/25
12-16.5	12	9.75	TL	325	12.8	855	33.7	387	15.2	2520	99.2	2360	5192	4.1	60	138	A8/40	A8/25
	14											3075	6765	6.2	90	147	A2/10	A2/6



ROCK PLUS HD

SKID STEER TYRES

- Deep tread, extra thick sidewall and tough casing ensure longer life.
- Silica & natural rubber base compound provides greater chip & tear resistance.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
10-16.5	12	8.25	TL	268	10.6	795	31.3	356	14.0	2286	90.0	2120	4664	5.1	74	134	A8/40	A8/25
12-16.5	14	9.75	TL	320	12.6	840	33.1	398	15.7	2520	99.2	3075	6765	6.2	90	147	A2/10	A2/6
10.00-20	18	8.25	TT	284	11.2	1080	42.5	508	20.0	3175	125.0	6500	14300	8.3	120	173	A8/40	A8/25
	20											6900	15180	9.8	142	175	A8/40	A8/25
12.00-20	20	8.50	TT	320	12.6	1151	45.3	530	20.9	3390	133.5	7750	17050	9.0	130	179	A6/30	A6/18



OFFROADER

INDUSTRIAL BACKHOE LOADER TYRES

- Premium tyres with superior tread compound, larger tread lugs and extra heavy sidewall.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
240/55D17.5	10	6.75	TL	229	9.0	731	28.7	2120	4665	6.8	99	134	B/50	B/30



DUGRIGGER

INDUSTRIAL BACKHOE LOADER TYRES

- Strong and sturdy heavy duty design.
- Cut and crack resistant tread compound.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
355/55D625	14	11.75	TL	355	14.0	935	36.8	3550	7810	3.7	53	152	B/50	B/30
385/65D19.5	UNDER DEVELOPMENT													
385/65D22.5	16	11.75	TL	390	15.3	1090	42.9	5600	12320	6.9	100	152	B/50	B/30



AT-999

INDUSTRIAL BACKHOE LOADER TYRES

- Extra wide lugs designed to resist buckling, tearing and cracking.
- Excellent tread wear and road ability, the laterally designed lugs result in even wear.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
33x12.5-15	8	10.0	TL	318	12.5	851	33.5	381	15.0	2489	98.0	2120	4664	3.2	46	134	A8/40	A8/25
12.5/70-16	14	10.0	TL	315	12.4	853	33.6	381	15.0	2590	102.0	1650	3630	2.6	38	125	A8/40	A8/25
15.5/60-18	14	13.0	TL	401	15.8	950	37.4	432	17.0	2870	113.0	2430	5346	2.6	38	139	A8/40	A8/25
15.5/70-18 (400/70-18)	12	13.0	TL	401	15.8	1031	40.6	483	19.0	3099	122.0	2430	5346	2.4	35	139	A8/40	A8/25
17.5/65-20	14	14.0	TL	450	17.7	1090	42.9	483	19.0	3302	130.0	3250	7150	2.4	35	149	A8/40	A8/25
16.9-24	12	15.0	TL	450	17.7	1303	51.3	584	23.0	3785	149.0	3250	7150	2.6	37	149	A8/40	A8/25
	3875											8525	3.3	48	155	A8/40	A8/25	
17.5L-24	12	15.0	TL	452	17.8	1270	50.0	559	22.0	3683	145.0	3150	6930	2.6	38	148	A8/40	A8/25
	3750											8250	3.3	48	154	A8/40	A8/25	
18.4-24	12	16.0	TL	472	18.6	1372	54.0	603	24.0	4039	159.0	3875	8525	2.4	35	155	A8/40	A8/25
	4375											9625	3.0	44	159	A8/40	A8/25	
19.5L-24	12	16.0	TL	495	19.5	1321	52.0	584	23.0	3835	151.0	3450	7590	2.3	33	151	A8/40	A8/25
	4125											9075	3.0	44	157	A8/40	A8/25	
18.4-26	12	16.0	TL	480	18.9	1422	56.0	635	25.0	4140	163.0	4000	8800	2.4	36	156	A8/40	A8/25
	4875											10725	3.1	45	163	A8/40	A8/25	
16.9-28	12	15.0	TL	450	17.7	1410	55.5	635	25.0	4140	163.0	3550	7810	2.6	38	152	A8/40	A8/25
	4125											9075	3.3	48	157	A8/40	A8/25	



F-3

INDUSTRIAL BACKHOE LOADER TYRES

- Specially designed for soil tillage operations.
- Suitable for implement machinery and trailers.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
11L-15	12	8.0	TL	280	11.0	813	32.0	355	14.0	2362	93.0	1180	2596	4.0	58	114	A8/40	A8/25
11L-16	12	8.0	TL	280	11.0	820	32.3	381	15.0	2438	96.0	1250	2750	4.3	62	116	A8/40	A8/25
	1360											2992	4.8	70	119	A8/40	A8/25	



POWER LUG R-4

INDUSTRIAL BACKHOE LOADER TYRES

- Strong and sturdy heavy duty design.
- Effective self cleaning properties.
- Ideal for backhoe loaders.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
16.9-24	12	15.0	TL	440	17.3	1308	51.5	584	23.0	3861	152.0	3250	7150	2.6	38	149	A8/40	A8/25
	16											3875	8525	3.3	48	155	A8/40	A8/25
17.5L-24	12	15.0	TL	445	17.5	1270	50.0	559	22.0	3683	145.0	3150	6930	2.6	38	148	A8/40	A8/25
	16											3750	8250	3.3	48	154	A8/40	A8/25
18.4-24	12	16.0	TL	472	18.6	1375	54.1	603	32.7	4039	159.0	3875	8525	2.4	35	155	A8/40	A8/25
	16											4375	9625	3.0	44	159	A8/40	A8/25
19.5L-24	12	16.0	TL	495	19.5	1325	52.1	584	23.0	3835	151.0	3450	7590	2.3	33	151	A8/40	A8/25
	16											4125	9075	3.0	44	157	A8/40	A8/25
21L-24	12	18.0	TL	533	21.0	1377	54.2	610	24.0	3988	157.0	3875	8525	2.2	32	155	A8/40	A8/25
	16											4500	9900	2.6	38	160	A8/40	A8/25
18.4-26	12	16.0	TL	475	18.7	1425	56.1	635	25.0	4191	165.0	4000	8800	2.4	35	156	A8/40	A8/25
	16											4875	10725	3.1	45	163	A8/40	A8/25
16.9-28	12	15.0	TL	440	17.3	1410	55.5	635	25.0	4140	163.0	3550	7810	2.6	38	152	A8/40	A8/25
	16											4125	9075	3.3	48	157	A8/40	A8/25
16.9-30	12	15.0	TL	440	17.3	1460	57.5	660	26.0	4216	166.0	3650	8030	2.6	38	153	A8/40	A8/25
	16											4250	9350	3.1	45	158	A8/40	A8/25



IND-999

INDUSTRIAL BACKHOE LOADER TYRES

- Extra wide lugs designed to resist buckling, tearing and cracking.
- Multi step lug design provides better self cleaning and stability.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
12.5/80-18	12	9.0	TL	307	12.1	988	38.9	432	17.0	2896	114.0	2650	5830	3.7	54	142	A8/40	A8/25
	16											3150	6930	4.9	70	148	A8/40	A8/25



MONSTER L-5

INDUSTRIAL BACKHOE LOADER TYRES

- Extra deep tread with sturdy lug design. Strong casing with heat and cut resistant tread compound provide longer life.
- Extra thick side wall with rim guard gives protection against damage.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
11L-16	14	8.0	TL	280	11.0	820	32.3	381	15.0	2438	96.0	1360	2992	4.8	70	119	A8/40	A8/25
12.5/80-18	12	9.0	TL	305	12.0	975	38.4	432	17.0	2896	114.0	2120	4665	3.1	45	134	A8/40	A8/25
	16											2650	5830	3.8	55	142	A8/40	A8/25
19.5L-24	16	17.0	TL	490	19.3	1298	51.1	589	23.2	3835	151.0	4125	9075	3.0	44	157	A8/40	A8/25
18.4-26	16	16.0	TL	475	18.7	1425	56.1	635	25.0	4191	165.0	4875	10725	3.1	45	163	A8/40	A8/25
16.9-28	16	15.0	TL	440	17.3	1410	55.5	635	25.0	4140	163.0	4250	9350	3.3	48	157	A8/40	A8/25
20.5-25	24	17.0	TL	525	20.7	1490	58.7	610	610	3988	3988	10300	22660	5.3	76	189	A2/10	A2/6
	28							11800	25960	5.4	78	194	A2/10	A2/6				



MPT

INDUSTRIAL BACKHOE LOADER TYRES

- Extra wide lugs designed to resist buckling, tearing and cracking.
- Multi step lug design provides better self cleaning and stability.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
10.5/80-18	10	9.0	TL	267	10.8	910	35.8	406	16.0	2667	105.0	1950	4290	5.0	72	131	A8/40	A8/25
12.5/80-18	12	9.0	TL	307	12.1	988	38.9	432	17.0	2896	114.0	2650	5830	3.7	54	142	A8/40	A8/25
	16											3150	6930	4.9	70	148	A8/40	A8/25



SW-333

DRIVE WHEEL TYRES

- Tread specially designed to give minimum ground disturbance.
- Suitable for use on orchards, soft soil, road construction and similar applications.

SIZE	Ply Rating	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
		Inch			mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
14.9-24	8	13.0	TL	378	14.9	1262	49.7	574	22.6	3835	151.0	1800	3960	1.8	26	128	A6/30	A6/20	
	10											2000	4400	2.1	30	132	A6/30	A6/20	
	12											2240	4928	2.4	35	136	A6/30	A6/20	
23.1-26	8	20.0	TL	587	23.1	1560	61.4	686	27.0	4547	179.0	2900	6380	1.1	16	145	A6/30	A6/20	
	12											3650	8030	1.7	24	153	A6/30	A6/20	
	16											4375	9625	2.2	32	159	A6/30	A6/20	
	18											4750	10450	2.7	40	162	A6/30	A6/20	
18.4-26	12	16.0	TL	475	18.7	1430	56.3	635	25.0	4140	163.0	3000	6600	2.3	33	146	A6/30	A6/20	
	16											3550	7810	2.8	41	152	A6/30	A6/20	
13.6-28	8	12.0	TL	345	13.6	1318	51.9	587	23.1	3835	152.0	1650	3630	2.0	29	125	A6/30	A6/20	
	10											1850	4070	2.2	32	129	A6/30	A6/20	
	12											2060	4530	2.5	36	133	A6/30	A6/20	



EV-999

EXCAVATOR TYRES

- Speedways Excavator Tyres are designed for heavy duty service.
- Specially engineered tread pattern provides excellent traction, good self cleaning as well as good on the road drive ability.

SIZE	Ply Rating	Rim Width		TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
		std	alt		mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
8.25-20	14	6.5	7.0	TT	236	9.3	980	38.6	457	18.0	2972	117.0	2065	4545	6.8	98	133	B/50	B/30
9.00-20	14	7.0	7.5	TT	257	10.1	1039	40.9	483	19.0	3073	121.0	2500	5500	7.0	102	140	B/50	B/30
10.00-20	16	7.5	8.0	TT	277	10.9	1075	42.3	508	20.0	3175	125.0	3000	6600	7.6	110	146	B/50	B/30



ROAD KING

COMPACTOR TYRES

- Speedways compactor tyres are engineered to provide even distribution of ground pressure and to give optimum compaction.
- Tread compound specially formulated to endure high temperatures and minimize loose materials sticky to tyres.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
7.50-15	14	6.0	TT/TL	226	8.9	790	31.1	2300	5060	8.6	125	137	A4/20	A4/12
8.5/90-15K	14	6.0	TT/TL	231	9.1	785	30.9	2240	4928	3.4	50	136	A4/20	A4/12
9.00-20	12	7.0	TT/TL	274	10.8	1016	40.0	3150	6930	6.2	90	148	A4/20	A4/12
	14							3450	7590	7.2	104	151	A4/20	A4/12
11.00-20	16	8.0	TT/TL	305	12.0	1082	42.6	4375	9625	7.2	104	159	A4/20	A4/12
	18							4625	10175	8.1	118	161	A4/20	A4/12
	20							6150	13530	9.2	133	171	A2/10	A2/06



MPT-007

MULTI PURPOSE TRUCK TYRES

- Tyres for multi purpose trucks, designed for use on highways, off-the-road and agriculture applications. Specially engineered tread pattern offers maximum flexibility.
- Good traction in all weather conditions.
- Good on-the-road drive ability and self cleaning properties.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
10.0/75-15.3	10	9.0	TL	259	10.2	775	30.5	356	14.0	2311	91.0	1550	3410	3.8	55	123	A8/40	A8/25
	12											1700	3740	4.6	67	126	A8/40	A8/25
	14											1900	4180	5.4	78	130	A8/40	A8/25
	18											2200	4840	6.9	100	135	A8/40	A8/25
11.5/80-15.3	10	9.0	TL	292	11.5	869	34.2	381	15.0	2564	101.9	1950	4290	3.3	48	131	A8/40	A8/25
	14											2430	5345	4.6	67	139	A8/40	A8/25
	18											2725	5995	5.9	85	143	A8/40	A8/25
10.5-18	10	9.0	TL	269	10.6	904	35.6	406	16.0	2692	106.0	1750	3850	3.7	53	127	A8/40	A8/25
	12											2180	4796	4.4	64	135	A8/40	A8/25
12.5-18	10	11.0	TL	325	12.8	991	39.0	457	18.0	2946	116.0	2060	4532	2.9	42	133	A8/40	A8/25
	12											2240	4930	3.4	50	136	A8/40	A8/25
	14											2430	5345	3.8	55	139	A8/40	A8/25
18-19.5	16	14.0	TL	460	18.1	1105	43.5	508	20.0	3277	129.0	4750	10450	5.9	85	162	A8/40	A8/25
	18											5450	11990	7.0	102	167	A8/40	A8/25
10.5-20	10	9.0	TL	269	10.6	955	37.6	457	18.0	2870	113.0	2060	4532	3.7	54	133	A8/40	A8/25
12.5-20	10	11.0	TL	325	12.8	1039	40.9	483	19.0	3099	122.0	2120	4665	2.9	42	134	A8/40	A8/25
	12											2300	5060	3.4	50	137	A8/40	A8/25
	16											2500	5500	3.6	52	140	A8/40	A8/25
	18											2725	5995	3.8	55	143	A8/40	A8/25
14.5-20	10	11.0	TL	361	14.2	1115	43.9	483	19.0	3302	130.0	2300	5060	2.5	36	137	A8/40	A8/25
	12											2500	5500	2.8	40	140	A8/40	A8/25
	14											2800	6160	3.4	50	144	A8/40	A8/25
	18											3150	6930	4.4	64	148	A8/40	A8/25



GRIPMAX

MULTI PURPOSE TRUCK TYRES

- Tyres for multi purpose trucks, designed for use on highways, off-the-road and agriculture applications. Specially engineered tread pattern offers maximum flexibility.
- Good traction in all weather conditions.
- Good on-the-road drive ability and self cleaning properties.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
16.0/70-24	14	13.0	TL	404	15.9	1184	46.6	356	14.0	3530	139.0	3550	7810	3.5	50	153	B/50	B/30



LIFTPOWER

INDUSTRIAL FORKLIFT TYRES

- Unique lug design for extra surface for highest mileage.
- Cut and crack resistant tread compound.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
23x5	10	4.0	TT	155	6.1	635	25.0	2000	4400	8.0	114	132	A6/30	A6/20



LIFTKING HD

INDUSTRIAL FORKLIFT TYRES

- Premium tyre, designed for heavy duty service on forklift trucks, material handling and mining equipment.
- The deep tread, extra thick sidewalls and tough casing provide exceptional durability and minimize the risk of puncture and accidental damages.
- Silica and natural rubber in tread compound provides greater chip and rear resistance.
- Specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
4.80/4.00-8	8	3.0	TT	117	4.6	414	16.3	530	1165	10.0	145	86	A6/30	A6/20
5.70/5.00-8	10	3.0	TT	132	5.2	467	18.3	1400	3080	9.8	142	120	A6/30	A6/20
6.90/6.00-9	10	4.0	TT	160	6.3	540	21.2	1700	3740	8.3	120	126	A6/30	A6/20
6.50-10	12	5.0	TT	178	7.0	588	23.1	2180	4796	8.8	128	135	A6/30	A6/20
7.00-12	14	5.0	TT	192	7.6	690	27.1	2725	5995	8.9	128	143	A6/30	A6/20
7.00-15	12	5.5	TT	201	7.9	762	30.0	3075	6765	8.6	125	147	A6/30	A6/20
7.50-15	14	6.0	TT	211	8.3	772	28.3	3000	6600	9.0	130	146	A6/30	A6/20
28x9-15	14	7.0	TT	213	8.4	720	33.7	3875	8525	9.8	142	155	A6/30	A6/20
8.25-15	16	6.5	TT	239	9.4	855	33.6	3550	7810	9.1	131	152	A6/30	A6/20



ROCK PLUS HD

INDUSTRIAL FORKLIFT TYRES

- Deep tread, extra thick sidewall and tough casing ensure longer life. Silica and natural rubber base compound provides greater chip and tear resistance.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
250-15	20	7.0/7.5	TT	240	9.4	735	28.9	3875	8525	10.0	145	155	A6/30	A6/20
300-15	20	8.0	TT	300	11.8	840	33.1	5000	11000	9.0	128	164	A6/30	A6/20
10.00-20	18	7.5	TT	284	11.2	1080	42.5	6500	14300	8.3	120	173	A8/40	A8/25
12.00-20	20	8.5	TT	320	12.6	1151	45.3	7750	17050	9.0	130	179	A6/30	A6/20



SOL-X

NON MARKING TYRES

- Long tyre life with consistent performance.
- Low heat build-up and rolling resistance .
- Perfect driving comfort.

SIZE	TYPE	Rim Width		Section Width		Overall Diameter		Load Capacity			
		Inch	mm	inch	mm	inch	Load Wheel		Steer Wheel		
							kg	lbs	kg	lbs	
4.00-8	STD/LIP	3.0	406	16.0	99	3.9	950	2090	730	1606	
144/55.9	STD/LIP	3.25	114	4.5	400	15.7	950	2090	825	1815	
5.00-8	STD/LIP	3.0	455	17.9	124	4.9	1420	3124	1090	2398	
15x4 1/2-8	STD/LIP	3.0	386	15.2	163	4.5	1040	2288	800	1760	
16x6-8	STD/LIP	4.3	406	16.0	150	6.4	1495	3289	1150	2530	
16x6-8	STD/LIP	4.3	152	6.0	406	16.0	1270	2794	975	2145	
18x7-8	STD/LIP	4.3	457	18.0	142	5.9	2145	4719	1650	3630	
6.00-9	STD/LIP	4.0	523	20.6	142	5.6	1885	4147	1450	3190	
140/55-9	STD/LIP	4.0	391	15.4	114	5.6	1170	2574	900	1980	
21x8-9	STD/LIP	6.0	526	20.7	193	7.6	2755	6061	2120	4664	
6.50-10	STD/LIP	5.0	577	22.7	160	6.3	2340	5148	1800	3960	
7.50-10	STD/LIP	6.5	653	25.7	180	7.1	3070	6754	2360	5192	
200x50-10	STD/LIP	6.5	452	17.8	188	7.4	2470	5434	1900	4180	
200x50-10	STD/LIP	6.5	457	18.0	184	7.25	2470	5434	1900	4180	
23x9-10	STD/LIP	5.0	572	22.5	211	8.3	3445	7579	2650	5830	
23x9-10	STD/LIP	6.5	229	9.0	584	23.0	3160	6952	2430	5346	
7.00-12	STD/LIP	5.5	645	25.4	175	6.9	2920	6424	2240	4928	
23x10-12	STD/LIP	8.0	592	23.3	245	9.7	3770	8294	2900	6380	
23x10-12	STD/LIP	2.75	140	5.50	245	9.7	3160	6952	2430	5346	
7.00-12	STD/LIP	5.5	177	6.97	688	27.1	2455	5401	1820	4004	
27x10-12	STD/LIP	8.0	650	25.6	249	9.8	3900	8580	3000	6600	
6.00-15	STD/LIP	6.5	159	6.25	688	27.1	3545	7799	2725	5995	
7.00-15	STD/LIP	5.5	701	27.6	191	7.5	3545	7799	2725	5995	
7.50-15	STD/LIP	5.5	719	28.3	191	7.5	3900	8580	3000	6600	
250-15	STD/LIP	7.0	734	28.9	236	9.3	4750	10450	3650	8030	
8.15-15	STD/LIP	7.0	688	27.1	213	8.4	3445	7579	2650	5830	
8.25-15	STD/LIP	6.5	780	30.7	201	7.9	4750	10450	3650	8030	
8.25-15	STD/LIP	6.5	224	8.8	841	33.1	4750	10450	3650	8030	

SIZE	TYPE	Rim Width	Section Width		Overall Diameter		Load Capacity			
			Inch	mm	inch	mm	inch	Load Wheel		Steer Wheel
							kg	lbs	kg	lbs
300-15	STD/LIP	8.0	820	32.3	257	10.1	5850	12870	4500	9900
300-15	STD/LIP	8.0	268	10.5	815	32.1	5735	12617	4333	9533
28x12.5-15	STD/LIP	9.7	688	27.1	315	12.4	5525	12155	4250	9350
355/65-15	STD/LIP	9.7	820	32.3	300	11.8	7800	17160	6000	13200
7.50-16	STD/LIP	5.5	782	30.8	201	7.9	3908	8598	2831	6228
8.00-16	STD/LIP	UNDER DEVELOPMENT								
7.50-20	STD/LIP	6.0	883	34.7	179	7.1	3840	8448	3200	7040
8.25-20	STD/LIP	7.0	988	38.9	231	9.1	4400	9680	3675	8085
9.00-20	STD/LIP	UNDER DEVELOPMENT								
9.00-20	STD/LIP	7.0	241	9.5	1019	40.1	6025	13255	5233	11513
9.00-20	STD/LIP	7.0	1026	40.4	241	9.5	5340	11748	4450	9790
9.00-20	STD/LIP	7.5	1026	40.4	241	9.5	5340	11748	4450	9790
10.00-20	STD/LIP	7.5	1026	40.4	241	9.5	6000	13200	5000	11000
10.00-20	STD/LIP	7.5	257	10.1	1019	40.1	6025	13255	5233	11513
10.00-20	STD/LIP	8.0	1026	40.4	241	9.5	6000	13200	5000	11000
11.00-20	STD/LIP	8.0	1052	41.4	263	10.4	6510	14322	5245	11540
12.00-20	STD/LIP	8.5	1102	43.4	295	11.6	7500	16500	6250	13750
12.00-20	STD/LIP	UNDER DEVELOPMENT								
12.00-24	STD/LIP	8.5	1194	47.0	300	11.8	8000	17600	6650	14630
12.00-24	STD/LIP	10.0	1194	47.0	300	11.8	8000	17600	6650	14630
14.00-24	STD/LIP	10.0	1300	51.2	335	13.2	11000	24200	9175	20185



PB-999

PRESS ON BAND

- Long tyre life with consistent performance.
- Low heat build-up and rolling resistance .
- Perfect driving comfort.

SIZE	TYPE	Load Capacity			
		Load Wheel		Steer Wheel	
		kg	lbs	kg	lbs
10x4x6-1/4	STD/LIP	780	1720	640	1408
10x5x6-1/4	STD/LIP	1030	2270	840	1848
10x6x6-1/4	STD/LIP	1270	2800	1040	2288
15x5x5	STD/LIP	1640	3615	1350	2970
16x5x10-1/2	STD/LIP	1510	3322	1240	2728
16x6x10-1/2	STD/LIP	1910	4202	1570	3454
16-1/4x5x11-1/4	STD/LIP	1530	3366	1250	2750
16-1/4x6x11-1/4	STD/LIP	1920	4224	1580	3476
17-1/4x5x11-1/4	STD/LIP	1710	3762	1400	3080
18x5x12-1/8	STD/LIP	1640	3608	1350	2970
18x6x12-1/8	STD/LIP	2100	4620	1720	3784
18x7x12-1/8	STD/LIP	2550	5610	2100	4620
18x8x12-1/8	STD/LIP	3000	6600	2475	5445
18x9x12-1/8	STD/LIP	3450	7590	2850	6270
21x5x15	STD/LIP	1910	4202	1490	3278
21x6x15	STD/LIP	2400	5780	1980	4356
21x7x15	STD/LIP	2875	6325	2350	5170
21x8x15	STD/LIP	2975	6545	2475	5445
21x9x15	STD/LIP	3900	8580	3205	7051
22x6x16	STD/LIP	2450	5390	2000	4400
22x7x16	STD/LIP	2975	6545	2450	5390
22x8x16	STD/LIP	3500	7700	2875	6325
22x9x16	STD/LIP	4050	8910	3325	7315
22x6x17-3/4	STD/LIP	2550	5610	2220	4884
26x6x20	STD/LIP	2750	6050	2240	4928
26x7x20	STD/LIP	3390	7458	2775	6105




AP-555

APERTURE TYRES

- Long tyre life with consistent performance.
- Low heat build-up and rolling resistance .
- Perfect driving comfort.

SIZE	TYPE	Rim Width	Section Width		Overall Diameter		Load Capacity			
			Load Wheel		Steer Wheel					
		Inch	mm	inch	mm	inch	kg	lbs	kg	lbs
18x5.008	STD/LIP	8.0	118	4.6	460	18.2	1415	3113	1090	2398
18x7.008	STD/LIP	8.0	160	6.3	455	17.9	2145	4719	1650	3630
6.00-9	STD/LIP	9.0	135	5.3	520	20.5	1885	4147	1450	3190
6.50-10	STD/LIP	10.0	158	6.2	575	22.7	2340	5148	1800	3960
7.00-12	STD/LIP	12.0	170	6.7	660	26.0	2920	6424	2240	4928
28x12.50-15	STD/LIP	15.0	296	11.6	300	11.8	5690	12518	4375	9625
28x9.00-15	STD/LIP	15.0	216	8.5	300	11.8	3900	8580	3000	6600


READING SIZES

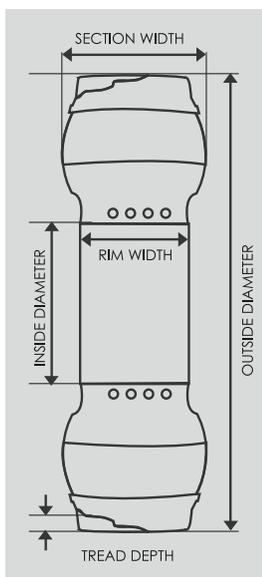


Resilient and Press-on sizes are represented in different nomenclature.

Rim width is always shown separately. All Dimensions are nominal.


7 x 12 / 5 (Resilient)



12 x 4 4 / 12.5 (Resilient)

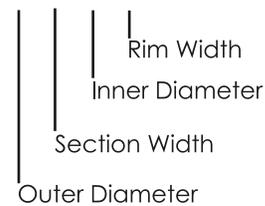

7 x 12 / 5 (Resilient)

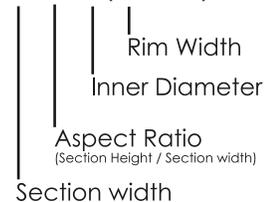


16 x 5 x 10 1/2 (Resilient)




Measurements unspecified above are in Inches

WHEEL RIM TYPES

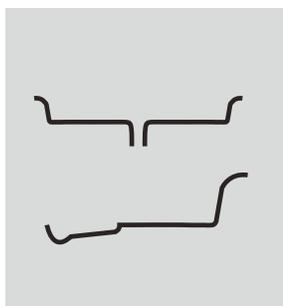

Two piece Split rim

Taper - Base rim for Lip tyre

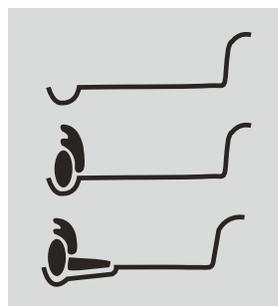


Flat based rim for Lip tyre

Three piece rim - End ring, Lock ring

Four piece taper - Base Rim - End ring, Lock ring, Band

LIP TYRES

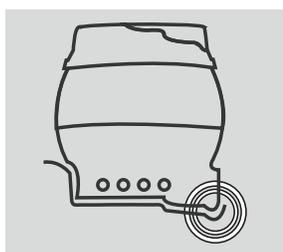

Lip tyre also called Click, Clip or Easy fit tyre eliminates the usage of end ring and lock ring. Lip tyre base is profiled for firm seating on the circumferential ridge of the rim. Lip and regular base tyre are not inter changeable.

RECOMMENDATIONS

- All tyre specifications are in accordance with the nominal dimensions of T&RA /ETRTO International Standards
- International standards recommend the maximum speed of 25KMPH for forklift trucks and a maximum distance coverage of 2 Kms at a stretch and tyres are designed to conform to these requirements
- International standards specify the nominal overall dia and section width(maximum) of the tyre with corresponding Load rating at differential speeds for varying applications
- The speeds given are the maximum speed in unloaded condition. Higher load at lower speed is not permissible
- Wheel rims to be checked for its correctness of its dimension, profile, load, compatibility with the tyre
- Wheel rims to be checked for Its suitability of usage – bereft of cracks, damages, presence of foreign materials to ensure safe operations
- Tyres to be fitted using proper fitment gadgets
- Strict adherence to fitment procedures to be followed for easy, safe and secure fitment
- Tyres should be stored in Dry, Ventilated & Clean conditions
- Exposure to oil / lubricants & Electric currents to be avoided

TRUCK TYRES





MILESTONE

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Better traction and good braking performance.
- Ensures even wear.
- Low heat generation.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
LT205/90D15 (7.00-15E)	10	5.5	TL	206	8.1	770	30.3	1180	2600	4.5	65	114	P/150	P/94
LT225/90D16 (7.50-16E)	10	6.0	TL	218	8.6	823	32.4	1590	3500	5.5	80	124	P/150	P/94



MILEAGE MAKER

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Balanced rib type design.
- Excellent retreadability.
- Ensures even wear.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
7.00-15	12	5.5	TT	206	8.1	770	30.3	1180	2596	6.2	90	114	J/100	J/60
9.00-20	14	7.0	TT	259	10.2	1025	40.3	2575	5665	7.6	110	141	J/100	J/60



MILESTONE

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Even tread wear and superior mileage.
- Wet rolling resistant and good road grip.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
6.40-15	8	4.0	TT	160	6.3	693	27.3	710	1562	4.2	60	96	J/100	J/60
	10							825	1815	5.4	77	101	J/100	J/60
6.70-15	8	4.5	TT	165	6.5	710	28.0	825	1815	4.2	60	101	J/100	J/60
	10							925	2035	5.4	77	105	J/100	J/60
7.00-15	12	5.5	TT	206	8.1	770	30.3	1180	2596	6.2	90	114	J/100	J/60
7.50-15	12	6.0	TT	216	8.5	780	30.7	1360	2990	5.5	80	119	J/100	J/60
	14							1450	3190	6.2	90	121	J/100	J/60
7.00-16	10	5.5	TT	206	8.1	785	30.9	1090	2398	5.1	73	111	J/100	J/60
	12							1215	2675	6.2	90	115	J/100	J/60
7.50-16	12	6.0	TT	218	8.6	823	32.4	1400	3080	6.2	90	120	J/100	J/60
	14							1500	3300	6.9	100	122	J/100	J/60
8.25-16	14	6.5	TT	231	9.1	841	33.1	1800	3960	6.9	100	128	J/100	J/60
	16							1850	4070	7.6	110	129	J/100	J/60
10.00-20	16	7.5	TT	274	10.8	1060	41.7	3000	6600	7.9	115	146	J/100	J/60
11.00-20	16	8.0	TT	290	11.4	1082	42.6	3250	7150	7.9	115	149	J/100	J/60



MAX RIB

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Unique tread design.
- High fuel efficiency.
- Low heat generation.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
10.00-20	16	7.5	TT	274	10.8	1060	41.7	3000	6600	7.9	115	146	J/100	J/60



HUNTER

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Strong casing.
- Ensures even wear.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
5.60-14	10	4.0	TT	145	5.7	640	25.2	580	1276	4.3	61	89	J/100	J/60



SILVERSTONE

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Irregular wear resistant.
- Better tyre life and fuel efficiency.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
6.00-16	10	4.5	TT	174	6.9	752	29.6	875	1925	5.1	73	103	J/100	J/60
6.50-16	12	4.5	TT	185	7.3	765	30.1	1030	2266	4.7	68	109	J/100	J/60



TIGER

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Longer tyre life thanks to better tread contact area.
- High load carrying capacity.
- Low heat generation.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
7.00-15	12	5.5	TT	206	8.1	770	30.3	1180	2596	6.2	90	114	J/100	J/60
10.00-20	18	7.5	TT	274	10.8	1075	42.3	3075	6765	8.3	120	147	J/100	J/60



GTSW

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Unique design with high mileage.
- Better air circulation and faster heat dissipation.
- High fuel efficiency.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
7.50-16	16	6.0	TT	218	8.6	823	32.4	1600	3520	7.6	110	124	J/100	J/60
	18							1650	3630	7.9	115	125	J/100	J/60
8.25-16	14	6.5	TT	231	9.1	841	33.1	1800	3960	6.9	100	128	J/100	J/60
	16							1850	4070	7.6	110	129	J/100	J/60



LOAD KING+

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Longer life with stable performance.
- High load carrying capacity.
- Strong casing.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
7.50-16	16	6.0	TT	218	8.6	823	32.4	1600	3520	7.6	110	124	J/100	J/60
	18							1650	3630	7.9	115		125	J/100



LOAD KING

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Designed for durability and performance.
- Strong casing.
- Higher skid depth.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
7.50-16	16	6.0	TT	218	8.6	823	32.4	1600	3520	7.6	110	124	J/100	J/60
	18							1650	3630	7.9	115		125	J/100
8.25-16	16	6.5	TT	231	9.1	841	33.1	1850	4070	7.6	110	129	J/100	J/60
	18							1900	4180	7.9	115		130	J/100
9.00-20	16	7.0	TT	259	10.2	1035	40.7	2650	5830	7.9	115	142	J/100	J/60
	18							2725	5995	8.2	119		143	J/100



SAND GRIP

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Superior tread and shoulder design.
- Better tyre life and uniform wear
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
7.50-16	16	6.0	TT	218	8.6	823	32.4	1600	3520	7.6	110	124	J/100	J/60
	18							1650	3630	7.9	115		125	J/100
12.00-20	18	8.5	TT	320	12.6	1138	44.8	3250	7150	7.3	105	149	G/90	G/56



LOAD POWER

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Premium compound helps in reducing heat generation.
- Better tyre life and fuel efficiency.
- Irregular wear resistant.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
12.00-24	18	8.5	TT	315	12.3	1240	48.8	4250	9350	7.9	115	158	J/100	J/60



LOAD RUNNER

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Longer life with stable performance.
- High load carrying capacity.
- Strong casing.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
9.00-16	16	6.5	TT	254	10.0	914	36.0	2120	4664	7.2	105	134	J/100	J/60
	18							2360	5190	7.6	110		148	A8/40
10.00-20	16	7.5	TT	274	10.8	1075	42.3	3000	6600	7.9	115	146	J/100	J/60
	18							3075	6765	8.3	120		147	J/100



SAMRAT+

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Longer life and stable performance.
- Better air circulation and faster heat dissipation.
- High load carrying capacity.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
9.00-16	16	6.5	TT	254	10.0	914	36.0	2120	4664	7.2	105	134	J/100	J/60
	18							2475	6600	7.2	105		140	J/100



TOUGH TRACK PLUS

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Unique tread design.
- High fuel efficiency.
- Low heat generation.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
6.00-16	10	4.0	TT	174	6.9	752	29.6	875	1925	5.1	73	103	J/100	J/60



LOAD-X

TRUCK & LIGHT TRUCK TYRES (DOT / ECE)

- Unique tread design.
- High fuel efficiency.
- Low heat generation.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
5.00-12	10	3.5	TT	142	5.6	564	22.3	500	1100	4.3	61	84	L/120	L/75



RANGER

TRAILER TYRES (DOT / ECE)

- Irregular wear resistant.
- Wet rolling resistant.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
4.50-10	8	3.5	TT	132	5.2	490	19.3	520	1145	5.0	72	86	F/80	F/50
	10	3.5	TT	125	4.9	490	19.3	560	1232	5.0	73	88	F/80	F/50
5.00-10	8	3.5	TT	135	5.3	510	20.0	580	1276	5.0	72	89	F/80	F/50
	10	3.5	TT	155	6.1	531	20.9	615	1353	5.1	73	91	F/80	F/50
145-10	8	3.5	TT	140	5.5	500	19.7	500	1100	4.5	65	84	F/80	F/50
4.50-12	8	3.0	TT	127	5.0	544	21.4	290	640	2.4	35	65	L/120	L/75
	10	3.0	TT	127	5.0	544	21.4	325	715	2.8	40	69	L/120	L/75
4.80-12	6	3.8	TT	127	5.0	526	20.7	450	990	6.3	89	80	L/120	L/75
5.00-12	10	3.5	TT	142	5.6	564	22.3	500	1100	4.3	61	84	L/120	L/75



STORM

TRAILER TYRES (DOT / ECE)

- Balanced rib type design.
- Excellent traction and braking.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
6.00-14	8	4.5	TT	170	6.7	681	26.8	690	1818	4.3	61	95	J/100	J/60
	10							800	1760	5.0	72	100	J/100	J/60
6.50-14	8	4.5	TT	180	7.1	704	27.7	850	1870	4.3	62	102	J/100	J/60
	10							925	2035	4.5	65	105	J/100	J/60
E78-14	6	5.5	TT	188	7.4	656	25.8	620	1364	2.2	31	91	A8/40	A8/25
175D-14	6	5.0	TT	178	7.0	656	25.8	615	1353	3.1	41	91	A8/40	A8/25



SULTAN

TRAILER TYRES (DOT / ECE)

- Strong casing.
- High fuel efficiency.
- Good road grip.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
4.80-8	6	3.8	TT	122	4.8	420	16.5	335	737	6.3	89	70	F/80	F/50
5.70-8	8	4.5	TT	150	5.9	467	18.3	488	1074	7.1	100	83	F/80	F/50



IAP

TRAILER TYRES (DOT / ECE)

- Even tread wear and superior mileage.
- Longer life with stable performance.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
7.50-10	10	5.5	TT	206	8.1	645	25.3	1360	2992	6.2	90	119	A8/40	A8/25
8.25-10	12	6.0	TT	211	8.3	675	26.5	1650	3630	7.2	105	125	A8/40	A8/25



MILESTONE +

TRAILER TYRES (DOT / ECE)

- Even tread wear and superior mileage.
- Wet rolling resistant and good road grip.
- Excellent traction and braking.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
5.30-12	6	4.3	TT	135	5.3	550	21.6	475	1045	5.6	79	82	L/120	L/75
5.65-12	4	4.0	TT	140	5.5	520	20.5	250	550	1.7	24	60	L/120	L/75
145D-12	8	4.0	TT	140	5.5	540	21.2	375	825	2.3	32	74	L/120	L/75
155D-12	8	4.5	TT	155	6.1	558	22.0	560	1230	3.6	51	82	K/110	K/68
	10	4.5	TT	155	6.1	558	22.0	625	1375	6.3	89	92	K/110	K/68
5.90-15	8	4.0	TT	150	5.9	670	26.4	460	1012	2.0	28	81	A8/40	A8/25
195/80D-15	8	5.5	TT	195	10.0	697	27.4	775	1705	4.2	60	99	A8/40	A8/25



DUST STORM

TRAILER TYRES (DOT / ECE)

- Even tread wear and superior mileage.
- Longer life with stable performance.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
9.00-15	8	6.5	TT	254	10.0	865	34.0	1100	2420	3.5	50	112	A8/40	A8/25
9.00-16	8	6.5	TT	254	10.0	898	35.3	1210	2662	3.5	50	115	A8/40	A8/25



TRACKGRIP

TRAILER TYRES (DOT / ECE)

- High load carrying capacity.
- Irregular wear resistant.
- Low heat generation.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
215/75-17.5	12	6.8	TT	213	8.4	780	30.7	2120	4664	7.0	100	134	A8/40	A8/25
	16	6.8	TT	213	8.4	780	30.7	2650	5830	9.0	128	142	A8/40	A8/25
225/75-17.5	16	6.8	TT	224	8.8	795	31.3	2900	6380	9.0	128	145	A8/40	A8/25
235/75-17.5	16	6.8	TT	236	9.3	810	31.9	3400	7480	9.0	128	151	A8/40	A8/25



MILLENNIUM

TRAILER / JEEP TYRES (DOT / ECE)

- Reinforced sidewalls to enhance protection against impacts and cuts from obstacles and debris.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
F78-15	6	5.5	TT	198	7.8	694	27.3	760	1672	3.5	50	98	A8/40	A8/25



LANDMARK

VINTAGE VEHICLE TYRES (DOT / ECE)

- Built to last and provide long service life.
- Irregular wear resistant.
- Ensure even wear.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
5.60-13	6	4.0	TT	155	6.1	595	23.4	385	847	2.8	40	75	A8/40	A8/25
165D-13	6	4.5	TT	165	6.5	596	23.5	475	1045	2.8	40	82	A8/40	A8/25



SAMRAT

VINTAGE VEHICLE TYRES (DOT / ECE)

- Built to withstand rough terrain, heavy loads and harsh conditions.
- Better tyre life and fuel saving.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
5.00-19	6	3.0	TT	135	5.3	746	29.3	670	1474	3.8	54	94	A8/40	A8/25
6.00-19	8	3.6	TT	160	6.3	800	31.5	925	2035	4.2	60	105	A8/40	A8/25
7.00-19	10	5.0	TT	193	7.6	860	33.8	1360	2992	5.2	74	119	A8/40	A8/25
	12							1450	3190	5.4	76	121	A8/40	A8/25
8.00-19	10	5.0	TT	221	8.7	910	35.8	1650	3630	5.2	74	125	A8/40	A8/25



MILITARY

MILITARY JEEP OFFROAD (DOT / ECE) 4x4 TYRES

- Excellent for ON/OFF Road applications and ensures good all-round performance as well as good traction and durability in ON/OFF Road applications.
- Each tyre features bias belted construction for superior strength and impact resistance, these tyres are built to handle the toughest Off-Road conditions on the planet.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
6.00-16	8	4.5	TT	168	6.6	752	29.6	330	13.0	2184	86.0	690	1518	4.2	60	95	G/90	G/56
7.00-16	8	5.5	TT	196	7.7	785	30.9	366	14.4	2362	93.0	975	2145	3.8	40	107	G/90	G/56
7.50-16	8	6.0	TT	221	8.7	825	32.5	374	14.7	2393	94.2	1090	2376	4.2	61	111	G/90	G/56
	1250											2750	6.2	90	116	G/90	G/56	
9.00-16	8	6.5	TT	244	9.6	905	35.6	424	16.7	2768	109.0	1360	2990	3.4	50	119	G/90	G/56
	14											1650	3630	6.2	90	125	G/90	G/56
8.25-20	10	6.0	TT	234	9.2	925	36.4	389	15.3	2483	97.8	1600	3520	5.1	73	124	G/90	G/56
7.50-20	8	6.0	TT	208	8.2	930	36.6	432	17.0	2692	106.0	1450	3190	5.0	72	121	G/90	G/56
	14											1775	3905	7.3	105	128	G/90	G/56
9.00-20	12	7.5	TT	259	10.2	1034	40.7	483	19.0	3124	123.0	2060	4532	6.0	85	133	G/90	G/56
10.00-20	12	7.5	TT	284	11.2	1080	42.5	508	20.0	3175	125.0	2180	4790	5.1	73	135	G/90	G/56
12.00-20	18	8.5	TT	320	12.6	1138	44.8	524	20.6	3360	132.3	3250	7150	7.3	105	149	G/90	G/56
12.00-24	UNDER DEVELOPMENT																	
14.00-24	16	10.0	TT	375	14.8	1350	53.1	610	24.0	4013	158.0	3650	8030	3.8	54	153	A8/40	A8/25



GTSW

MILITARY JEEP OFFROAD (DOT / ECE) 4x4 TYRES

- Aggressive tread pattern provides maximum traction on various terrains.
- Reinforced sidewalls to enhance protection against impacts and cuts from obstacles and debris.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
7.50-16	8	6.0	TT	218	8.6	823	32.4	374	14.7	2393	94.2	1120	2664	4.2	60	112	G/90	G/56



SAND GRIP

MILITARY JEEP OFFROAD (DOT / ECE) 4x4 TYRES

- Built to withstand rough terrain, heavy loads and harsh conditions.
- Typically constructed with high strength materials to resist punctures, tears and damage.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
7.50-16	12	6.0	TT	221	8.7	825	32.5	374	14.7	2393	94.2	1180	2596	5.1	73	114	B/50	B/30
12.00-20	18	8.5	TT	320	12.6	1138	44.8	524	20.6	3360	132.3	3250	7150	7.3	105	149	G/90	G/56



ML-999

MILITARY JEEP OFFROAD (DOT / ECE) 4x4 TYRES

- Built to last and provide long service life.
- Designed for all season use providing excellent performance in various weather conditions.
- Excellent retreadability.

SIZE	Ply Rating	Rim Width Inch	TYPE	Section Width		Overall Diameter		Static Loaded Radius		Rolling Circumference ± 2.5 %		Load Capacity		Inflation Pressure		Load Index	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
145-12M	4	4.0	TT	145	5.7	561	22.1	260	10.2	1646	65.0	400	880	3.7	45	76	E/70	E/44

 **MICO**

TWO WHEELER TYRES

MICO

A large, stylized MICO motorcycle tyre is shown in a perspective view, framing a central scene. The tyre's tread pattern is clearly visible. Inside the tyre's opening, a person wearing a dark jacket with a logo on the back is riding a motorcycle away from the viewer on a paved road. The scene is set at sunset or sunrise, with a bright, hazy sky and a body of water in the distance. The overall composition is circular and emphasizes the brand's focus on two-wheeler tyres.



MF-101

- Tread design having wide channel grooves to enhance the safety
- Superior compound to ensures high mileage



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
2.50-16	6	41L	70	2.8	554	21.9	Tubetype
2.50-17	6	43L	70	2.8	580	22.9	Tubeless
2.75-17	6	49P	80	3.1	599	23.5	Tubeless
2.50-18	6	45J	70	2.8	605	23.9	Tubeless
2.75-18	6	50P	80	3.1	624	24.5	Tubetype / Tubeless
3.00-18	6	52P	86	3.3	639	25.1	Tubeless



F-101

- Designed for high stability and ride comfort
- Excellent Mileage with Superior compound technology
- Well-balanced tread design for highest traction compatibilities



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
2.75-17	6	49P	80	3.1	599	23.5	Tubetype
3.00-17	6	50P	86	3.3	614	24.1	Tubetype
2.75-18	6	50P	80	3.1	624	24.5	Tubetype
3.00-18	6	52P	86	3.3	639	25.1	Tubetype



F-1

- Optimize stability and improve the mileage
- Superior compound to ensure high mileage
- Excellent handling at high speed



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
2.75-17	6	49P	80	3.1	599	23.6	Tubeless
80/100-17	-	46P	86	3.4	603	23.7	Tubeless
90/90-17	-	49P	96	3.8	605	23.8	Tubeless
3.00-17	6	50P	86	3.4	614	24.2	Tubeless
2.75-18	6	50P	80	3.1	624	24.5	Tubeless
80/100-18	-	47P	86	3.4	626	24.6	Tubeless
90/90-18	-	51P	96	3.8	630	24.8	Tubeless



FR-X

- Superior tread compound to ensure high mileage
- Puncture resistance
- Excellent traction in all weather conditions



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
2.75-17	6	-	80	3.1	599	23.5	Tubeless
3.00-17	6	-	86	3.3	614	24.1	Tubeless
100/90-17	-	55P	108	4.2	624	24.6	Tubeless
2.75-18	6	-	80	3.1	624	24.5	Tubeless
3.00-18	6	-	86	3.3	639	25.1	Tubeless
100/90-18	-	56P	108	4.2	650	26.0	Tubeless



FR-1

- Superior tread compound to ensure high mileage
- Puncture resistance
- Excellent traction in all weather conditions



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
130/70-17	-	62P	138	5.4	623	24.5	Tubeless



F-3

- High speed performance tyre
- Immaculate/ perfect grip
- Provides maximum traction and increased safety at high lean angles



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
140/70-17	-	66P	149	5.9	639	25.2	Tubeless
150/70-17	-	69P	162	6.4	653	25.7	Tubeless



SW-33

- Immaculate grip
- Excellent handling at high speed
- Puncture resistance



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
90/100-10	-	53J	90	3.5	434	17.1	Tubeless
3.00-10	4	42J	80	3.1	413	16.3	Tubeless
90/90-12	-	54J	90	3.5	467	18.4	Tubeless
2.50-16	6	41L	65	2.6	542	21.3	Tubeless
3.00-17	6	50P	80	3.1	602	23.7	Tubeless
2.75-18	6	50P	75	2.9	613	24.1	Tubeless
3.00-18	6	52P	80	3.1	627	24.7	Tubeless
3.50-19	6	63L	93	3.7	675	26.6	Tubeless



SW-555

- Suitable for all road conditions
- Best performance-oriented tread pattern
- Ensures better road grip and drive comfort



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.00-17	6	50P	86	3.3	614	24.1	Tubetype
3.00-18	6	52P	86	3.3	639	25.1	Tubetype



B-1

- Comfortable ride for all terrain
- Puncture resistance
- Specially designed to cater the needs of riders



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
100/90-17	-	55P	108	4.2	624	24.6	Tubeless
3.00-17	6	50P	86	3.4	614	24.2	Tubeless
2.75-18	6	50P	80	3.1	624	24.5	Tubeless
3.00-18	6	52P	86	3.4	639	25.1	Tubeless
100/90-18	-	56P	108	4.2	650	26.0	Tubeless



B-3

- Excellent grip on both wet & dry surfaces
- Tread designed for better comfort ride
- Low rolling resistance helps in improving fuel efficiency



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
110/90-16	-	59P	117	4.6	615	24.2	Tubeless
110/90-17	-	60P	117	4.6	641	25.2	Tubeless
3.25-18	6	59R	95	3.7	652	25.7	Tubeless
3.50-18	6	62R	100	3.9	662	26.1	Tubeless



B-5

- Higher stability and comfortable ride
- Excellent mileage with superior compound technology



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
2.75-18	6	50P	80	3.1	624	24.5	Tubeless
3.00-18	6	52P	86	3.4	639	25.1	Tubeless



B-7

- Best performance-oriented tread pattern
- Excellent handling at high speed
- Specially designed to cater the needs of riders



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
110/90-16	-	59P	117	4.6	615	24.2	Tubeless



COBRA

- Dynamic design offers greatest degree of agility while driving
- Enhanced safety and grip on both wet / dry roads



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.00-17	6	50P	86	3.4	614	24.1	Tubeless
100/90-17	-	55P	108	4.2	624	24.6	Tubeless
120/80-17	-	67P	127	5.0	635	25.0	Tubeless
2.75-18	6	50P	80	3.1	624	24.5	Tubeless
3.00-18	6	52P	86	3.3	639	25.1	Tubeless
100/90-18	-	56P	108	4.3	650	25.6	Tubeless



R-3

- Excellent road grip
- Superior tread to ensure high mileage
- Less rolling resistance for better fuel efficiency
- Puncture resistance



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.25-16	6	55P	95	3.8	601	23.7	Tubetype
2.75-18	6	50P	80	3.1	624	24.5	Tubetype
3.00-18	6	52P	86	3.3	639	25.1	Tubetype



R-5

- Comfortable ride for all terrain
- Offers better braking and high speed controls
- Puncture resistance



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.00-14	6	45L	86	3.3	538	21.2	Tubetype
3.00-17	6	50P	86	3.3	614	24.1	Tubeless
100/90-17	-	55P	108	4.3	624	24.6	Tubeless
2.75-18	6	50P	80	3.1	624	24.5	Tubeless
3.00-18	6	52P	86	3.3	639	25.1	Tubeless
100/90-18	-	56P	108	4.3	650	25.6	Tubeless
3.25-19	6	60P	95	3.8	678	26.7	Tubeless
3.50-19	6	63P	100	4.0	688	27.1	Tubetype



R-8

- Perfect grip for all weather conditions
- Highly versatile tyre, suitable for all terrains
- Puncture resistance



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.00-17	6	50P	86	3.3	614	24.1	Tubeless
2.75-18	6	50P	80	3.1	624	24.5	Tubeless
3.00-18	6	52P	86	3.3	639	25.1	Tubetype / Tubeless



R-7

- Immaculate grip
- Excellent handling at high speed
- Puncture resistance



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.00-17	6	50P	86	3.3	614	24.1	Tubeless
100/90-17	-	55P	108	4.3	624	24.6	Tubeless
2.75-18	6	50P	80	3.1	624	24.5	Tubeless
3.00-18	6	52P	86	3.3	639	25.1	Tubeless
100/90-18	-	56P	108	4.3	650	25.6	Tubeless



R-9

- Designed for both dry and wet roads
- Best performance-oriented tread pattern
- Capable of handling effectively even at unsurfaced routes



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.00-17	6	50P	86	3.3	614	24.1	Tubeless
2.75-18	6	50P	80	3.1	624	24.5	Tubeless
3.00-18	6	52P	86	3.3	639	25.1	Tubeless



FR-66

- Provides maximum traction & comfortable ride
- Superior grip on both paved and unpaved roads
- Best In class performance
- Excellent handling for unpleasant terrain



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
90/90-17	-	49P	88	3.4	591	23.3	Tubeless
3.00-17	6	50P	86	3.3	614	24.1	Tubeless
100/90-17	-	55P	108	4.3	624	24.6	Tubeless
110/80-17	-	57P	117	4.6	604	23.8	Tubeless
110/90-17	-	60P	115	4.5	625	24.6	Tubeless
3.00-18	6	52P	86	3.3	639	25.1	Tubeless
90/90-18	-	51P	88	3.4	615	24.2	Tubeless
100/90-18	-	56P	105	4.1	630	24.8	Tubeless
110/90-18	-	61P	115	4.5	650	25.6	Tubeless

MOTOCROSS TYRES (DOT / ECE)



MC-007

- Immaculate grip
- Excellent handling for your adventure
- Puncture resistance



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.00-17	6	50P	86	3.3	614	24.1	Tubeless
100/90-17	-	55P	108	4.3	624	24.6	Tubeless
3.00-18	6	52P	86	3.3	639	25.1	Tubeless
100/90-18	-	56P	105	4.1	630	24.8	Tubeless
110/100-18	-	64R	128	5.0	703	27.6	Tubeless
120/90-18	-	65R	134	5.3	699	27.5	Tubeless
140/80-18	-	70R	158	6.2	707	27.8	Tubeless
100/90-19	-	57R	125	4.9	685	26.9	Tubeless
110/90-19	-	62R	128	5.0	695	27.4	Tubeless
120/80-19	-	63R	153	6.0	699	27.5	Tubeless
90/90-21	-	54R	100	3.9	710	27.9	Tubeless
90/100-21	-	57R	115	4.5	735	28.9	Tubeless



FR-3

- Provides maximum traction & comfortable ride
- Superior grip on both paved and unpaved roads
- Best In class performance
- Excellent handling for unpleasant terrain



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.00-10	4	42J	80	3.1	413	16.3	Tubeless
3.50-10	4	51J	97	3.9	453	17.9	Tubeless
90/100-10	-	53J	96	3.8	444	17.5	Tubeless
110/70-12	-	47L	117	4.6	468	18.4	Tubeless
120/70-12	-	58P	131	5.2	483	19.0	Tubeless
130/70-12	-	62P	138	5.4	487	19.2	Tubeless
140/70-12	-	60P	150	5.9	507	20.0	Tubeless



SW-33

- Immaculate grip
- Excellent handling at high speed
- Puncture resistance



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
90/100-10	-	53J	90	3.5	434	17.1	Tubeless
3.00-10	4	42J	80	3.1	413	16.3	Tubeless
90/90-12	-	54J	90	3.5	467	18.4	Tubeless



CITY STAR

- Superior tread to ensure high mileage
- Ensures better road grip and drive comfort
- Suitable for all road conditions



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.00-12	4	47J	90	3.5	475	18.7	Tubetype
90/90-12	-	54J	96	3.8	478	18.8	Tubetype



R-5

- Comfortable ride for all terrain
- Offers better braking and high speed controls
- Puncture resistance



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.50-10	4	51J	97	3.9	453	17.9	Tubeless
90/100-10	-	53J	96	3.8	444	17.5	Tubeless



R-7

- Immaculate grip
- Excellent handling at high speed
- Puncture resistance



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.50-10	4	51J	97	3.9	453	17.9	Tubetype
90/100-10	-	53J	96	3.8	444	17.5	Tubeless



R-9

- Designed for both dry and wet roads
- Best performance-oriented tread pattern
- Capable of handling effectively even at unsurfaced routes



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
90/100-10	-	53J	96	3.8	444	17.5	Tubeless



AVANTI

- Perfect grip for all weather conditions.
- Highly versatile tyre, suitable for all terrains.
- Flawless stability at high speed with excellent cornering grip



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.50-10	4	51J	97	3.9	453	17.9	Tubetype



SW-101

- Immaculate grip
- Excellent handling at high speed
- Suitable for all road conditions



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.50-8	4	46J	97	3.9	402	15.9	Tubetype
3.50-10	4	51J	97	3.9	453	17.9	Tubetype



JZ-101

- Unique tread design for result oriented performance
- High mileage and higher tyre life
- Offers better braking and high speed controls



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
2.75-10	4	37J	37J	37J	37J	37J	Tubetype
3.00-10	4	42J	84	3.3	427	16.9	Tubetype



SW-601

- Excellent mileage with superior compound
- Best performance-oriented tread pattern
- Excellent drive comfort



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.50-10	4	51J	97	3.9	453	17.9	Tubetype



ER-007

- Crafted for superior performance
- Ensures better road grip and drive comfort
- Well-balanced tread design for safer and smoother ride



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.00-12	4	47J	90	3.5	475	18.7	Tubetype
3.75-12	6	66J	106	4.2	523	20.6	Tubetype
3.00-14	6	45L	86	3.3	538	21.2	Tubetype



ER-003

- Crafted for superior performance
- Ensures better road grip and drive comfort



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
3.75-12	6	66J	106	4.2	523	20.6	Tubetype



B-1

- Comfortable ride for all terrain
- Puncture resistance
- Specially designed to cater the needs of riders



SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
90/90-12	-	54J	96	3.8	478	18.8	Tubeless

 **MICO**



Three _____
WHEELER
_____ Tyres



S-101

- Puncture resistance
- Best performance-oriented tread pattern
- Low rolling resistance helps in improving fuel efficiency

SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
4.00-8	6	76E	120	4.7	434	17.1	Tubetype
4.00-8	8	76F	120	4.7	434	17.1	Tubetype



S-501

- Superior grip on both paved and unpaved roads
- Best In class performance
- Comfortable ride for all terrain

SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
4.00-8	6	76E	120	4.7	434	17.1	Tubetype
4.00-8	8	76F	120	4.7	434	17.1	Tubetype



S-601

- Excellent mileage with superior compound technology
- Best performance-oriented tread pattern

SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
4.00-8	6	76E	120	4.7	434	17.1	Tubetype
4.00-8	8	76F	120	4.7	434	17.1	Tubetype



ST-600

- Provides maximum traction & comfort riding
- Puncture resistance
- Highly versatile tyre, suitable for all terrains

SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
4.00-10	8	85E	120	4.7	434	17.1	Tubetype



RANGER / KRANTI

- Optimise the stability and improve the mileage
- Superior compound to ensure high mileage
- Less rolling resistance for better fuel efficiency

SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
4.00-8	6	76E	120	4.7	434	17.1	Tubetype
4.00-8	8	76F	120	4.7	434	17.1	Tubetype
4.50-10	8	85E	131	5.2	511	20.1	Tubetype



LOAD-X

- Unique tread design for best performance during application
- Designed for both dry and wet roads
- Excellent mileage with superior compound

SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
4.00-8	6	76E	120	4.7	434	17.1	Tubetype
4.00-8	8	76F	120	4.7	434	17.1	Tubetype
5.00-12	10	-	142	5.6	564	22.3	Tubetype



S-401

- Suitable for all weather conditions
- Best performance-oriented tread pattern
- Ensures better road grip and drive comfort

SIZE	PLY RATING	LOAD INDEX	SECTION WIDTH		OVERALL DIAMETER		TYPE (TT/TL)
			mm	inch	mm	inch	
4.00-8	6	76E	120	4.7	434	17.1	Tubetype
4.00-8	8	76F	120	4.7	434	17.1	Tubetype
4.50-10	8	85E	131	5.2	511	20.1	Tubetype

ATV TYRES





AT-01

- Suitable for all terrains
- Aggressive tread design for optimum traction
- Excellent performance On / Off the road

SIZE	PLY RATING	RIM WIDTH	TYPE (TT / TL)	SECTION WIDTH		OVERALL DIAMETER		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
25x8-12	6	6.5	TL	198	7.8	638	25.1	155	341	0.45	7.0	43	J/100	J/62
25x10-12	6	8.0	TL	249	9.8	638	25.1	190	418	0.45	7.0	50	J/100	J/62



AT-07

- Suitable for all terrains
- Handles dirt, gravel, hard packed surface and light mud with ease
- Superior performance On / Off the road

SIZE	PLY RATING	RIM WIDTH	TYPE (TT / TL)	SECTION WIDTH		OVERALL DIAMETER		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
				mm	inch	mm	inch	kg	lbs	bar	psi		kmph	mph
20x11-8	6	9.0	TL	282	11.1	508	20.0	155	341	0.45	6.5	43	F/80	F/50
20x10-9	4	8.0	TL	254	10.0	559	22.0	136	299	0.35	5.1	39	J/100	J/62
20x11-9	4	9.0	TL	279	11.0	508	20.0	132	290	0.35	5.1	38	J/100	J/62
22x11-9	4	9.0	TL	280	11.1	559	22.0	155	341	0.35	5.1	43	J/100	J/62
20x6-10	4	5.0	TL	152	6.0	500	19.7	106	233	0.95	14	30	J/100	J/62
21x7-10	4	5.5	TL	178	7.0	541	21.3	92	203	0.35	5.1	25	J/100	J/62
22x7-10	4	5.5	TL	175	6.9	559	22.0	100	220	0.35	5.1	28	J/100	J/62
22x11-10	4	9.0	TL	282	11.1	559	22.0	150	330	0.35	5.1	42	J/100	J/62
23x7-10	6	5.5	TL	177	7.0	584	23.0	125	275	0.45	7.0	36	J/100	J/62
23x10.5-12	6	8.5	TL	254	10.0	589	23.1	165	363	0.45	7.0	45	J/100	J/62
24x8-12	6	6.5	TL	198	7.8	615	24.1	140	318	0.45	7.0	40	J/100	J/62
26x8-12	6	6.5	TL	204	8.0	660	26.0	175	385	0.45	7.0	47	J/100	J/62
26x10-12	6	8.0	TL	241	9.5	658	25.9	200	440	0.45	7.0	52	J/100	J/62
26x12-12	6	9.5	TL	299	11.8	658	25.9	236	519	0.45	7.0	58	J/100	J/62



MICO BUTYL TUBES



RADIAL AGRICULTURE TUBES



TR-15



TR-218A

SIZE	VALVE
260/70R-15.3	TR-15
200/70R-16	TR-15
240/70R-16	TR-15
260/70R-16	TR-15
280/70R-16	TR-15
280/70R-20	TR-218A (V4.01.1)
300/70R-20	TR-218A (V4.01.1)
250/85R-20	TR-218A (V4.01.1)
280/85R-20	TR-218A (V4.01.1)
250/85R-24	TR-218A (V4.01.1)
280/85R-24	TR-218A (V4.01.1)
320/85R-24	TR-218A (V4.01.1)
340/85R-24	TR-218A (V4.01.1)
380/85R-24	TR-218A (V4.01.1)
23.1R-26	TR-218A (V4.01.1)
620/75R-26	TR-218A (V4.01.1)

SIZE	VALVE
280/85R-28	TR-218A (V4.01.1)
320/85R-28	TR-218A (V4.01.1)
340/85R-28	TR-218A (V4.01.1)
380/85R-28	TR-218A (V4.01.1)
420/85R-28	TR-218A (V4.01.1)
420/70R-28	TR-218A (V4.01.1)
440/65R-28	TR-218A (V4.01.1)
420/85R-30	TR-218A (V4.01.1)
460/85R-30	TR-218A (V4.01.1)
420/85R-34	TR-218A (V4.01.1)
460/85R-34	TR-218A (V4.01.1)
13.6R-38	TR-218A (V4.01.1)
15.5R-38	TR-218A (V4.01.1)
400/75R-38	TR-218A (V4.01.1)
420/85R-38	TR-218A (V4.01.1)
460/85R-38	TR-218A (V4.01.1)

AGRICULTURE / INDUSTRIAL & OTR TUBES



TR-13



TR-15



TR-75A



TR-218A

SIZE	VALVE
3.50-6	TR-13 (V2.01.1) / V1-08-3
3.50-8	TR-13 (V2.01.1) / V1-08-3
4.00-8	TR-13 (V2.01.1) / V1-08-3
4.00-10	TR-13 (V2.01.1) / V1-08-3
4.50-10	TR-13 (V2.01.1)
5.00-10	TR-13 (V2.01.1)
5.00-12	TR-13 (V2.01.1) / TR-15
6.00-12	TR-13 (V2.01.1) / TR-15
6.5/80-12	TR-13 (V2.01.1) / TR-15
7.00-12	TR-13 (V2.01.1) / TR-15 / TR-75A / JS-2
10.0/80-12	TR-13 (V2.01.1) / TR-15 (V2.01.2)
6.5/80-13	TR-13 (V2.01.1) / TR-15
6-14	TR-13 (V2.01.1)
6.50-14	TR-13 (V2.01.1)
9.5L-14	TR-13 (V2.01.1)
200/60-14.5	TR-13 (V2.01.1) / TR-15 (V2.01.2)
5.00-15	TR-13 (V2.01.1)
6.5/80-15	TR-13 (V2.01.1) / TR-15
7.50-15	TR-15
7.5L-15	TR-15
8.0/75-15	TR-15
9.5L-15	TR-13 (V2.01.1)

SIZE	VALVE
11L-15	TR-15
10.0/75-15.3	TR-13 (V2.01.1) / TR-15 (V2.01.2)
11.5/80-15.3	TR-13 (V2.01.1) / TR-15 (V2.01.2)
4.00-16	TR-15 (V2.01.2)
4.50-16	TR-15 (V2.01.2)
5.00-16	TR-15 (V2.01.2)
5.50-16	TR-15 (V2.01.2)
6.00-16	TR-13 (V2.01.1) / TR-15 (V2.01.2)
6.50-16	TR-15 (V2.01.2) / TR-75A (V3.02.27)
7.00-16	TR-15 (V2.01.2) / TR-75A (V3.02.27)
7.00-16	TR-218A (V4.01.1)
7.50-16	TR-15 (V2.01.2) / TR-75A (V3.02.27)
7.50-16	TR-218A (V4.01.1)
8.25-16	TR-15 (V2.01.2) / TR-75A (V3.02.27)
8.25-16	TR-218A (V4.01.1)
9.00-16	TR-15 (V2.01.2) / TR-75A (V3.02.27)
9.00-16	TR-218A (V4.01.1) / TR-15 (V2.01.2) / TR-75A (V3.02.27)
9.5-16	TR-218A (V4.01.1) / TR-15 (V2.01.2)
9.0/70-16	TR-15 (V2.01.2) / TR-218A (V4.01.1)
10.00-16	TR-15 (V2.01.2) / TR-218A (V4.01.1)
10.5-16	TR-15 (V2.01.2) / TR-218A (V4.01.1)
10.5/65-16	TR-15 (V2.01.2) / TR-218A (V4.01.1)

**AGRICULTURE / INDUSTRIAL &
OTR TUBES**



SIZE	VALVE
9.0/75-16	TR-15 (V2.01.2) / TR-218A (V4.01.1)
250/80-16	TR-15 (V2.01.2) / TR-218A (V4.01.1)
280/70-16	TR-15 (V2.01.2) / TR-218A (V4.01.1)
11L-16	TR-15 (V2.01.2) / TR-75A / TR-77
280/70-16	TR-15 (V2.01.2)
10-16.5	TR-15 (V2.01.2) / TR-218A (V4.01.1)
12-16.5	TR-15 (V2.01.2) / TR-218A (V4.01.1)
6.00-18	TR-15 (V2.01.2) / TR-218A (V4.01.1)
7.00-18	TR-75A
7.50-18	TR-15 (V2.01.2) / TR-218A (V4.01.1)
8.00-18	TR-15 (V2.01.2) / TR-218A (V4.01.1)
9.5-18	TR-15 (V2.01.2)
12.5-18	TR-14 / TR-218A (V4.01.1)
12.5/80-18	TR-15 (V2.01.2) / TR-218A (V4.01.1)
13.0/65-18	TR-15 (V2.01.2) / TR-218A (V4.01.1)
14.5/80-18	TR-218A (V4.01.1)
4.50-19	TR-14 (V2.01.3) / TR-15 (V2.01.2)
5.00-19	TR-14 (V2.01.3) / TR-15 (V2.01.2)
6.00-19	TR-14 (V2.01.3) / TR-15 (V2.01.2)
7.00-19	TR-14 (V2.01.3)
8.00-19	TR-14 (V2.01.3)
6.00-20	TR-15 (V2.01.2)
6.50-20	TR-15 (V2.01.2)
7.00-20	TR-15 (V2.01.2)
7.50-20	TR-15 (V2.01.2)
8.00/8.3-20	TR-15 (V2.01.2) / TR-218A (V4.01.1)
9.00-20	TR-218A (V4.01.1)
9.50-20	TR-218A (V4.01.1)
10.00-20	TR-218A (V4.01.1) / TR-78A (V3.09.18)
11.2-20	TR-15 (V2.01.2) / TR-218A (V4.01.1)
8.3-22	TR-218A (V4.01.1)
9.5-22	TR-218A (V4.01.1)
8.3-24	TR-218A (V4.01.1)
9.5-24	TR-218A (V4.01.1)
11.2-24	TR-218A (V4.01.1)
12.4-24	TR-218A (V4.01.1)

SIZE	VALVE
13.00-24	TR-218A (V4.01.1) / TR-179A
13.6-24	TR-218A (V4.01.1)
14.00-24	TR-218A (V4.01.1) / TR-179A / TR-220
14.00-24	TRJ-1175C / SP-1000
14.9-24	TR-218A (V4.01.1)
15.5/80-24	TR-218A (V4.01.1)
16.5/85-24	TR-218A (V4.01.1)
14.00-25	TR-218A (V4.01.1) / TR-179A / TR-220
14.00-25	TRJ-1175C / SP-1000
15.00-25	TR-218A (V4.01.1) / TR-179A / TR-220
23.5-25	TRJ-1175C
18.00-25	TR-218A (V4.01.1)
13.6-26	TR-218A (V4.01.1)
14.9-26	TR-218A (V4.01.1)
23.1-26	TR-218A (V4.01.1) / TR-220
11.2-28	TR-218A (V4.01.1)
12.4-28	TR-218A (V4.01.1)
13.6-28	TR-218A (V4.01.1)
14.9-28	TR-218A (V4.01.1)
16.9-28	TR-218A (V4.01.1)
16.9-30	TR-218A (V4.01.1)
18.4-30	TR-218A (V4.01.1)
8.3-32	TR-218A (V4.01.1)
9.5-32	TR-218A (V4.01.1)
11.2-36	TR-218A (V4.01.1)
12.4-36	TR-218A (V4.01.1)
11.2-38	TR-218A (V4.01.1)
12.4-38	TR-218A (V4.01.1)
13.6-38	TR-218A (V4.01.1)
14.00-38	TR-218A (V4.01.1)
14.9-38	TR-218A (V4.01.1)
15.5-38	TR-218A (V4.01.1)
16.9-38	TR-218A (V4.01.1)
18.4-38	TR-218A (V4.01.1)
20.8-38	TR-218A (V4.01.1)

TWO / THREE WHEELER TUBES



SIZE	VALVE
3.50-6	V1.08.3 / TR-13
3.50-8	V1.08.3 / TR-13
4.00-8	V1.08.3 / TR-13
90/100-10	V1.08.1
100/90-10	V1.08.1
2.50-10	V1.08.1
2.75/3.00-10	V1.08.1
3.50-10	V1.08.1
4.00-10	V1.08.1
4.50-10	TR-13 (V2.01.1)
5.00-10	TR-13 (V2.01.1)
3.00-12	TR-29 (V1.09.2)
3.75-12	V1.08.1
90/90-12	V1.08.1
110/90-12	V1.08.1
100/80-12	TR-29 (V1.09.2) / V1.08.1
110/80-12	TR-29 (V1.09.2) / V1.08.1
2.75/3.00-14	TR-29 (V1.09.2)
2.00/2.25-16	TR-29 (V1.09.2)
2.50/2.75-16	TR-29 (V1.09.2)
3.00-16	TR-29 (V1.09.2)
3.25-16	TR-29 (V1.09.2)
3.50-16	TR-29 (V1.09.2)
2.00/2.25-17	TR-29 (V1.09.2)
2.50-17	TR-29 (V1.09.2)
2.75/3.00-17	TR-29 (V1.09.2)
90/90-17	TR-29 (V1.09.2)

SIZE	VALVE
70/100-17	TR-29 (V1.09.2)
100/90-17	TR-29 (V1.09.2)
120/80-17	TR-29 (V1.09.2)
2.25/2.50-18	TR-29 (V1.09.2)
2.75/3.00-18	TR-29 (V1.09.2)
3.50-18	TR-29 (V1.09.2)
4.10/4.60/4.75-18	TR-29 (V1.09.2)
90/90-18	TR-29 (V1.09.2)
100/90-18	TR-29 (V1.09.2)
110/90-18	TR-29 (V1.09.2)
110/80-18	TR-29 (V1.09.2)
110/70-18	TR-29 (V1.09.2)
120/70-18	TR-29 (V1.09.2)
130/70-18	TR-29 (V1.09.2) / V1.08.1
130/60-18	TR-29 (V1.09.2) / V1.08.1
4.00/4.10-18	TR-29 (V1.09.2) / V1.08.1
2.75/3.00-19	TR-29 (V1.09.2)
3.25/3.50-19	TR-29 (V1.09.2)
110/90-19	TR-29 (V1.09.2)
120/90-19	TR-29 (V1.09.2)
110/80-19	TR-29 (V1.09.2)
120/80-19	TR-29 (V1.09.2)
130/70-19	TR-29 (V1.09.2)
3.00/3.25-21	TR-29 (V1.09.2)
80/100-21	TR-29 (V1.09.2)
90/100-21	TR-29 (V1.09.2)
2.75/3.00-23	TR-29 (V1.09.2)

ATV / LAWN & GARDEN TUBES



SIZE	VALVE
2.50/2.80-4	TR-87
3.00-4	TR-87
4.00-4	TR-87
4.10/3.50-5	TR-13
11x4.00-5	TR-13
11x6.00-5	TR-87
3.50/4.00-6	TR-13 / TR-87
13x.5.00-6	TR-13 / TR-87
15x.6.00-6	TR-13
3.50-7	TR-13
4.00-7	TR-13
3.00/3.25-8	TR-13

SIZE	VALVE
3.50-8	TR-13
145/70-8	TR-13
16x6.50-8	TR-13
16x7-8	TR-13 / TR-87
16x7.50-8	TR-13 / TR-87
18x8.50-8	TR-13
18x9.50-8	TR-13
205/60-8	TR-13
21x7.00-8	TR-13 / TR-4
20x8.00-10	TR-13
20.5x8.00-10	TR-13
21x7-10	TR-13

BUTYL INNER TUBES

BUS / LIGHT TRUCK & TRUCK TUBES



SIZE	VALVE
6.50-15	TR-15 (V2.01.2)
6.70-15	TR-15 (V2.01.2)
7.00-15	TR-15 (V2.01.2) / TR-75A (V3.02.27)
7.50-15	TR-15 (V2.01.2) / TR-75A (V3.02.27)
8.15-15	TR-15 (V2.01.2) / TR-75A (V3.02.27)
8.25-15	TR-15 (V2.01.2) / TR-75A (V3.02.27)
8.25-15	TR-75A / V3.02.27
6.00-16	TR-15 (V2.01.2)
6.50-16	TR-15 (V2.01.2) / TR-75A (V3.02.27)
7.50-16	AB 15 82 / TR-75A (V3.02.27)
8.25-16	TR-77A (V3.09.16) / TR-75A (V3.02.27)
9.00-16	TR-77A (V3.09.16) / TR-75A (V3.02.27)
10.00-16	TR-77A / V3.09.15 / TR-177A / V3.02.16
12.00-18	TR-76A / V3.02.14

SIZE	VALVE
13.00-18	TR-76A / V3.09.14
6.50-20	TR-15 / V3.01.2
7.50-20	TR-15 / V3.01.2
8.25-20	TR-175A / V3.09.17
9.00-20	TR-175A / V3.09.17
9.00R-20	TR-175A / V3.09.17
10.00-20	TR-78A (V3.09.18)
10.00R-20	TR-78A (V3.09.18)
11.00-20	TR-78A (V3.09.18)
11.00R-20	TR-78A (V3.09.18)
12.00-20	TR-78A (V3.09.18)
12.00R-20	TR-78A (V3.09.18)
12.00-24	TR-78A (V3.09.18)
12.00R-24	TR-78A (V3.09.18)

INDUSTRIAL FORKLIFT & LIFT TRUCK TUBES



SIZE	VALVE
4.00-8	TR-13 / TR-87 / V1.08.3
4.00-8	TR-13 / JS-2 / V1.08.3
5.00-8	TR-13 / JS-2
5.00-8	TR-13 / TR-87 / JS-2
16x6.50-8	TR-13
16x7-8	TR-13 / JS-2
18x8.5-8	TR-13 / JS-2
5.00-10	JS-2
5.00-10	TR-13 (V2.01.1)
5.00-10	JS-2
6.50-10	V1.08.1 / TR-15
6.50-10	JS-2
6.50-10	TR-75A
7.00-12	TR-75A
7.00-12	JS-2
23X5	TR-87
23X5	JS-2

SIZE	VALVE
2.15-15	TR-75A / JS-2
7.00-15	TR-75A / TR-15
7.00-15	JS-2
7.50-15	TR-75A
7.50-15	JS-2
8.15-15	TR-75A
8.15-15	JS-2
8.25-15	TR-15 (V2.01.2) / TR-75A
8.25-15	JS-2
250-15	JS-2
250-15	TR-15
300-15	TR-75A / TR-78A
300-15	JS-2
9.00-20	TR-78A (V3.09.18) / TR-175A
10.00-20	TR-78A (V3.09.18)
11.00-20	TR-78A (V3.09.18)
12.00-20	TR-78A (V3.09.18)

PASSENGER CAR TUBES



TR-13



TR-15

SIZE	VALVE
145-10	TR-13 (V2.01.1)
125/135-12	TR-13 (V2.01.1)
125/135-12	TR-13 (V2.01.1)
145/70R-12	TR-13 (V2.01.1)
135/80R-12	TR-13 (V2.01.1)
175/70R-12	TR-13 (V2.01.1)
155/80D-12	TR-13 (V2.01.1)
155/80R-12	TR-13 (V2.01.1)
135/70R-13	TR-13 (V2.01.1)
135R/145R-13	TR-13 (V2.01.1)
140/150R-13	TR-13 (V2.01.1)
145/70R-13	TR-13 (V2.01.1)
145/70R-13	TR-13 (V2.01.1)
155/165R-13	TR-13 (V2.01.1)
165/65R-13	TR-13 (V2.01.1)
175/80R-13	TR-13 (V2.01.1)
175R/185R-13	TR-13 (V2.01.1)
135/70R-13	TR-13 (V2.01.1)
145R/70-13	TR-13 (V2.01.1)
155/70R-13	TR-13 (V2.01.1)
165/70R-13	TR-13 (V2.01.1)
175/70R-13	TR-13 (V2.01.1)
6.00/6.50-13	TR-13 (V2.01.1)
135R/145R-14	TR-13 (V2.01.1)
145/70R-14	TR-13 (V2.01.1)
140R/150R-14	TR-13 (V2.01.1)
155R/165R-14	TR-13 (V2.01.1)
175/70R-14	TR-13 (V2.01.1)
4.00/4.50-14	TR-13 (V2.01.1)
165/175/70R-14	TR-13 (V2.01.1)
175/185R-14	TR-13 (V2.01.1)
195/205R-14	TR-13 (V2.01.1)
165/175/65R-14	TR-13 (V2.01.1)
165/175/70R-14	TR-13 (V2.01.1)
185/70R-14	TR-13 (V2.01.1)

SIZE	VALVE
195/70R-14	TR-13 (V2.01.1)
170R/180R-14	TR-13 (V2.01.1)
195R/205R-14	TR-13 (V2.01.1)
205/70R-14	TR-13 (V2.01.1)
205/80R-14	TR-13 (V2.01.1)
125R-15	TR-13 (V2.01.1)
135R/145R-15	TR-13 (V2.01.1)
145/70R-15	TR-13 (V2.01.1)
140R/150R-15	TR-13 (V2.01.1)
155R/165R-15	TR-13 (V2.01.1)
175/70R-15	TR-13 (V2.01.1)
160/R-15	TR-13 (V2.01.1)
125-15	TR-13 (V2.01.1)
4.00/4.50-15	TR-13 (V2.01.1)
5.00-15	TR-13 (V2.01.1)
5.90-15	TR-13 (V2.01.1)
F78-15	TR-13 (V2.01.1)
175/185R-15	TR-13 (V2.01.1)
165/175/70R-15	TR-13 (V2.01.1)
175/185/70R-15	TR-13 (V2.01.1)
175/185/70R-15	TR-13 (V2.01.1)
195/205R-15	TR-13 (V2.01.1)
205/70R-15	TR-13 (V2.01.1)
215/225/235/70R-15	TR-13 (V2.01.1)
215/225R-15	TR-13 (V2.01.1)
235/75R15	TR-13 (V2.01.1)
235/70R15	TR-13 (V2.01.1)
225/70R15	TR-13 (V2.01.1)
255/70R15	TR-13 (V2.01.1)
175/185R-16	TR-13 (V2.01.1)
195/205/215/70R-16	TR-13 (V2.01.1)
195/205/215/70R-16	TR-13 (V2.01.1)
175R/185R-16	TR-15 (V2.01.2)
195R/205R-16	TR-15 (V2.01.2)
215R/225R-16	TR-15 (V2.01.2)

BUTYL INNER TUBES


IMPLEMENT & TRAILER TUBES



SIZE	VALVE
6.70-15	TR-15 (V2.01.2)
7.60-15	TR-15 (V2.01.2) / TR-75A (V3.09.13)
9.5L-15	TR-75 A (V3.09.13)
11L-15	TR-15 (V2.01.2) / TR-218A (V4.01.1)
12.5L-15	TR-15 (V2.01.2) / TR-218A (V4.01.1)

SIZE	VALVE
10.0/75-15.3	TR-15 (V2.01.2) / TR-218A (V4.01.1)
11.5/80-15.3	TR-15 (V2.01.2) / TR-218A (V4.01.1)
11L.16	TR-15 (V2.01.2) / TR - 75A (V3.09.13) TR-77A / AC3 5 82 / V3.09.16
12.5L-16	TR-15 (V2.01.2)

UTILITY VEHICLE TUBES



SIZE	VALVE
145-10	TR-13 (V2.01.1)
5.00-10	TR-13 (V2.01.1)
4.50-12	TR-13 (V2.01.1)
5.00-12	TR-13 (V2.01.1)
145/80D-12	TR-13 (V2.01.1)
155/80D-12	TR-13 (V2.01.1)

SIZE	VALVE
155/80R-12	TR-13 (V2.01.1)
165/70R-13	TR-13 (V2.01.1)
165/70-13	TR-13 (V2.01.1)
165/175/70-14	TR-13 (V2.01.1)
195/205R-14	TR-13 (V2.01.1)
185R-16	TR-13 (V2.01.1) / TR-15

FLAPS



SIZE
5.00-8
6.00-9
6.50-10
7.00-12
8.25-15
6.00-16
6.50-16
7.00-16
7.50-16
8.25-16
9.00-16

SIZE
7.50-20
8.25-20
9.00-20
10.00-20
11.00-20
12.00-20
12.00-24
13.00-24
14.00-24
14.00-25
18.00-25

MICO TYRES

78, NIJATAM NAGAR

JALANDHAR 144002 PUNJAB (INDIA)

MOBILE-+91-9814094647

EMAIL-micoindia78@yahoo.com

MR SHOAB NASIR (COUNTRY HEAD)

AUSTRALIA

DREAMZ PTY LTD

ABN- 24644503935

MOBILE- 0469-801515

Dreamz@outlook.com.au



www.micoindia.com